


- C 1 Main tuning
- C 2 Main tuning
- C 3 Padder 600 mmf.
- C 4 100 mmf.
- C 5 .05 mfd.
- C 6 .05 mfd.
- C 7 100 mmf.
- C 8 .005 mfd.
- C 9 220 mmf.
- C 10 .01 mfd.
- C 11 .05 mfd.
- C 12 .01 mfd.
- C 13 .005 mfd.
- C 14 .005 mfd.
- C 15 20 mfd.
- C 16 20 mfd.
- C 17 .01 mfd.
- C 18 20 mfd
- R 1 4,000 ohms
- R 2 22,000 ohms
- R 3 10,000 ohms 2w
- R 4 2.2 meg.
- R 5 47,000 ohms
- R 6 1 meg.
- R 7 10 meg.
- R 8 500,000 ohms
- R 9 220,000 ohms
- R 10 470,000 ohms
- R 11 470,000 ohms
- R 12 330 ohms 2w.
- R 13 1 meg.
- R 14 2,000 ohms
- R 15 1,500 ohms 2w
- *R 16 300 ohms 10w

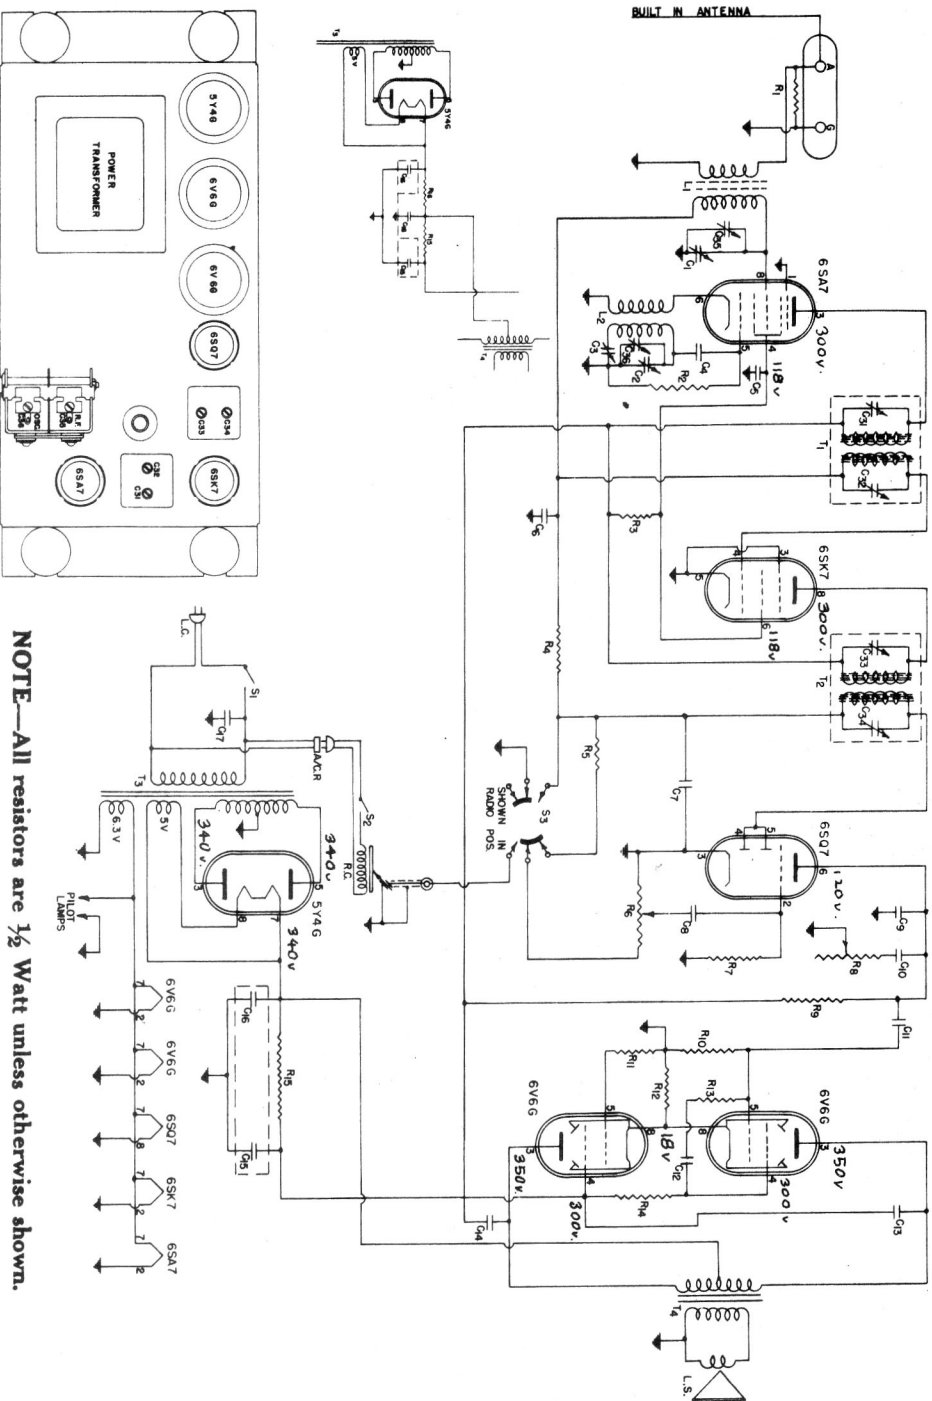

ALIGNMENT PROCEDURE

NOTE—All resistors are 1/2 Watt unless otherwise shown.

CONNECT S.G. OUTPUT	INPUT FREQUENCY	RECEIVER DIAL SETTING	ADJUST	CIRCUIT RESONATED	REMARKS
*6SA7 Det. Grid	456 KC.	Gang at trim.	C34,C33 C32,C31	No. 2 I.F. No. 1 I.F.	Adjust for Max. output.
†Ant. Lead	600 KC.	600 KC.	C3	Oscillator	Adjust for resonance.
Ant. Lead	1500 KC.	1500 KC.	C36 C35	Oscillator R.F.	Adjust for Max. output.

*Short oscillator section of gang through 0.1 mfd. capacitor to chassis.
†Before proceeding with R.F. alignment see that pointer is set over last division on right hand side of dial scale with gang at minimum.

1946-47
AC-MODELS
DR-103
DR-103
DELUXE
DR-104