
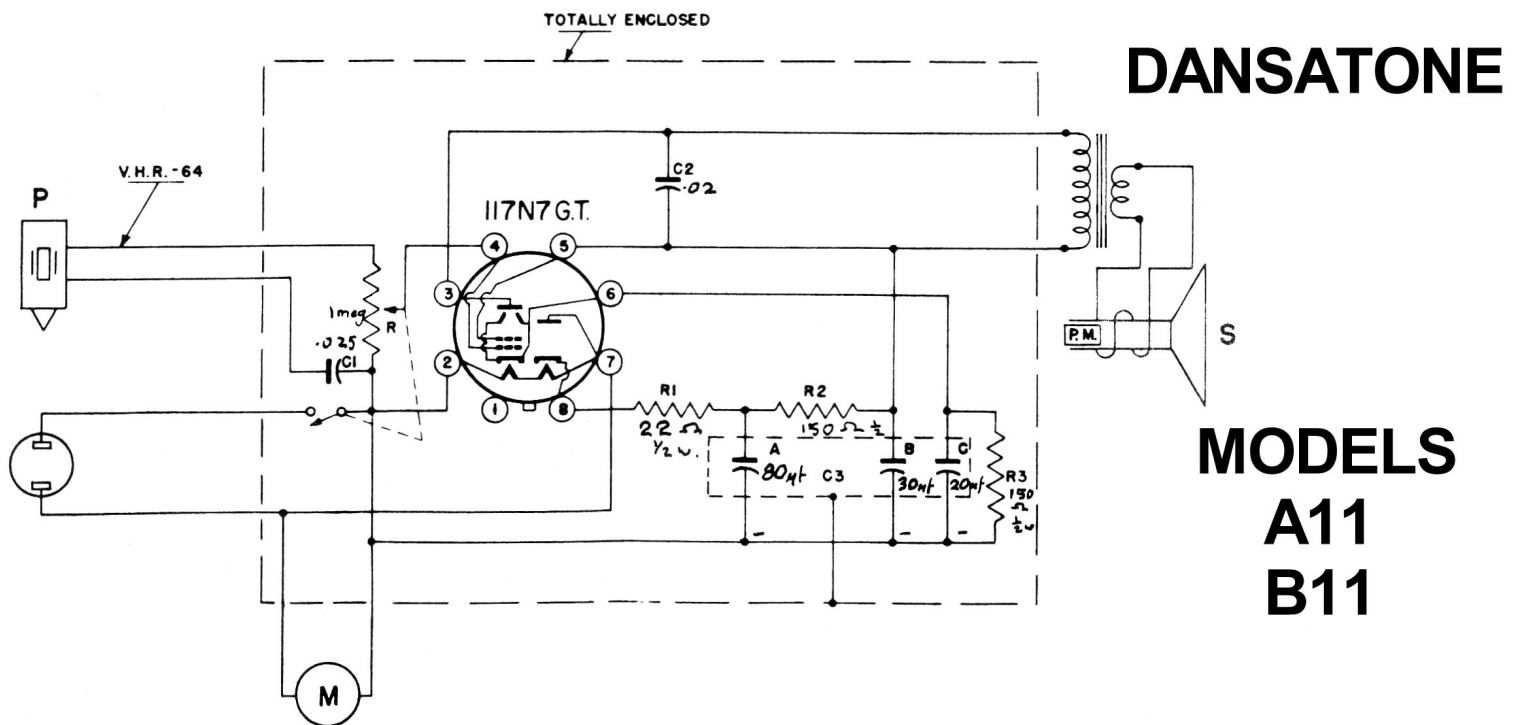


Addison Record Player Amplifiers

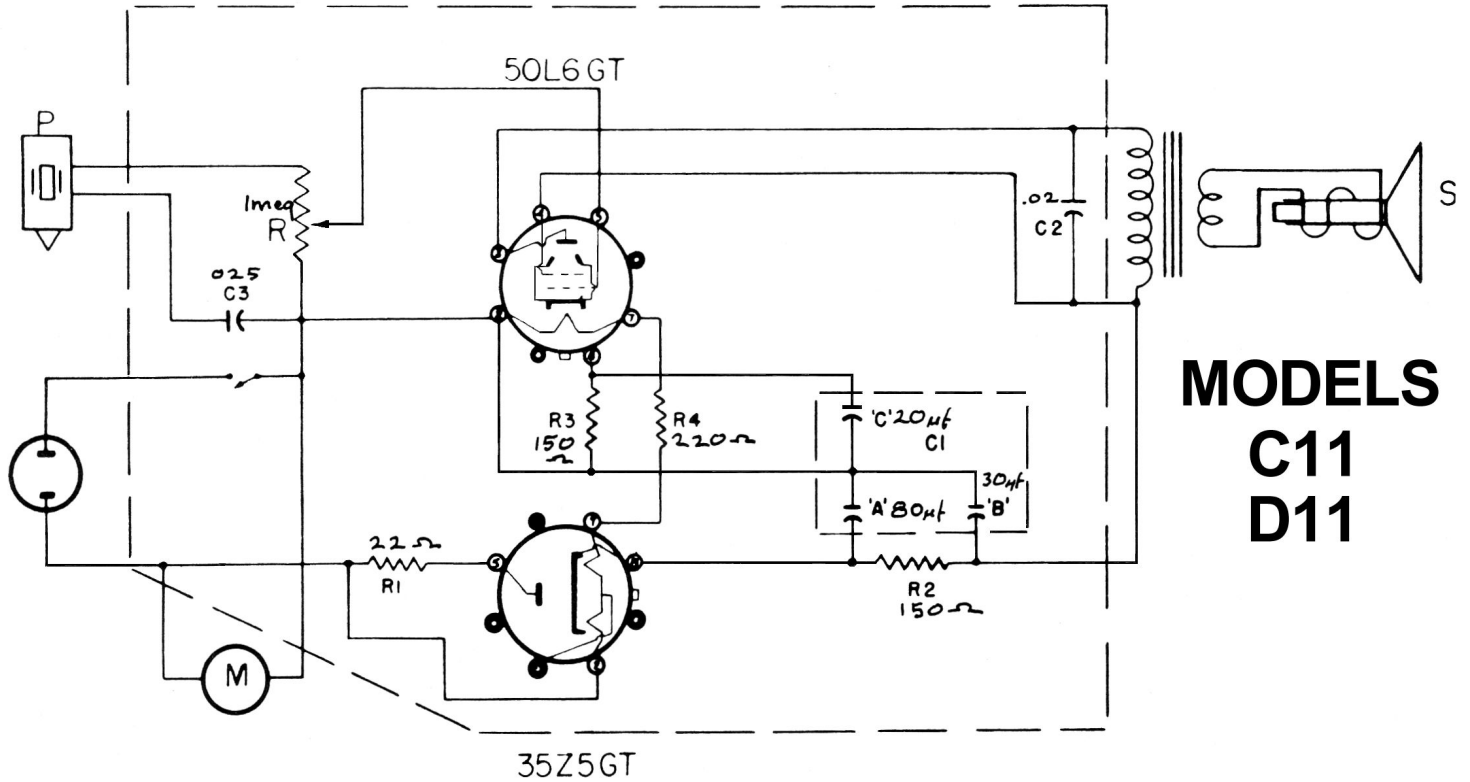

If Dansatone fails to operate, check the power cord to determine that proper contact has been made. If satisfactory, remove screws holding the panel and remove the unit. A visual inspection may only be necessary, however, if all is in order, remove the Volume Control Knob, Hex Nut and Mounting Screw. This permits the Amplifier to be removed and all component parts may be checked by aid of the schematic.