


Alignment Procedure for CURTIS MATHES K-8, K-8A

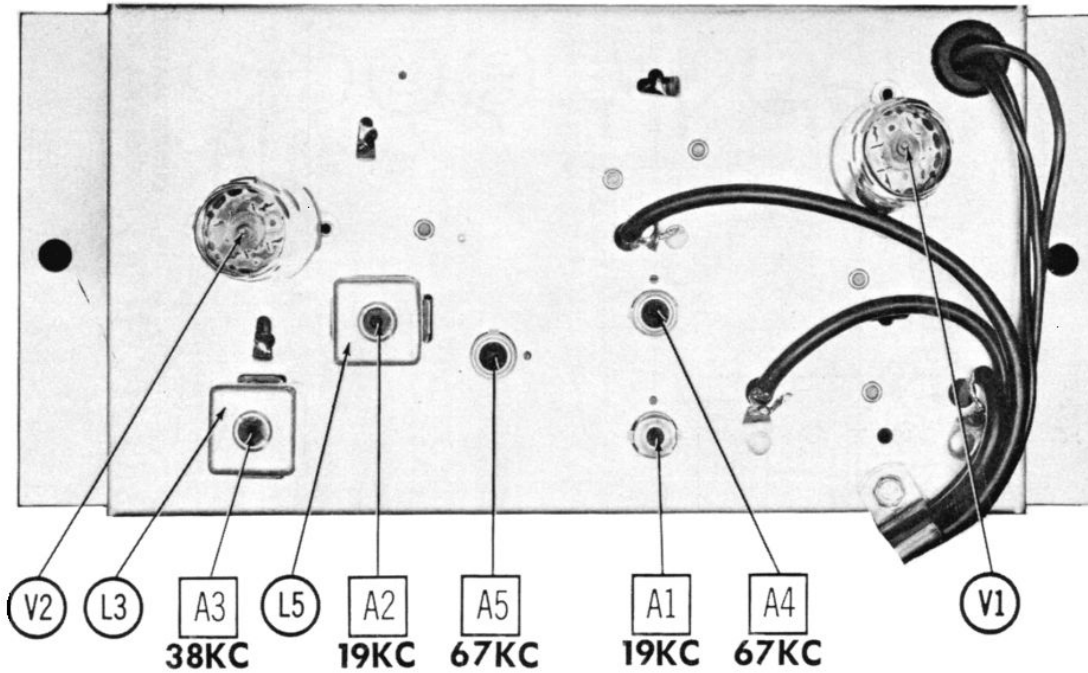

MULTIPLEX ALIGNMENT USING FM STEREO GENERATOR AND AUDIO OSCILLATOR

	SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
1.	19KC to MPX input, low side to chassis.	Vert. Input thru 47K to point A low side to chassis.	A1	Adjust for maximum.
2.	"	Vert. Input to pin 2 of V3 low side to chassis.	A2	"
3.	"	Vert. Input to point B low side to chassis.	A3	"
4.	67KC to input jack, low side to chassis.	Vert. Input thru 47K to point C low side to chassis.	A4, A5	Adjust for MINIMUM.