






Crosley B-1465 Battery Operated Receiver

SOCKET VOLTAGE CHART

NOTES:

1. THESE ARE BOTTOM VIEWS OF SOCKETS.
2. MEASURE VOLTAGES FROM SOCKET LUG TO CHASSIS.
3. THESE VOLTAGES MEASURED USING A 20,000 OHM PER VOLT D.C. VOLTMETER.
4. W.J. WIRING JUNCTION.
5. N.C. NO CONNECTION.
6. VOL. ON FULL, NO SIGNAL.

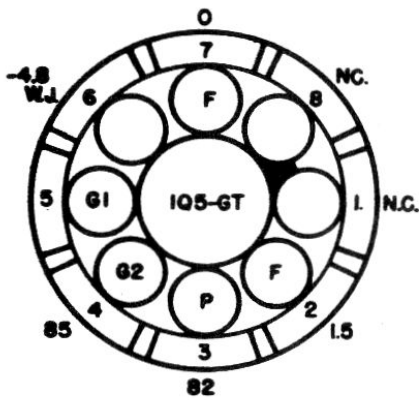

Crosley B-1465 Battery Operated Receiver Alignment Data

ALIGNMENT CHART

Alignment Sequence	Signal Generator Output			Position of Tuning Dial	Adjust for Maximum Output
	Frequency in kc.	In Series with	To		
1	455	200 m mf.	Ant.	1,620	A & B
2	1,400	200 m mf.	Ant.	1,400	C
3	1,400	200 m mf.	Ant.	1,400	D
4	1,400	200 m mf.	Ant.	1,400	E