


Note: R-3, R-4, R-10, R-11 = 10%
(Low Noise)

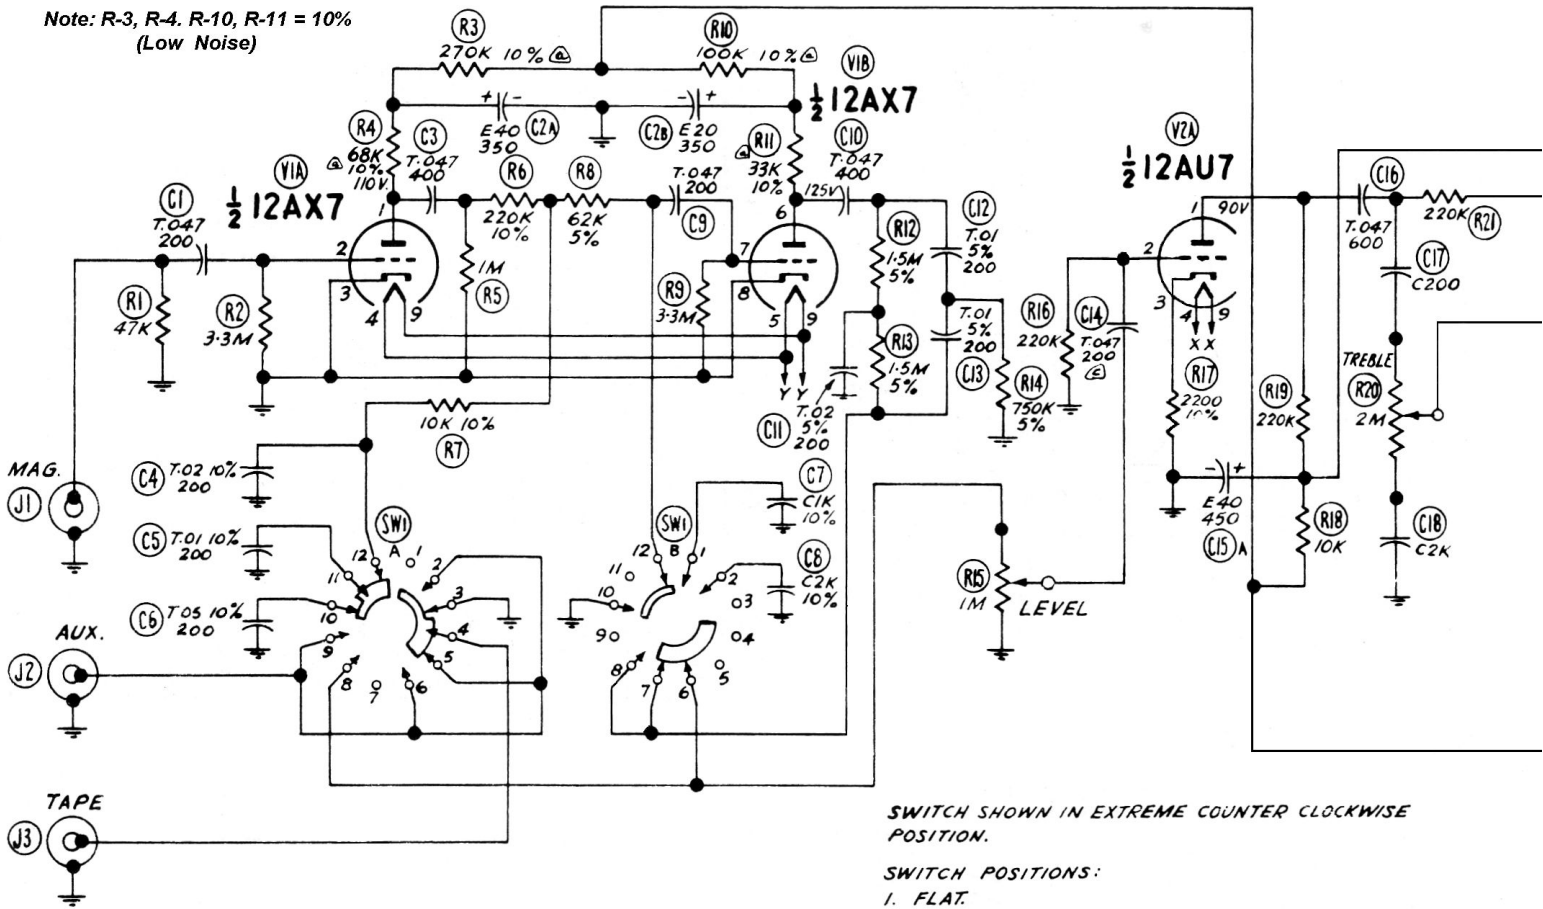

COMPONENT VALUES

RESISTORS : HALF WATT UNLESS OTHERWISE NOTED.
20% TOLERANCE UNLESS OTHERWISE NOTED.
K = 1000 OHMS.
M = 1,000,000 OHMS.

CONDENSERS: T = TUBULAR, FOLLOWED BY CAP. IN MFD. AND D.C.W.V.
E = ELECTROLYTIC, FOLLOWED BY CAP. IN MFD. AND D.C.W.V.
C = CERAMIC, FOLLOWED BY CAP. IN MMFD. AND TOL. IF CRITICAL.


SWITCH SHOWN IN EXTREME COUNTER CLOCKWISE POSITION.

SWITCH POSITIONS:

1. FLAT.
2. R.I.A.A
3. EARLY 78
4. AUX.
5. TAPE.

ALL VOLTAGES MEASURED TO CHASSIS WITH 20,000 OHM/VOLT METER AT 117 LINE VOLTAGE.

CONNECT D.C. VOLTMETER ACROSS OUTPUT TRANSFORMER PRIMARY AND ADJUST D.C. BALANCE CONTROL FOR ZERO VOLTAGE.

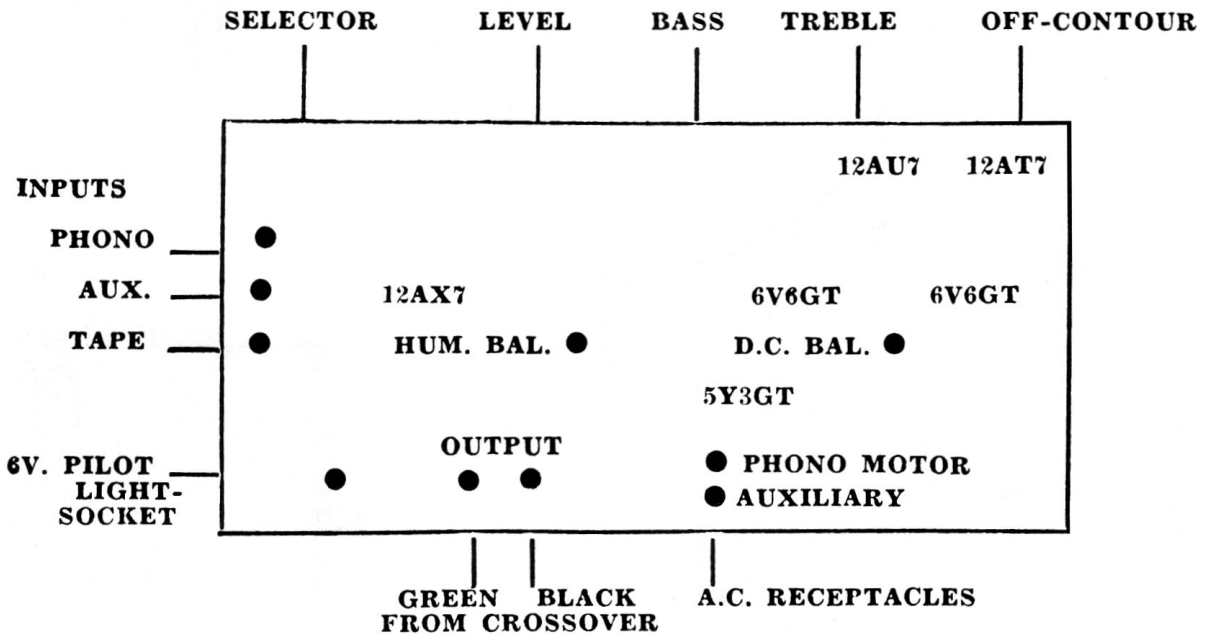

Electrohome 350, Concord Custom, Concord Custom A

