


Electrohome 4A-22A & 4A-23A

COMPONENT VALUES


RESISTORS: HALF WATT UNLESS OTHERWISE SPECIFIED.
20% TOLERANCE, UNLESS OTHERWISE NOTED.
K = 1,000 OHMS
M = 1,000,000 OHMS

CONDENSERS: T = TUBULAR, FOLLOWED BY CAP IN MFD. AND D.C.W.V.
E = ELECTROLYTIC, FOLLOWED BY CAP IN MFD. & D.C.W.V.
C = CERAMIC, FOLLOWED BY CAP IN MMFD. & TOL. IF CRITICAL


ALL VOLTAGES MEASURED TO B- WITH 20,000 OHM/VOLT METER, 117 VOLTS, 60 CYCLE LINE AND ZERO SIGNAL INPUT.

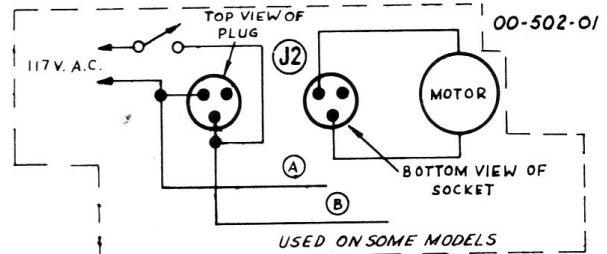

CAN. No.	DATE	CHANGE	CN'R
57-6#	7-11-57	WAS: C5000 (C)	

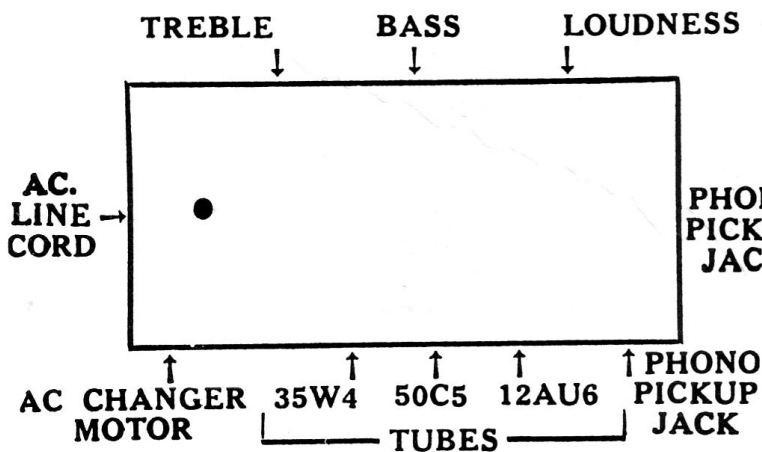

MODEL 4A22A

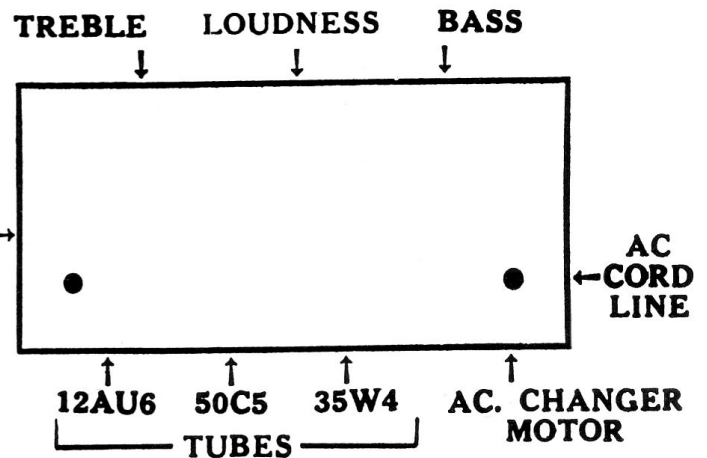

MODEL 4A23A