


Electrohome 4B-30A & 4B-31A

COMPONENT VALUES:


RESISTORS: HALF WATT, UNLESS OTHERWISE NOTED.
 20% TOLERANCE, UNLESS OTHERWISE NOTED.
 K = 1000 OHMS
 M = 1,000,000 OHMS

CONDENSERS: T = TUBULAR, FOLLOWED BY CAP IN MFD AND D.C.W.V.
 E = ELECTROLYTIC, FOLLOWED BY CAP. IN MFD & D.C.W.V.
 C = CERAMIC, FOLLOWED BY CAP. IN MMFD & VOL. IF CRITICAL

ALL VOLTAGES MEASURED TO B- WITH 20,000 OHM/VOLT METER,
 117 VOLTS, 60 CYCLE LINE AND ZERO SIGNAL INPUT.

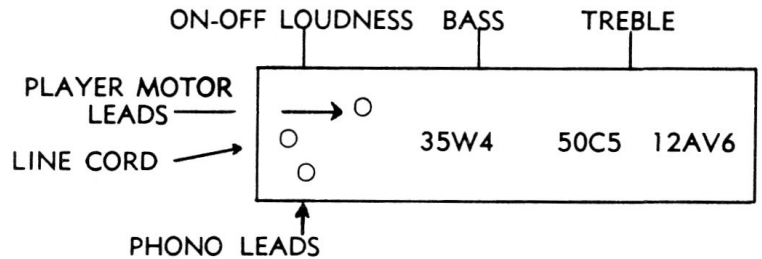


SPEAKER CONNECTIONS

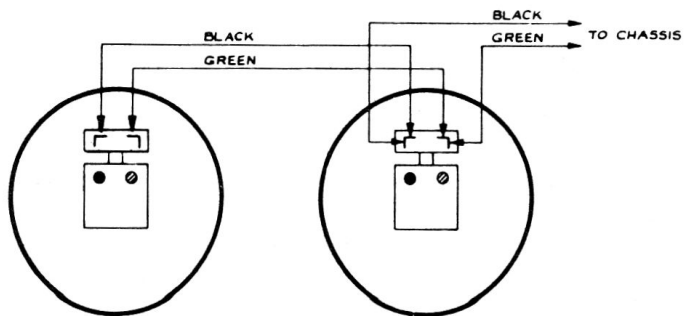

00-209-16

4B-30A

ARROWS INDICATE PIN JACK TIPS.

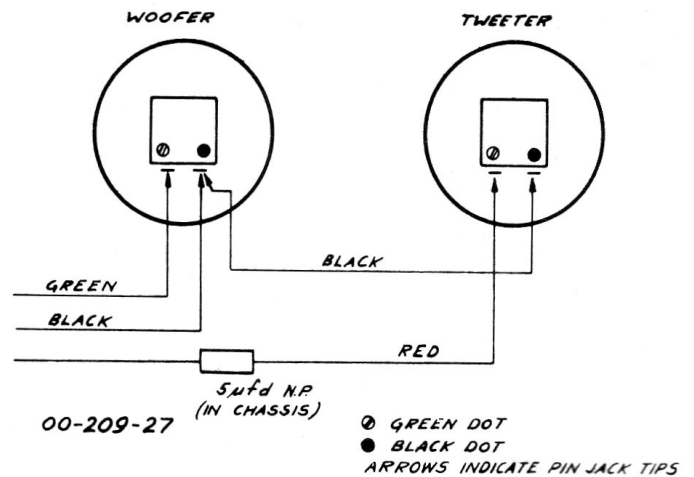

00-209-27

4B-31A

ARROWS INDICATE PIN JACK TIPS