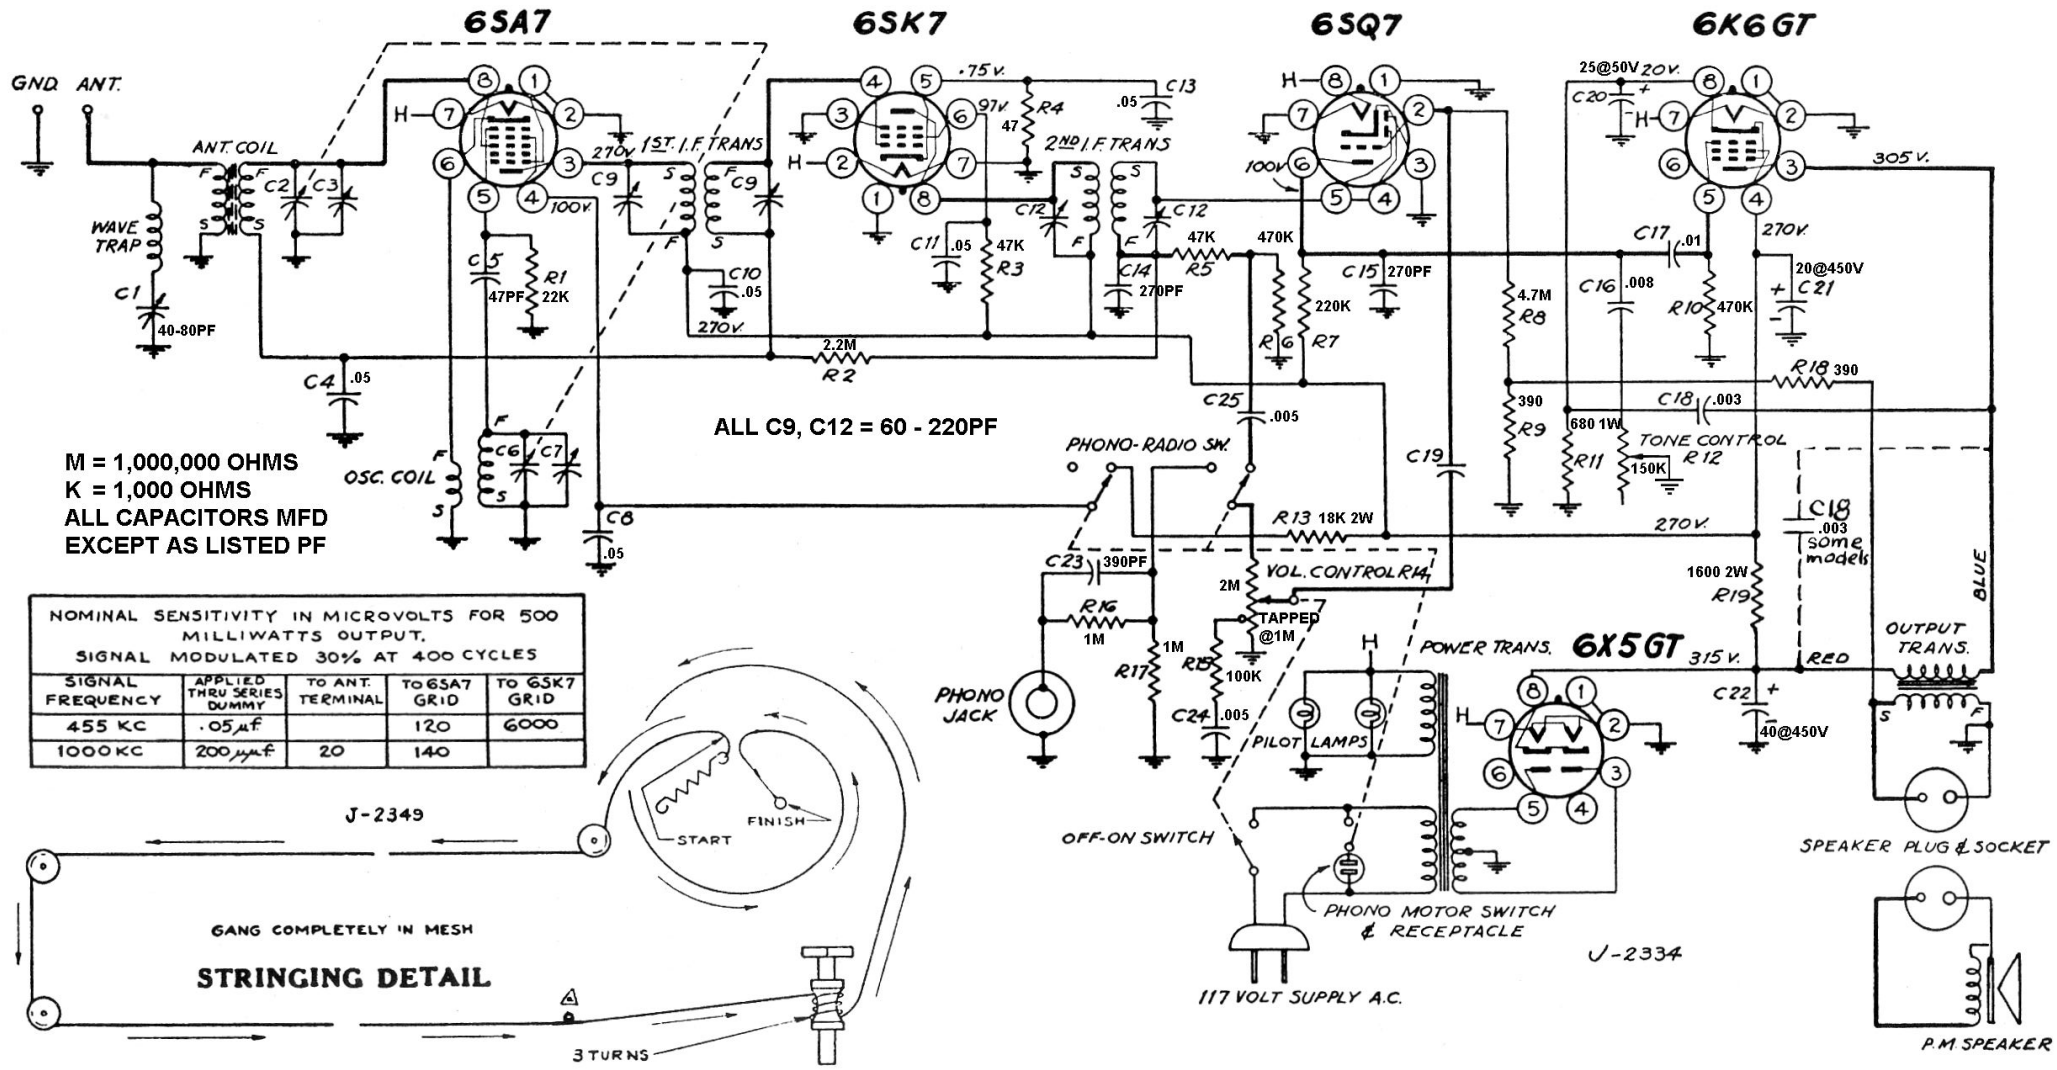

NOMINAL SENSITIVITY IN MICROVOLTS FOR 500 MILLIWATTS OUTPUT. SIGNAL MODULATED 30% AT 400 CYCLES				
SIGNAL FREQUENCY	APPLIED THRU SERIES DUMMY	TO ANT. TERMINAL	TO 6SA7 GRID	TO 6SK7 GRID
455 KC	.05 μf		120	6000
1000 KC	200 μμf	20	140	

"HOLLYWOOD"	"SALON"
"COSMOPOLITAN-3"	"CARLETON-3"
FACTORY MODEL	FACTORY MODEL
PC3C51-419	PC3C51-439
-419Z	-439Z
	PC3C51-449
	-449Z
PC3C51-429	PC3C51-459
-429Z	-459Z

"CONTINENTAL"

Factory Model

PCC51-418, 428

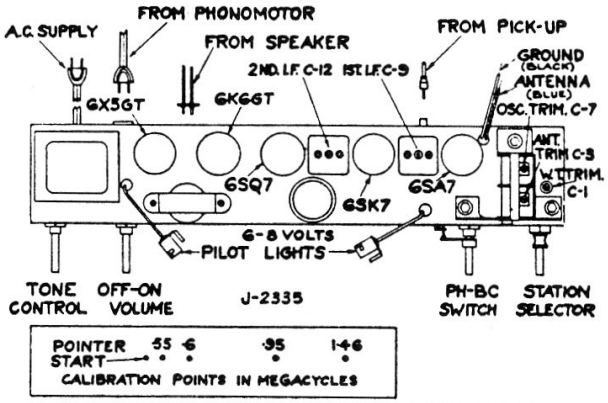

CHASSIS LAYOUT CHART

SPECIFICATIONS

Standard Broadcast Range	540 Kc — 1700 Kc
Intermediate Frequency	455 Kc
Power Consumption ((Radio Only)	55 Watts
Power Consumption (Radio & Phono)	65 Watts
Undistorted Output	4 Watts
Maximum Power Output	6 Watts

Electrohome Carleton/3, Continental, Cosmopolitan/3, Hollywood, Salon.