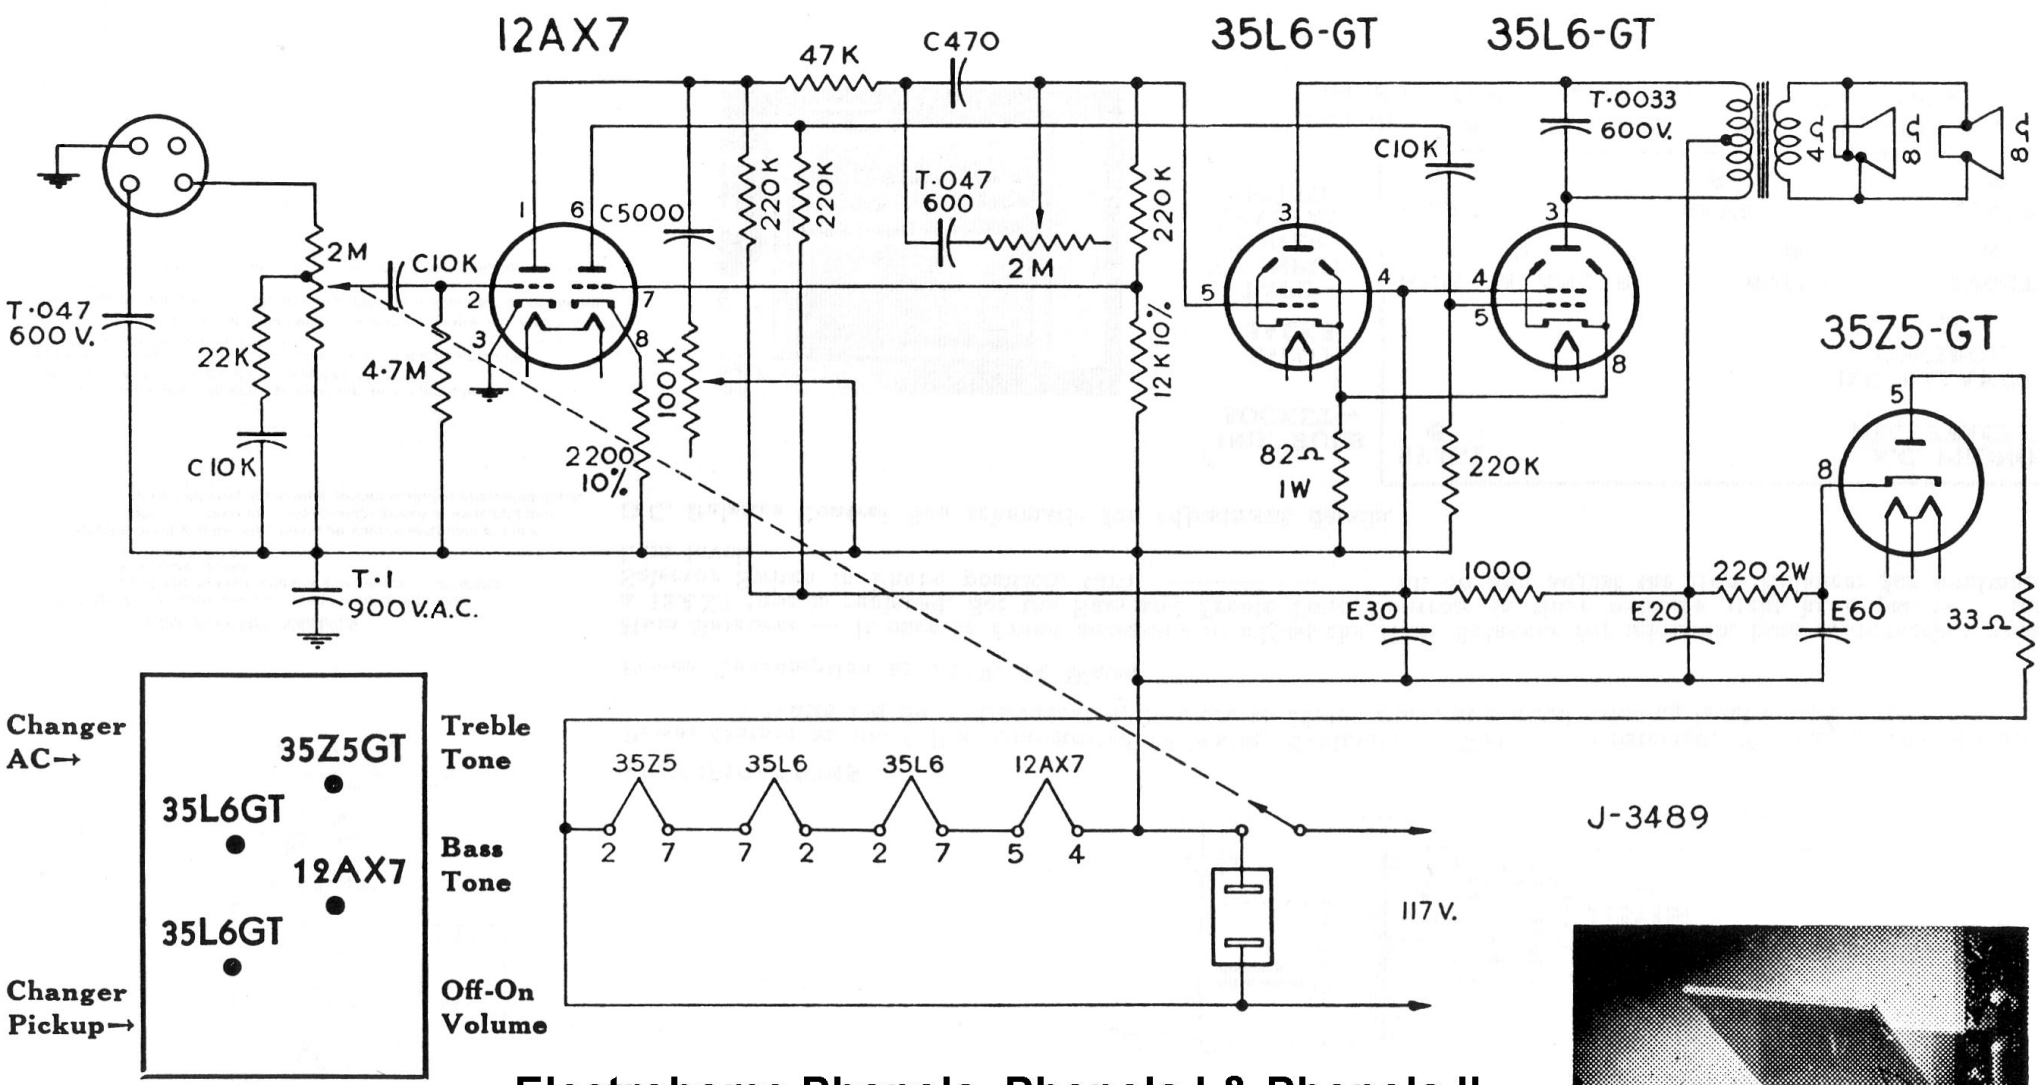

Electrohome Phonola, Phonola I & Phonola II

Note: Phonola II has Tweeter

SPECIFICATIONS

Power Output—Undistorted	1.5 Watts
Maximum	2.0 Watts
Frequency Response	50 to 10,000 C.P.S.
Power Consumption	50 Watts

COMPONENT VALUES

RESISTORS:
HALF WATT UNLESS OTHERWISE SPECIFIED
20% TOL., UNLESS OTHERWISE SPECIFIED
K: 1,000 OHMS
M: 1,000,000 OHMS

CONDENSERS:
T: TUBULAR, FOLLOWED BY CAP. IN Mfd. & D.C.W.V.
E: ELECTROLYTIC FOLLOWED BY CAP. IN Mfd. & D.C.W.V.
C: CERAMIC, FOLLOWED BY CAP. IN MMfd. & TOL. IF CRITICAL
M: MICA, FOLLOWED BY CAP. IN MMfd. & TOL. IF CRITICAL