


AMPLIFIER SCHEMATIC

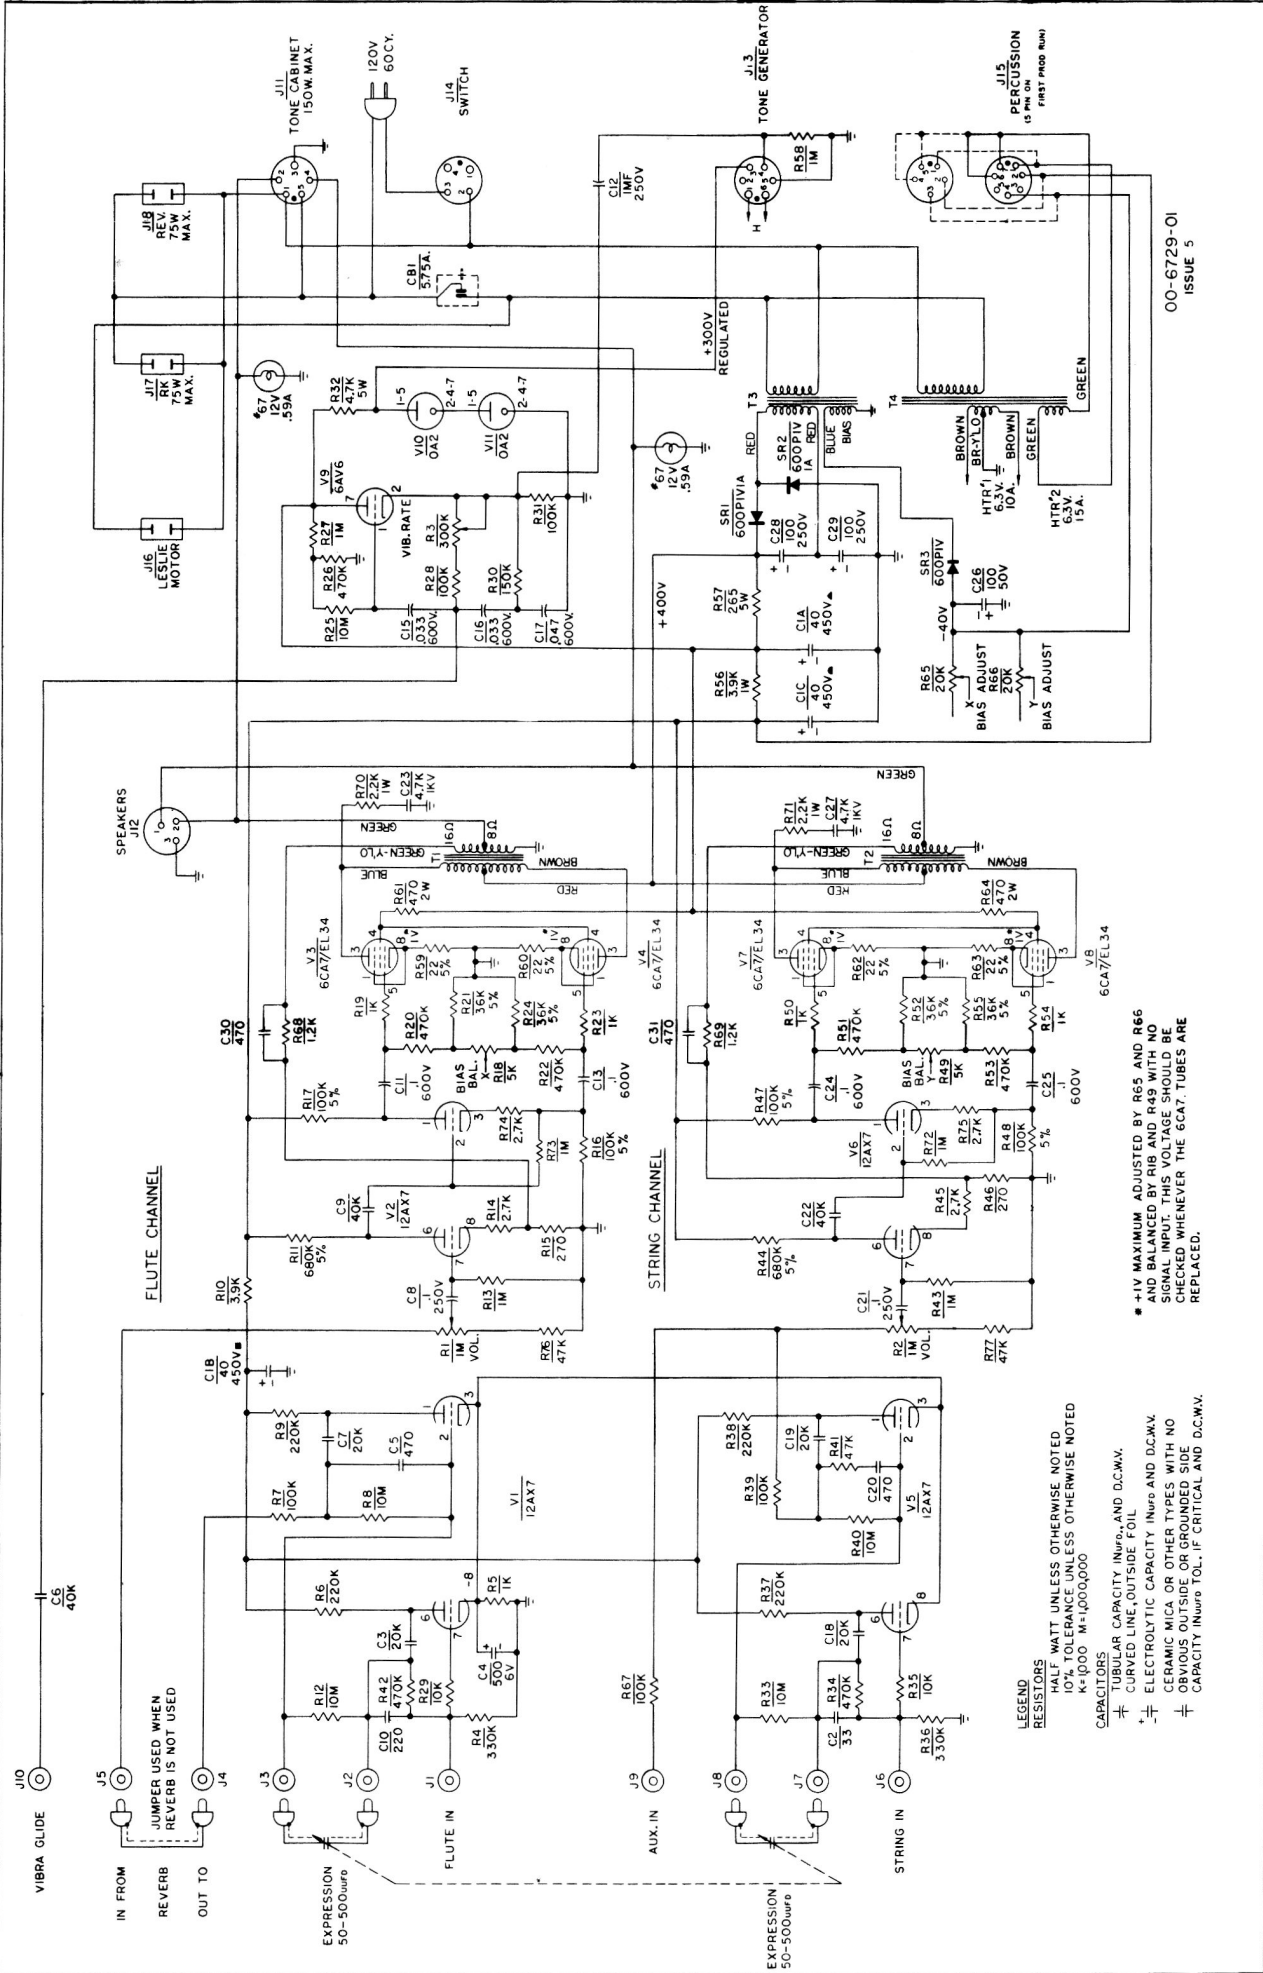

* +1V MAXIMUM ADJUSTED BY R65 AND R66 AND BALANCED BY R18 AND R49 WITH NO SIGNAL INPUT. THIS VOLTAGE SHOULD BE CHECKED WHENEVER THE 6CA7 TUBES ARE REPLACED.

LEGEND
RESISTORS
HALF WATT UNLESS OTHERWISE NOTED
10% TOLERANCE UNLESS OTHERWISE NOTED
K=1000 M=1,000,000
CAPACITORS
TUBULAR CAPACITY IN μV., AND D.C.M.V.
CURVED LINE, OUTSIDE FOIL
ELECTROLYTIC CAPACITY IN μF. AND D.C.M.V.
CERAMIC MICA OR OTHER TYPES WITH NO OBVIOUS OUTSIDE OR GROUNDED SIDE
CAPACITY IN μF. TOL., IF CRITICAL AND D.C.M.V.