


SPECIFICATIONS

- Standard Broadcast Range 535 to 1605 Kc.
- Intermediate Frequency 455 Kc.
- Current Consumption at 6.8 volts 6.4 amps.
- Undistorted Output 2.2 watts
- Maximum Power Output 4.0 Watts

**Electrohome Travellaire
6 Volt Automobile Radio**

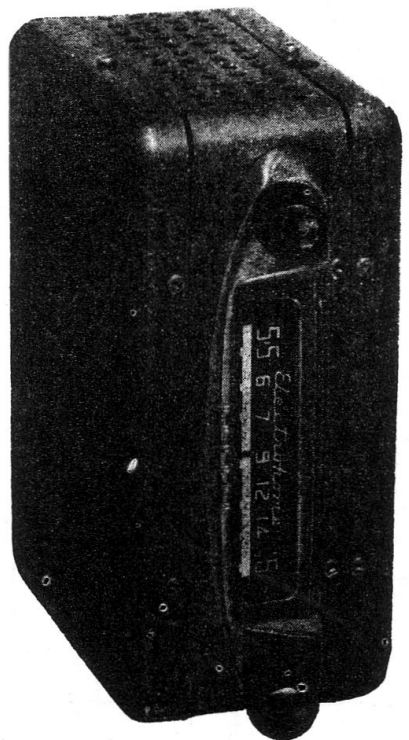

INTERMEDIATE FREQUENCY: 455 K.C.

ALIGNMENT AND SENSITIVITY

STEP	SIGNAL	GENERATOR	THRU	ADJUST	FOR	ADJUST	FOR
1	455	6BE6 I.F.	1/1 PIN	05-4d	—	—	—
2	455	6BE6 #7	05-4d	—	—	—	—
3	1605	INT./HA. ANTENNA SOCKET	30-4d	30-4d	—	—	—
4	1400	ANTENNA SOCKET	30-4d	1400 KC.	—	—	—
5	AFTER SET IS INSTALLED WITH ACTUAL ANT. TUNE IN WEAK SIGNAL NEAR 1400 KC. AND REPEAK TRIM						

COMPONENT VALUES

RESISTORS: HALF WATT, UNLESS OTHERWISE NOTED
20% TOLERANCE, UNLESS OTHERWISE NOTED
K = 1000 OHMS.
M = 1000,000 OHMS.
C - CERAMIC, FOLLOWED BY CAP. IN μ F. FOL. IF CRITICAL.
M - MICA, FOLLOWED BY CAP. IN μ F. FOL. IF CRITICAL.

