


**ALIGNMENT AND SENSITIVITY**  
SIGNAL GENERATOR MODULATED 30% AT 400 C.F.S.

STEP	APPLY SIGNAL AT KC.	THRU SERIES TUBES	SET GANG ADJUST FOR MAX OUTPUT FOR 500 MILLIVOLTS	NOMINAL SENSITIVITY 2500 MICROVOLTS
1	455	6AV6 1/2 1/2 P.M.	15F. 1/4"	60
2	455	6B76 1/2 P.M.	400 GAUSS	70
3	1460	6BE6 70M.	B.C. ANT. & TRIMM.	3
4	1460	6BE6 200 200 1/4"	B.C. ANT. & TRIMM.	3
5	600	ANT. 200 200 1/4"	B.C. OSC. PILOTT.	10
6	16 MC.	ANT. 400 1/2 400 1/2	1/4" OSC. ANT. TRIMM.	15
7	10 MC.	ANT. 400 1/2	CHECK PHONO V.	

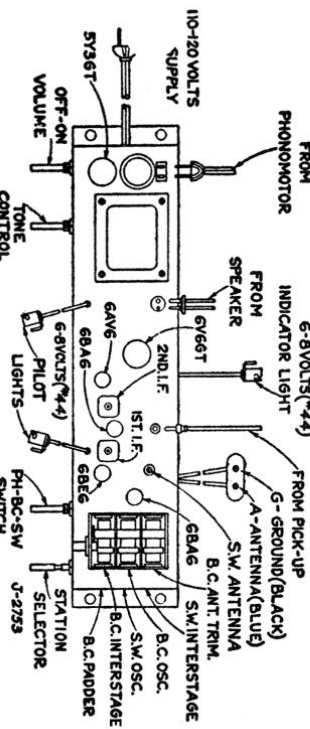

ALL VOLTAGES ± 10% MEASURED TO CHASSIS WITH 20,000 OHM / VOLT METER, 117 V. LINE. RADIO-PHONO SWITCH SHOWN IN PHONO POSITION.

**COMPONENT VALUES**  
RESISTORS: HALF WATT UNLESS OTHERWISE NOTED.  
20% TOLERANCE UNLESS OTHERWISE NOTED.  
K - 1000 OHMS.  
M - 1,000,000 OHMS.  
E - ELECTROLYTIC, FOLLOWED BY CAP IN MFD. AND D.C. W.V.  
C - CERAMIC, FOLLOWED BY CAP IN MFD. & TOL. IF CRITICAL.  
M - MICA, FOLLOWED BY CAP IN MFD. & TOL. IF CRITICAL.

INT. FREQ. 455 KC.



# Electrohome Rhapsody

