


Marconi Model 34 Chassis Layout Alignment & Voltage Chart

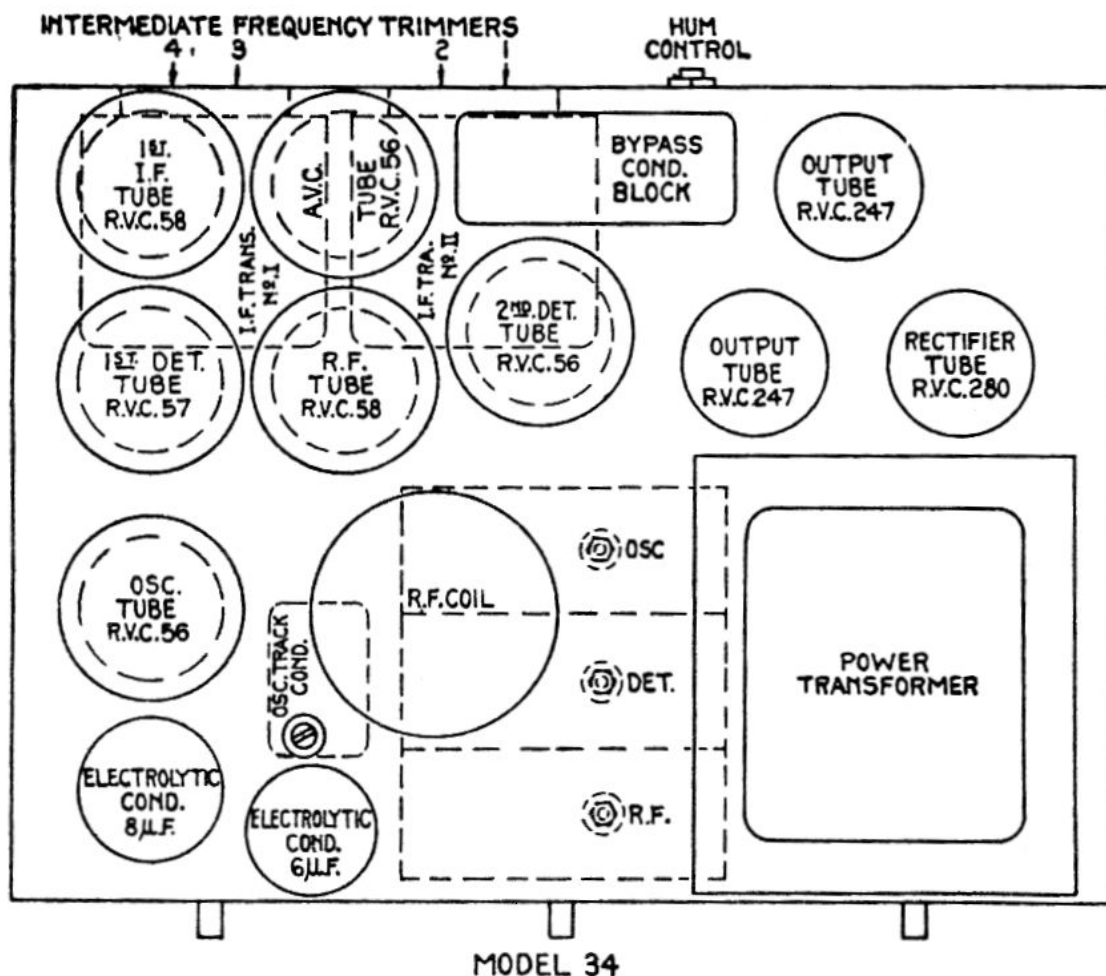

	Voltages to Cathode				Voltages to Chassis	
	Grid	Plate	Screen	Sup.	Cath.	Heater
R.F.	5	245	67	0	4	.1
1st Det....	4	240	58	0	5	.1
Osc.....	0	65	4	0
I.F.	0	240	67	0	4	.1
2nd Det...	12	147	12	0
AVC.....	.5	5	27	27
Power.....	5	240	247

TRIMMER ADJUSTMENT MODEL 34

I.F.—175 K.C. Adjust in order No. 1, No. 2, No. 3, No. 4.
 R.F.—Trim at 1,400 K.C. in order—Osc., Det., and R.F.
 Oscillator Tracking Condenser—Adjust at 600 K.C.