

9	.00025	22	150 and .05
10	.01	11	10,000
13	.05	12	15,000
15	.05 and 150 Ohm resistor	14	25,000
16	.1, .15, .25, 2-5 (50-60 cycles)	15	32,000
21	.05, .15, .25, 2-5 (25-40 cycles)	16	99,000
24	.05	17	160,000
33	(50 to 60 cycles) 6.	18	240,000
34	(25 to 40 cycles) 10.	19	490,000


Tube	Plate Volts	Screen Grid Volts	Control Grid Volts	Cathode Volts	Plate Milli-amperes
1st R.F.	245	90	2.5	3.0	4.5
2nd R.F.	250	90	2.5	3.0	5.5
Det.	100	42	8.0	8.0	0
Output	175*	190*	1.0*	...	2.7*

- I.R.F. **FRONT**
- 2.R.F. ● RECT
- DET ● PWR

1931-32

PHILCO MODELS 50 AND 50-A

Tube	Plate Volts	Screen Grid Volts	Control Grid Volts	Cathode Volts	Plate Milli-amperes
Osc. & 1st Det.	220*	85*	9.0*	9.0*	...
I.F.	210	85	3.0	3.0	6.2
2nd Det.	75	54	5.2	5.2	0
Output	210**	240**	0.2**	...	28,**
Rect.	240/Plate	30/Plate

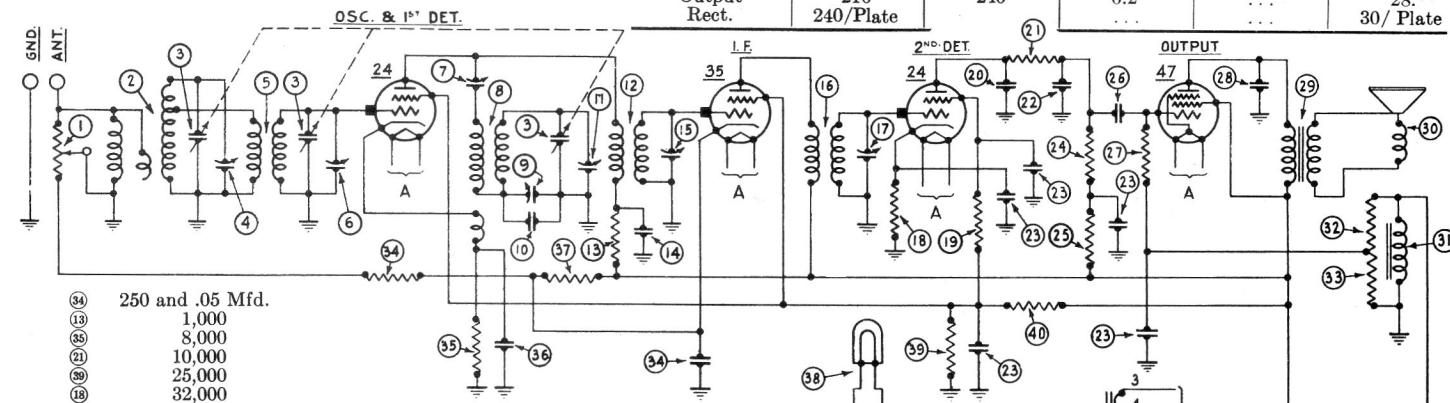

34	250 and .05 Mfd.
13	1,000
15	8,000
16	10,000
17	25,000
18	32,000
19	32,000
20	51,000
21	99,000
22	160,000
23	490,000
24	.00025
25	.00011
26	.01
27	.05
28	.1, .15, .25, 2-5 (50-60 cy.)
29	.2, .15, .25, 2-5 (25-40 cy.)
30	6 (50-60 cycles)
31	10 (25-40 cycles)
32	6

I.F. 175 Kc

- 2.DET
- I.F.
- OSC ● 1.DET
- RECT.
- PWR

PHILCO MODELS 51 - 51-A

1932-33 52 AND 52-A.

Printed in Canada

—Courtesy Philco Products Ltd. of Canada