


MAGNAVOX CHASSIS 70-01-01, 70-01-10, 70-01-20

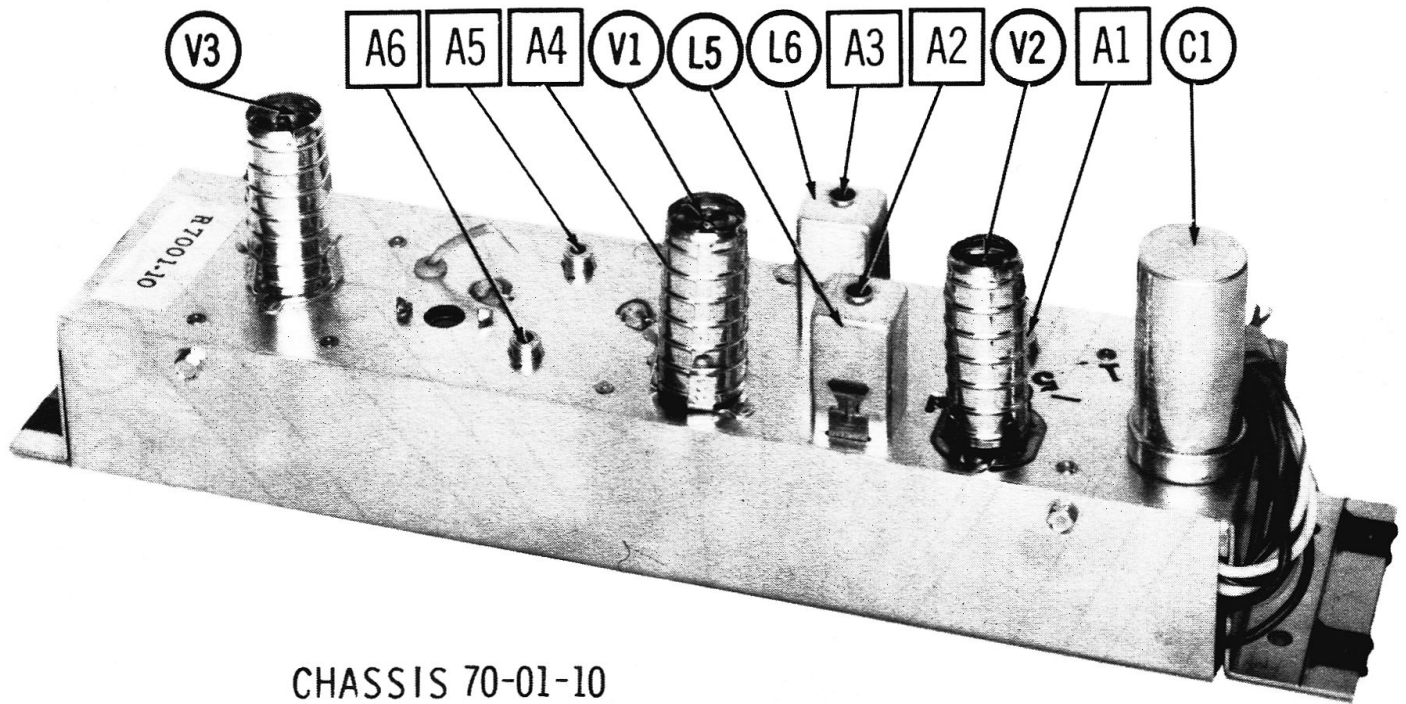

CHASSIS 70-01-10

TRADE NAME	Magnavox Chassis 70-01-00, 70-01-10, 70-01-20
MANUFACTURER	The Magnavox Co., 2131 Bueter Road, Fort Wayne 4, Indiana
TYPE SET	Externally Powered 3 Tube FM Stereo Multiplex Adapter

ALIGNMENT INSTRUCTIONS

Use only enough generator output to provide a usable indication.
Suggested Alignment Tools: ... GENERAL CEMENT 9302, 8282

MULTIPLEX ADAPTER ALIGNMENT USING FM STEREO SIGNAL GENERATOR & AUDIO OSCILLATOR

	SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
1.	19KC to input jack, low side to chassis.	Vert. amp. to pin 6 of V2, low side to chassis.	A1	Adjust for maximum deflection.
2.	"	Vert. amp. to pin 2 of V1, low side to chassis.	A2	Adjust for maximum deflection. Set scope to lock in 2-cycle waveform.
3.	"	Vert. amp. to point A , low side to chassis.	A3	Adjust for maximum deflection of 4-cycle waveform.
4.	67KC to input jack, low side to chassis.	"	A4	Adjust for MINIMUM deflection.
5.	"	"	A5	Adjust for maximum deflection.
6.	18KC to Pin 8 of V1, low side to chassis.	Vert. amp. to point B , low side to chassis.	A6	"