

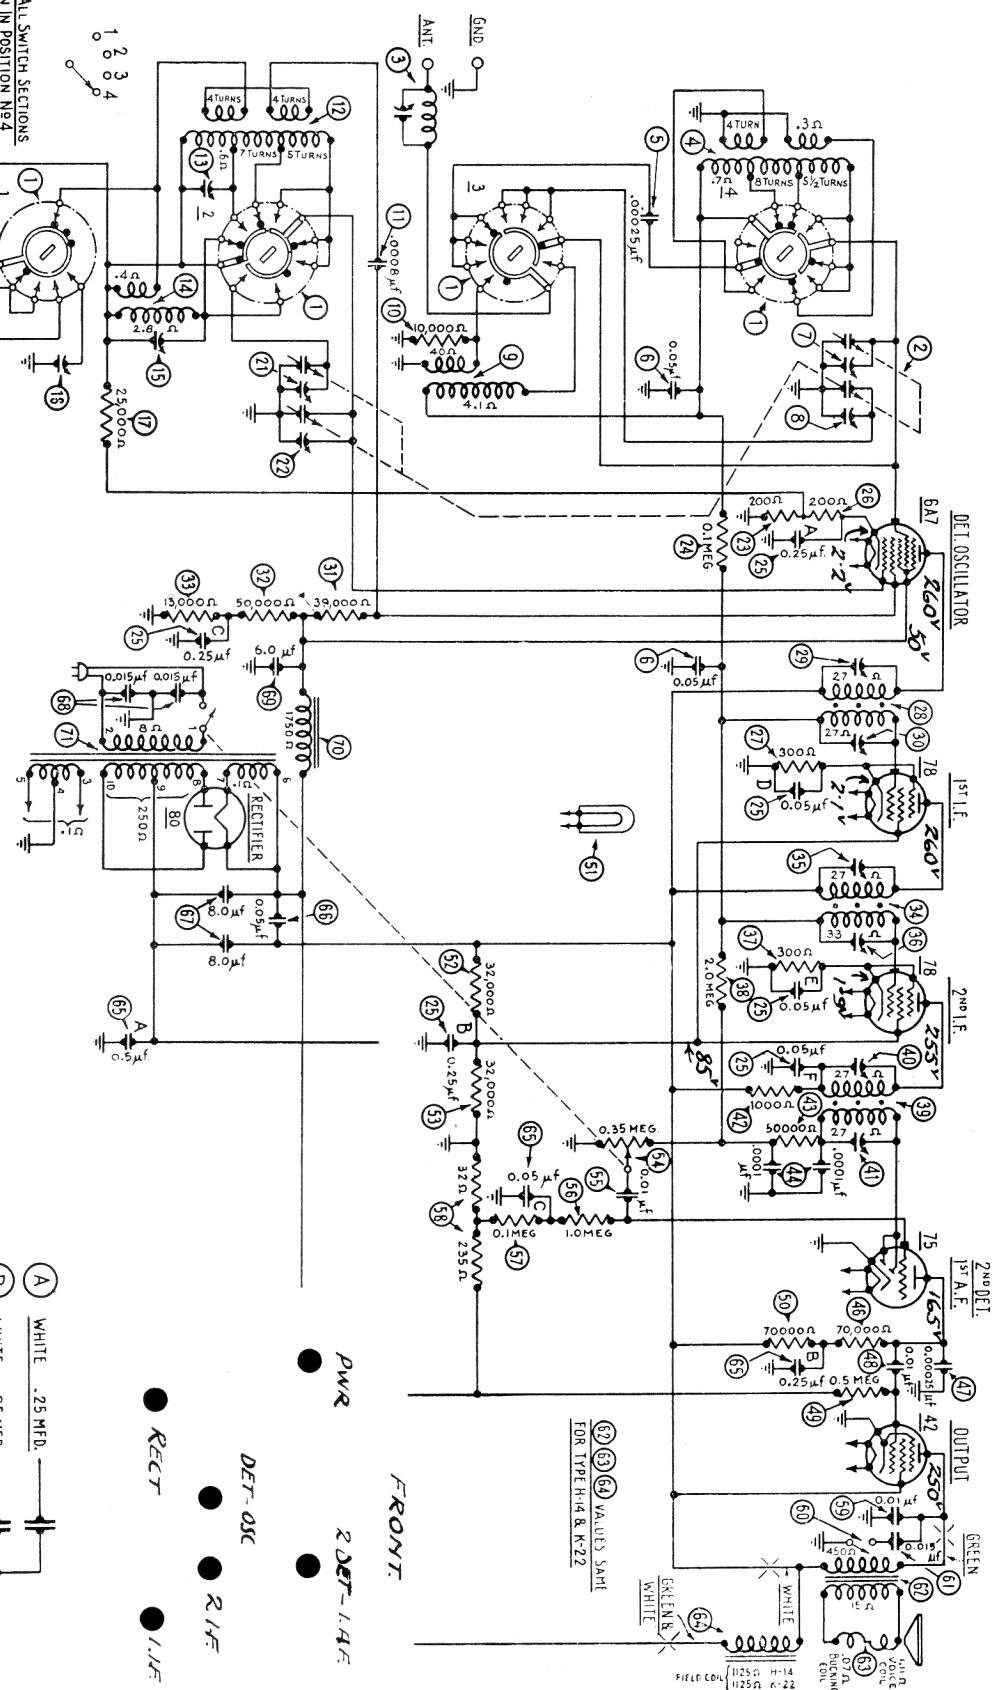
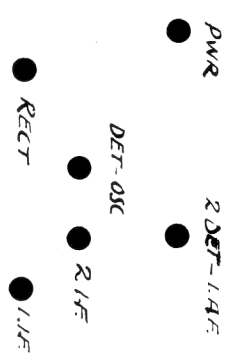


# Model-344 (U.S.A 44) 1933-34 IF 460 K.C.

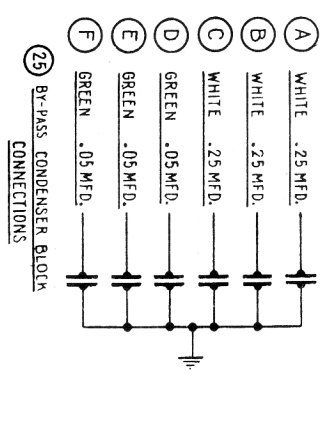

**ADJUSTMENT OF THE DIAL FREQUENCIES—**  
 In the following procedure, the frequency ranges are:  
 Range 1.....520 K.C.—1500 K.C.  
 Range 2.....1.5 M.C.—4.0 M.C.  
 Range 3.....4.0 M.C.—11.0 M.C.  
 Range 4.....11.0 M.C.—23.0 M.C.

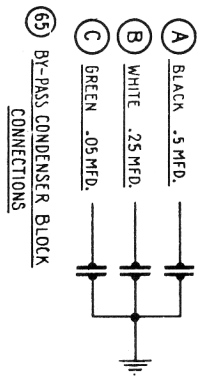

(62) (63) (64) VALUES SAME FOR TYPE H14 & K-22

COURTESY  
**PHILCO-21**

PRODUCTS LTD.

**DATA SHEET**

PRINTED IN CANADA