

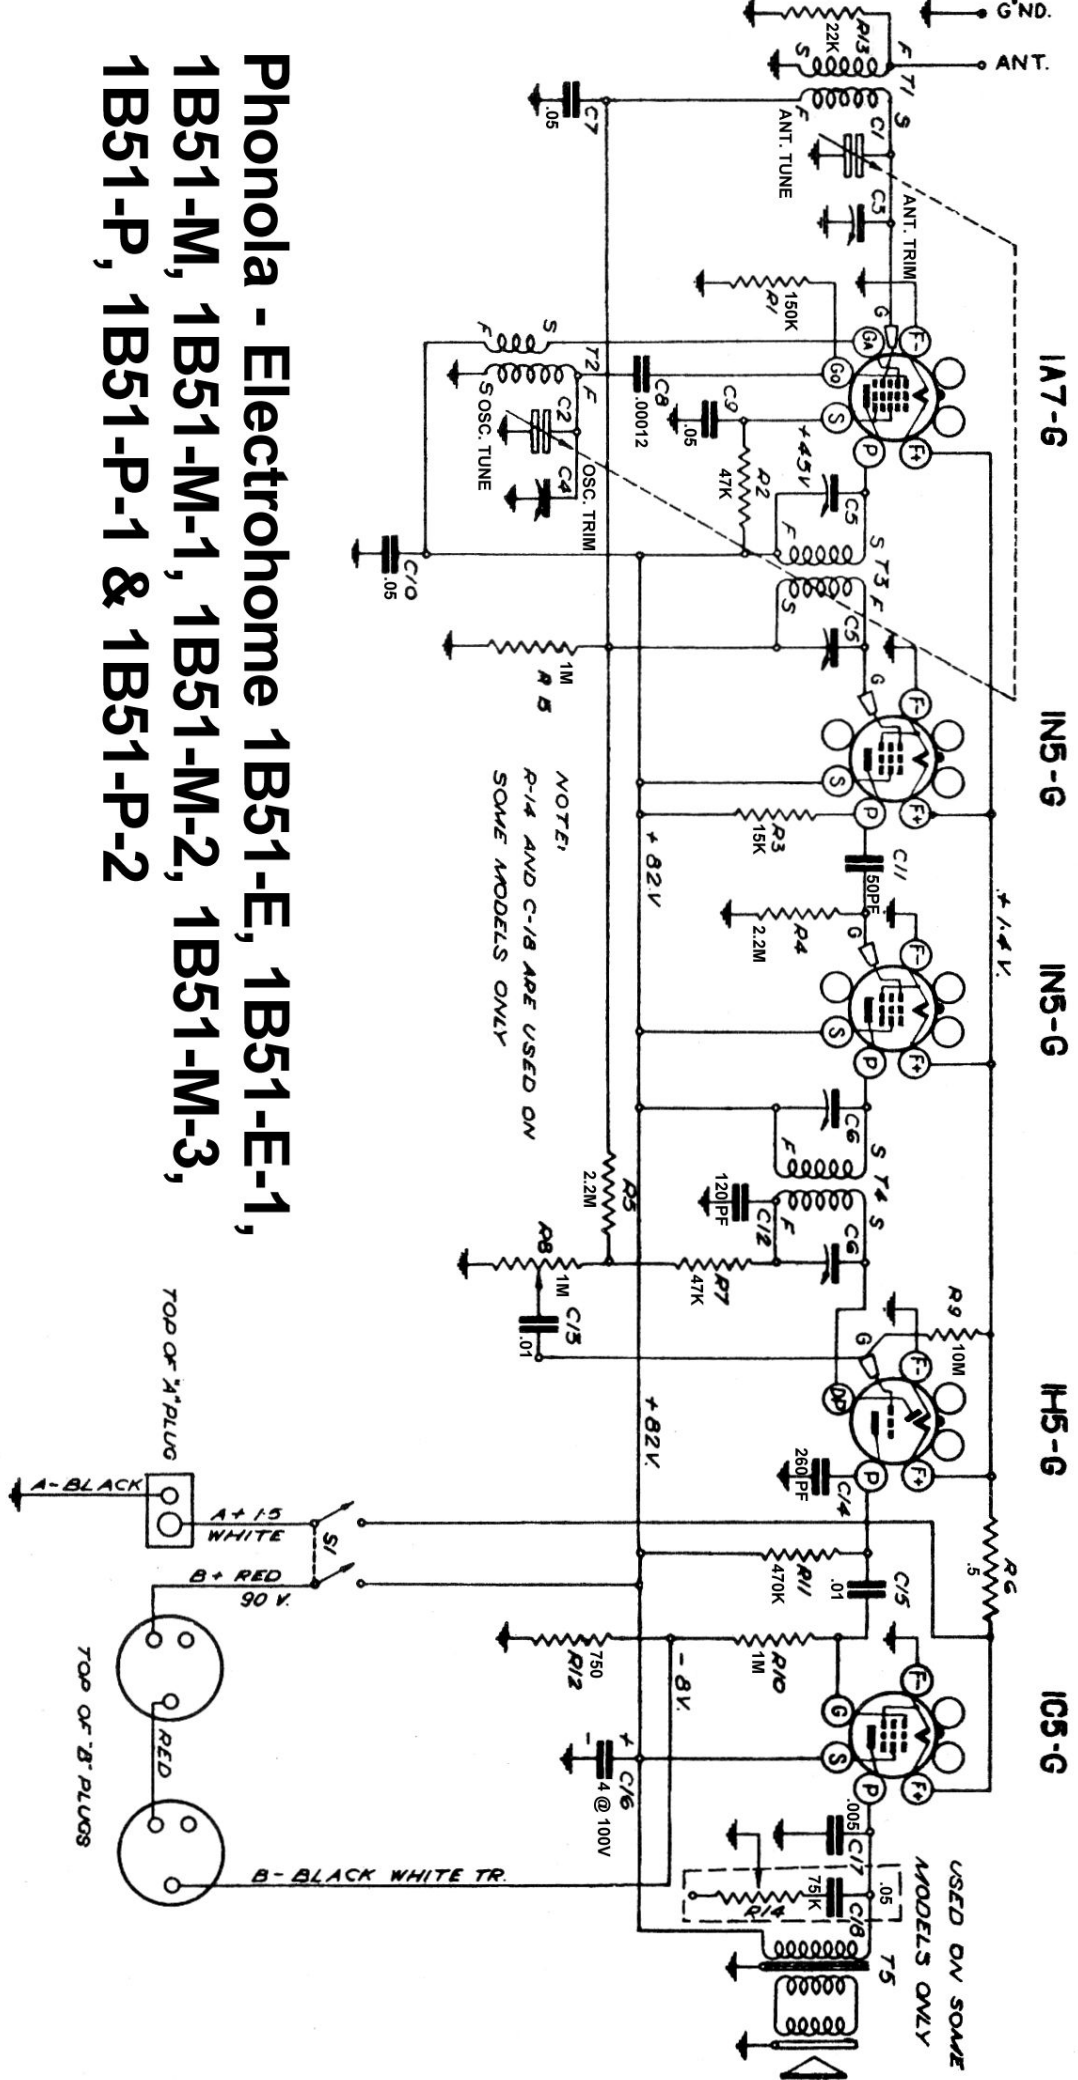
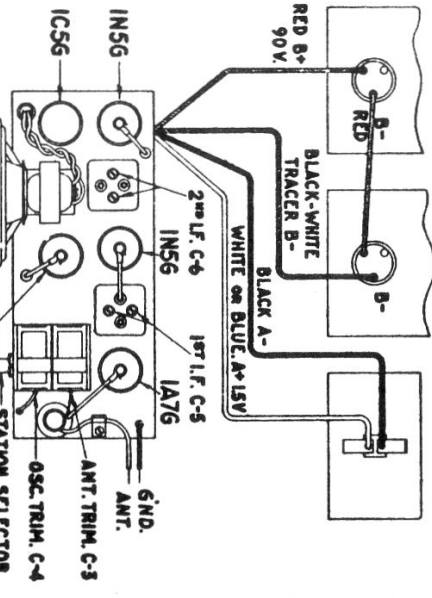
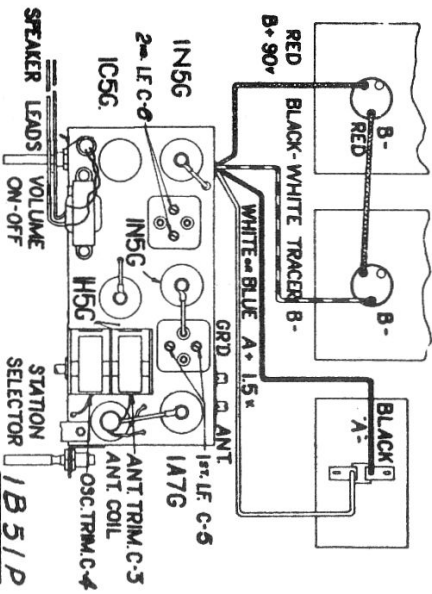
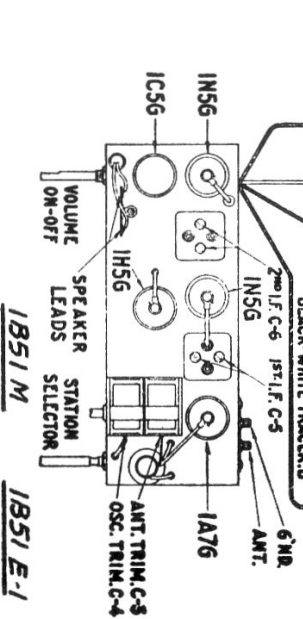
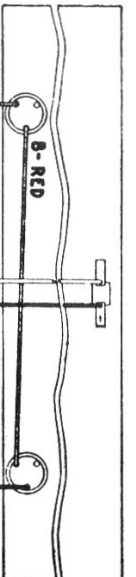


Phonola - Electrohome 1B51-E, 1B51-E-1, 1B51-M, 1B51-M-1, 1B51-M-2, 1B51-M-3, 1B51-P, 1B51-P-1 & 1B51-P-2

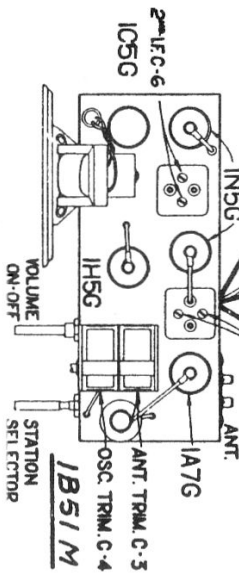

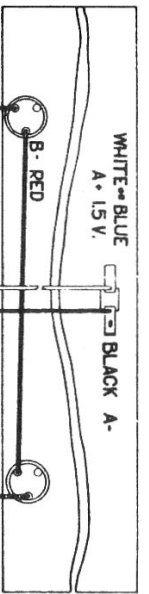

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.		.1 Mfd.	Grid of I.N.5.G. I.F. Tube	1700 K.C.	455 K.C.	2nd I.F. C-6	Maximum Output
1st I.F.		.1 Mfd.	Grid of I.A.7.G. Converter	1700 K.C.	455 K.C.	1st I.F. C-5	Maximum Output
Antenna 1460 K.C.		200 Mfd.	Antenna & Ground Post	1460 K.C.	1460 K.C.	B.C. Osc. C-4 B.C. Ant. C-3	Maximum Output
Oscillator 600 K.C.		200 Mfd.	Antenna & Ground Post	600 K.C.	600 K.C.		

Phonola - Electrohome Battery Operated Radio

- 1B51-E, 1B51-E-1,
- 1B51-M, 1B51-M-1,
- 1B51-M-2, 1B51-M-3,
- 1B51-P, 1B51-P-1
- 1B51-P-2

