



NOTE:  
 C25 AND R17 IS USED ON  
 SOME MODELS ONLY

# Phonola - Electrohme 1B52E, 1B52M, 1B52M1 & 1B52P

NOTE:  
 ALL VOLTAGES MEASURED TO CHASSIS

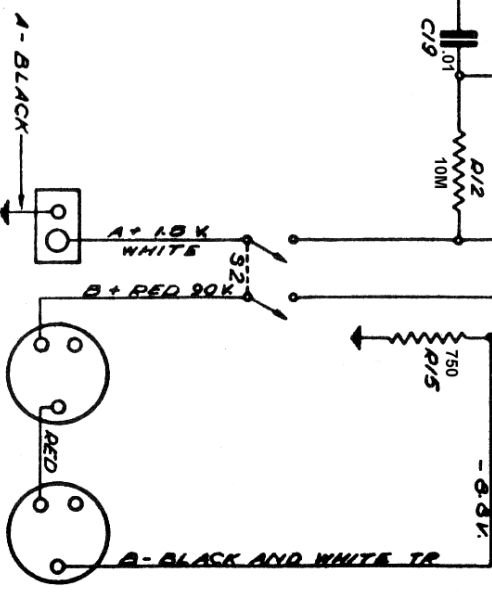

# Phonola - Electrohome 1B52E, 1B52M 1B52M1 & 1B52P

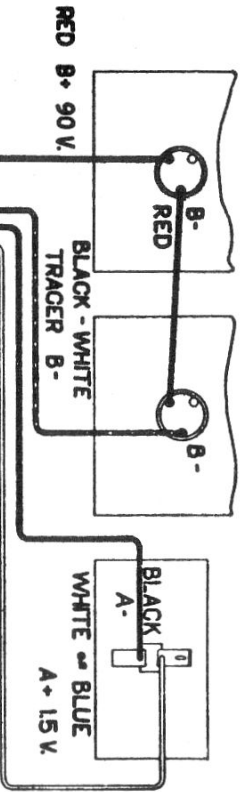

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.	B.C.	.1 Mfd.	Grid of I.N. <sub>2</sub> G. I.F. Tube	1700 K.C.	455 K.C.	2nd I.F. C-10	Maximum Output
1st I.F.	B.C.	.1 Mfd.	Grid of I.B. <sub>7</sub> G. Converter	1700 K.C.	455 K.C.	1st I.F. C-9	Maximum Output
1460 K.C.	B.C.	200 Mmf.	Antenna	1460 K.C.	1460 K.C.	B.C. Osc. C-7 B.C. Ant. C-3	Maximum Output
600 K.C.	B.C.	200 Mmf.	Antenna	600 K.C.	600 K.C.		
15 M.C.	S.W.	400 Ohm	Antenna	15 M.C.	15 M.C.	S.W. Osc. C-8 S.W. Ant. C-4	Maximum Output
6 M.C.	S.W.	400 Ohm	Antenna	6 M.C.	6 M.C.		

