


Phonola - Electrohome 1B62-M-1

RCC - Phonola Data Sheet 161 - 1941-42

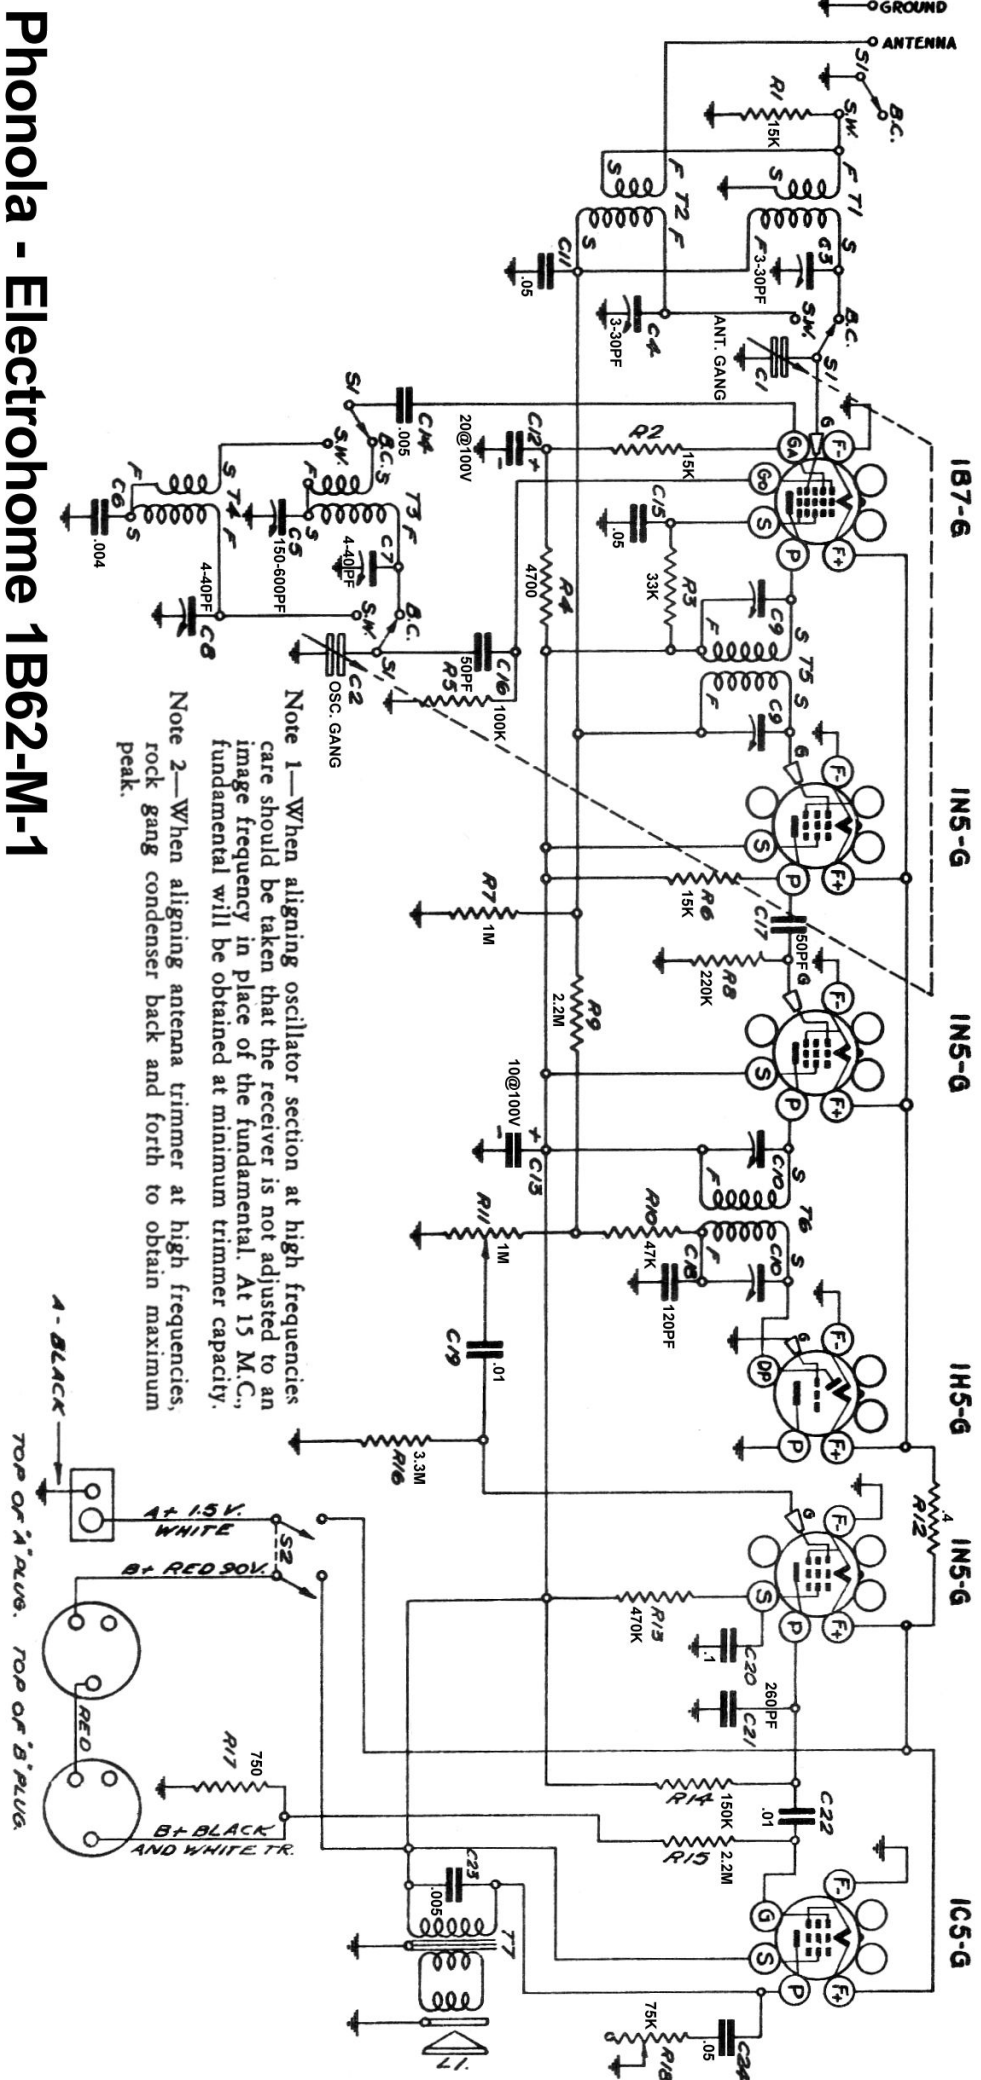

Phonola - Electrohome 1B62-M-1

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note
2nd I.F.	B.C.	.1 Mfd.	Grid of I.N.3, G. I.F. Tube	1650 K.C.	455 K.C.	2nd I.F. C-10	Maximum Output	B+RED 90V.
1st I.F.	B.C.	.1 Mfd.	Grid of I.B.7, G. Converter	1650 K.C.	455 K.C.	1st I.F. C-9	Maximum Output	WHITE or BLUE A+5V. BLACK A-
1460 K.C.	B.C.	75 Mmfd.	Antenna	1460 K.C.	1460 K.C.	B.C. Osc. C-7 B.C. Ant. C-3	Maximum Output	BLACK WHITE TRACER B-
600 K.C.	B.C.	75 Mmfd.	Antenna	600 K.C.	600 K.C.	B.C. Padder C-5	Maximum Output	SPEAKER LEADS
1.7 M.C.	S.W.	250 Ohm	Antenna	1.7 M.C.	1.7 M.C.	S.W. Osc. C-8 S.W. Ant. C-4	Maximum Output	Refer to Note 1
6 M.C.	S.W.	250 Ohm	Antenna	6 M.C.	6 M.C.		Check Only	Refer to Note 1

