Model 280 A.C. Receiver

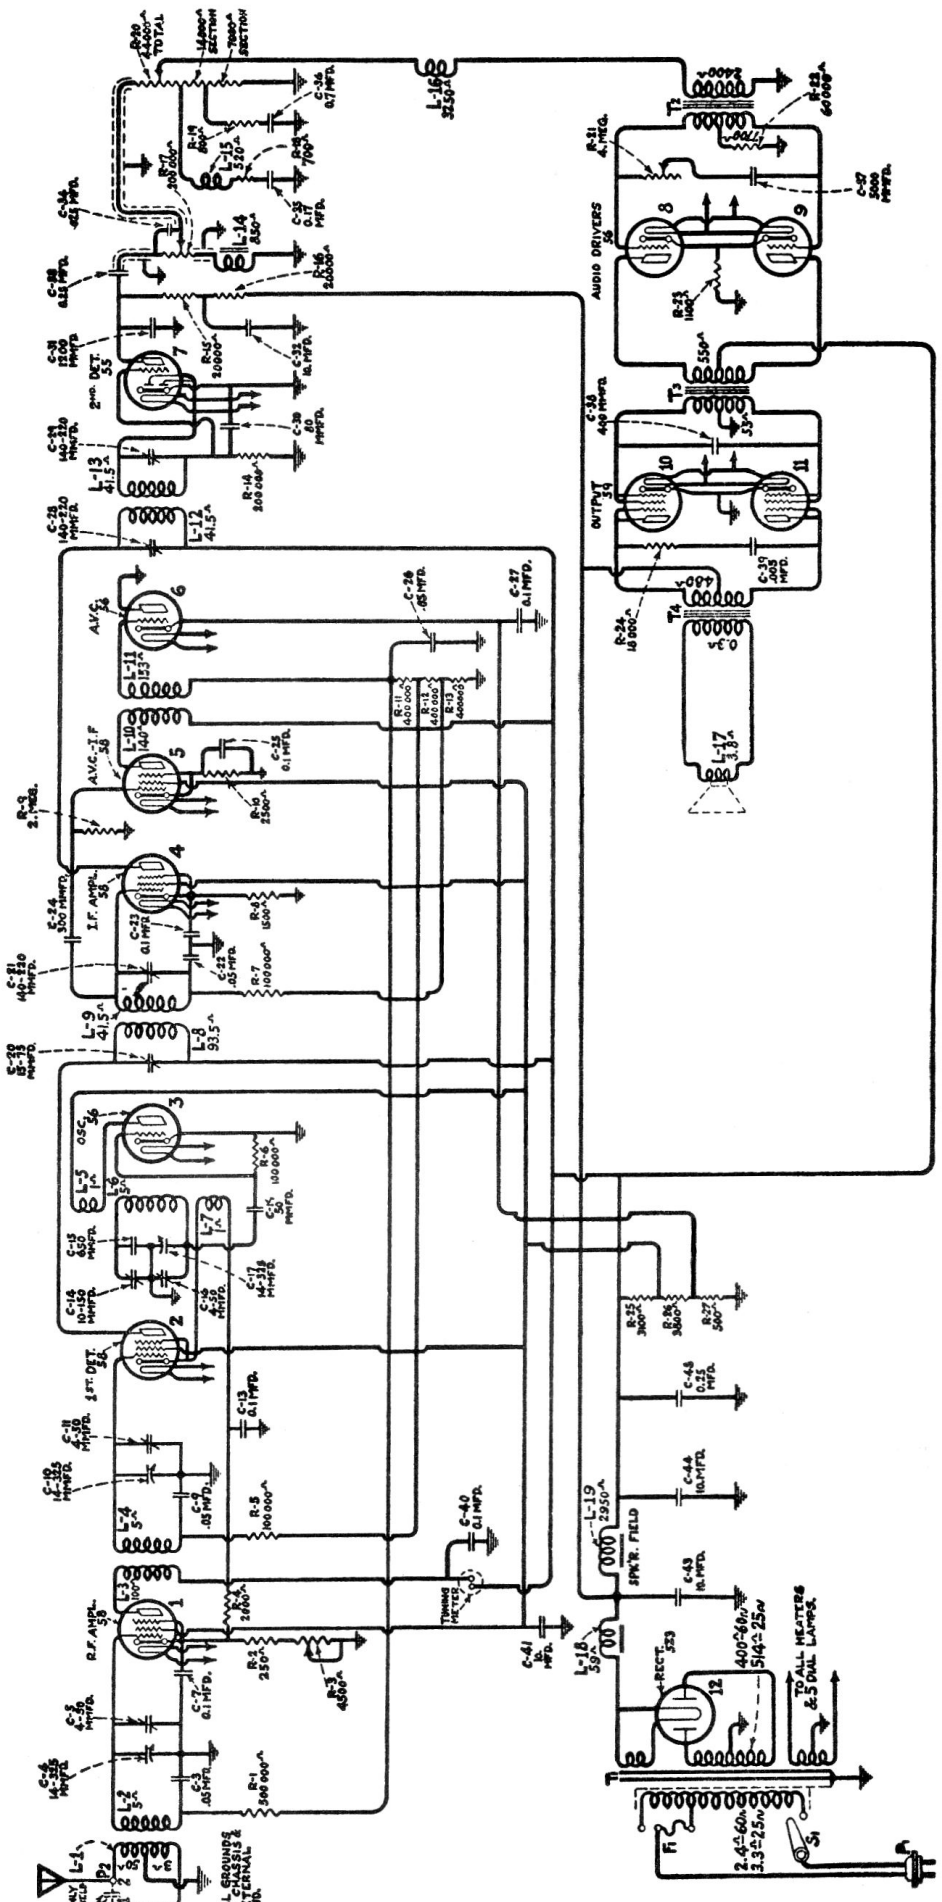

ALIGNMENT PROCEDURE

R.F. & Det. Stages ..... 1400 K.C.
Oscillator Stage ..... 600 K.C., 1400 K.C.
Intermediate Frequency ..... 175 K.C.
Align all stages for maximum peak.