Model 88K A.C. Receiver

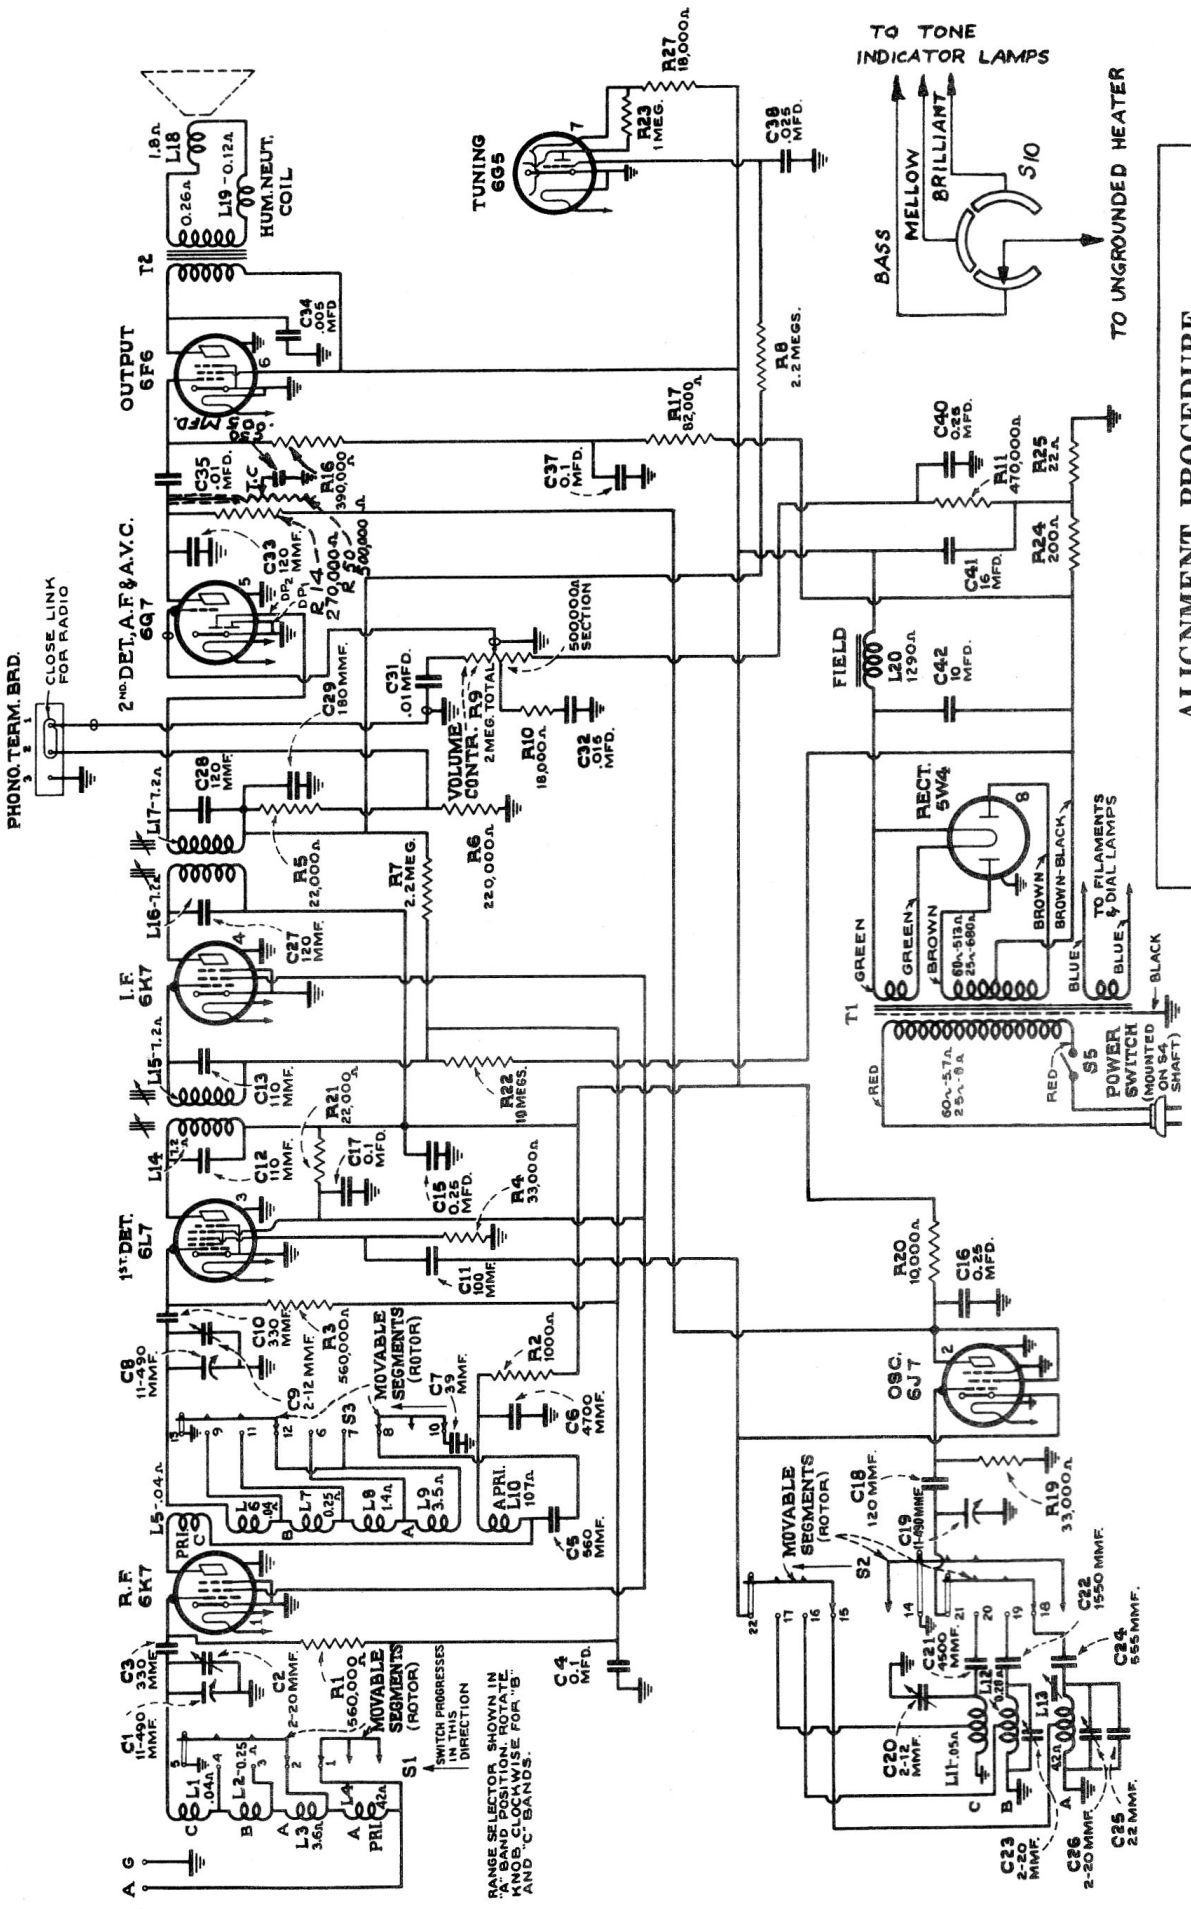

ALIGNMENT PROCEDURE

Oscillator (A) ..... 600 K.C., 1500 K.C.
Oscillator (B) ..... 6,000 K.C.
R.F., Det. & Osc. (C) ..... 20,000 K.C.
Intermediate Frequency ..... 460 K.C.
Peak all stages.

Note:—Alignment of Band (C) R.F. & Det. stages must be accurate as Bands (A & B) R.F. & Det. stages depend solely upon this adjustment.