


# Phonola - Electrohome 951-P & 951-P1

# Alignment & Layout Electrohhome

## 951-P 951-P1

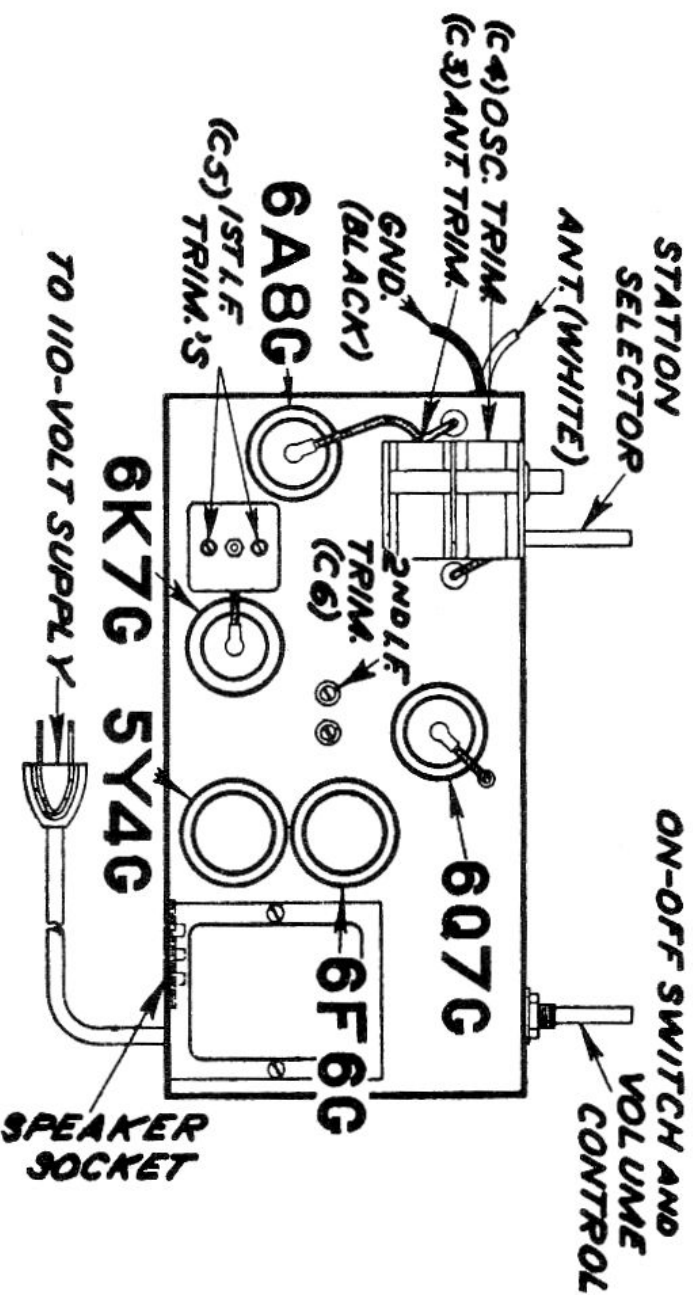

ALIGNMENT ---- PROCEED IN SEQUENCE LISTED

Band	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.	.1 Mfd.	Grid of 6K7G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-6	Maximum Output		4500 Microvolts
1st I. F.	.1 Mfd.	Grid of 6A8G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-5	Maximum Output		230 Microvolts
1460 K. C.	200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-4 B. C. Ant. C-3	Maximum Output		55 Microvolts
600 K. C.	200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	45 Microvolts