Model R-30 Battery Receiver

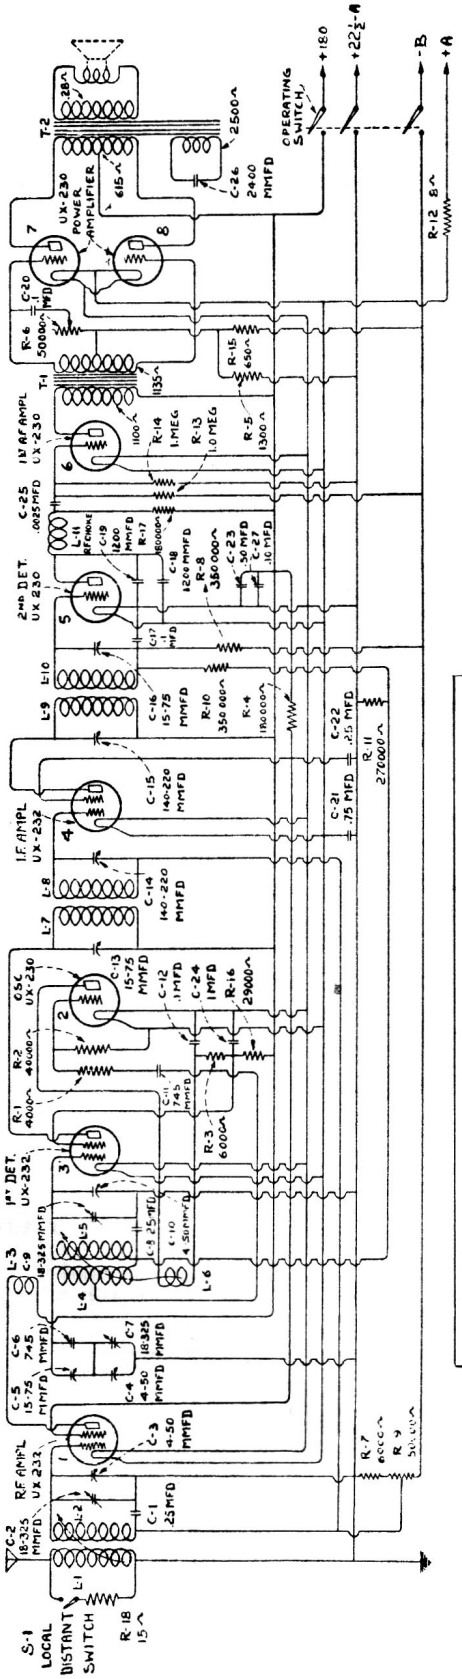

ALIGNMENT PROCEDURE

R.F. & Det. Stages ..... 1400 K.C.
Oscillator Stage ..... 600 K.C., 1400 K.C.
Intermediate Frequency ..... 175 K.C.
Align all stages for maximum peak.