Models R-32, R-34, RE-45, RE-46 A.C. Receivers

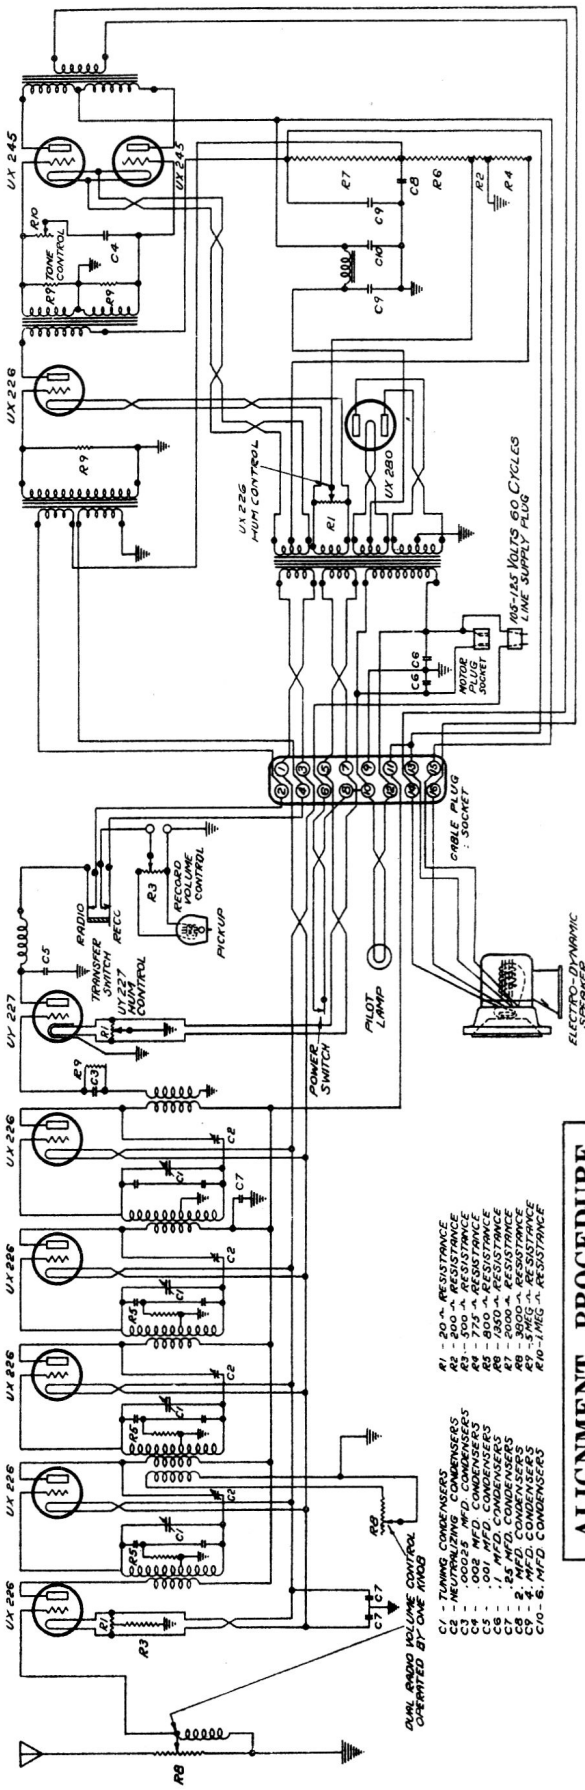

ALIGNMENT PROCEDURE

R.F. stages to be adjusted for max. peak aligning frequencies.

(1) 600 K.C. (3) 1000 K.C.
(2) 800 K.C. (4) 1250 K.C.
(5) 1500 K.C.