



# Electrohome 9B52-S, 9AB52-M & 9AB52-M-1



## ALIGNMENT AND CALIBRATION

These receivers are carefully aligned and calibrated at the factory with precision instruments. If realignment is necessary, the following equipment is required:

- (1) A Signal Generator to supply with accuracy the frequencies:
  - (a) 455 K.C., (b) 1460 K.C., (c) 600 K.C., (d) 15 M.C., (e) 6 M.C.
- (2) A dependable Output Meter.

**Note 1**—When aligning oscillator section at high frequencies, care should be taken that the receiver is not adjusted to an image frequency in place of the fundamental. At 15 M.C. the fundamental will be obtained at minimum trimmer capacity.

**Note 2**—When aligning antenna trimmer at high frequencies, rock gang condenser trimmer back and forth to obtain maximum peak.

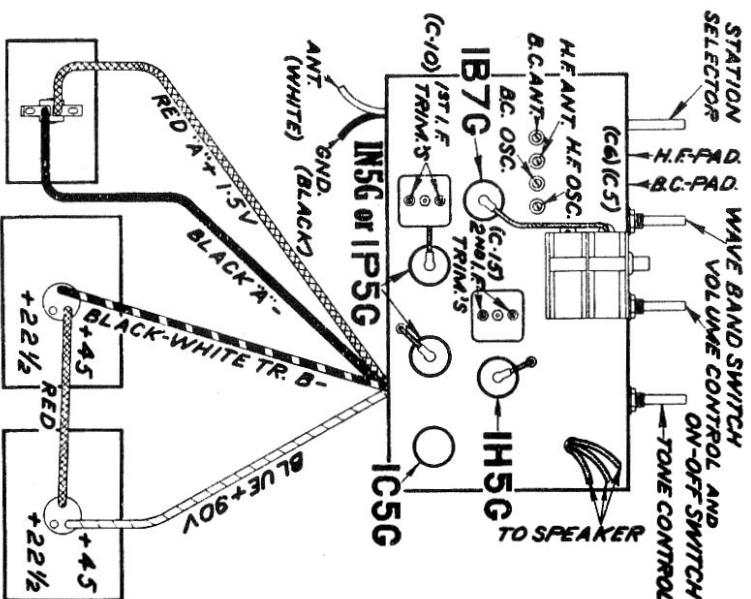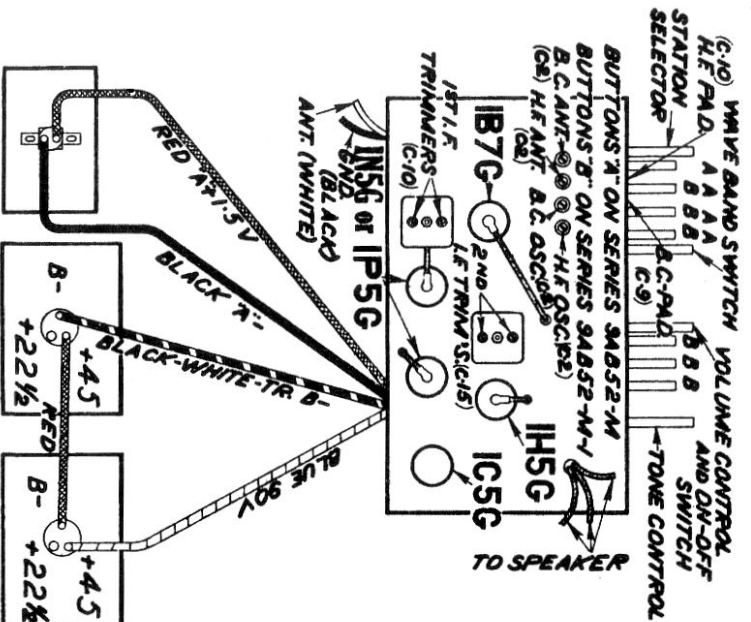

## ALIGNMENT ---- PROCEED IN SEQUENCE LISTED

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note
2nd I. F.	Extreme Left	.1 Mfd.	Grid 1P5G or 1N5G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C15	Maximum Output	
1st I. F.	Extreme Left	.1 Mfd.	Grid 1B7G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C10	Maximum Output	
1460 K. C.	Extreme Left	200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C2 B. C. Ant. C2	Maximum Output	
600 K. C.	Extreme Left	200 Mmfd.	Antenna	600 K. C.	600 K. C.	B. C. Padder C5	Maximum Output	Rock Rotor Back & Forth
15 M. C.	Extreme Right	400 Ohm	Antenna	15 M. C.	15 M. C.	S. W. Osc. C2 S. W. Ant. C3	Maximum Output	Check Image See Note 1
6 M. C.	Extreme Right	400 Ohm	Antenna	6 M. C.	6 M. C.	S. W. Padder C-6	Maximum Output	