


Electrohome 9B61-E & 9B61-E-1 Battery Operated Radio

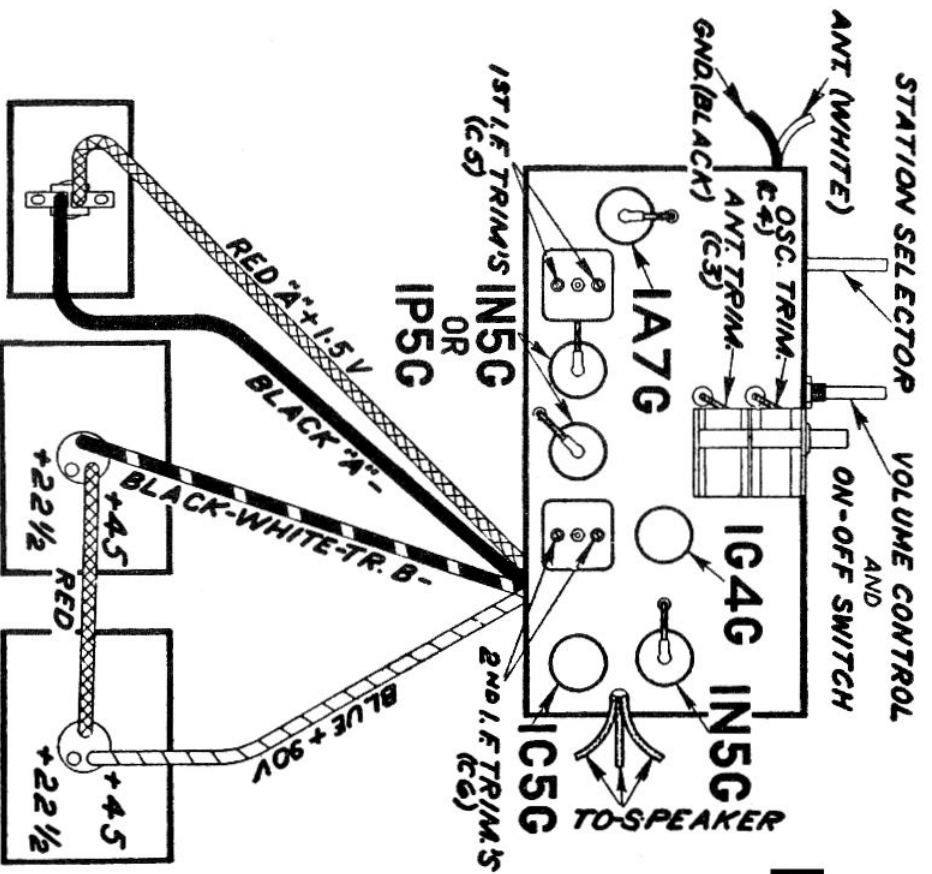

ALIGNMENT ---- PROCEED IN SEQUENCE LISTED

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.		.1 Mfd.	Grid of 1P5G or 1N5G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-6	Maximum Output		3500 Microvolts
1st I. F.		.1 Mfd.	Grid of 1A7G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-5	Maximum Output		160 Microvolts
1460 K. C.		200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-4 B. C. Ant. C-3	Maximum Output		50 Microvolts
600 K. C.		200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	40 Microvolts