Models R-15 & R-16 A.C. Receivers

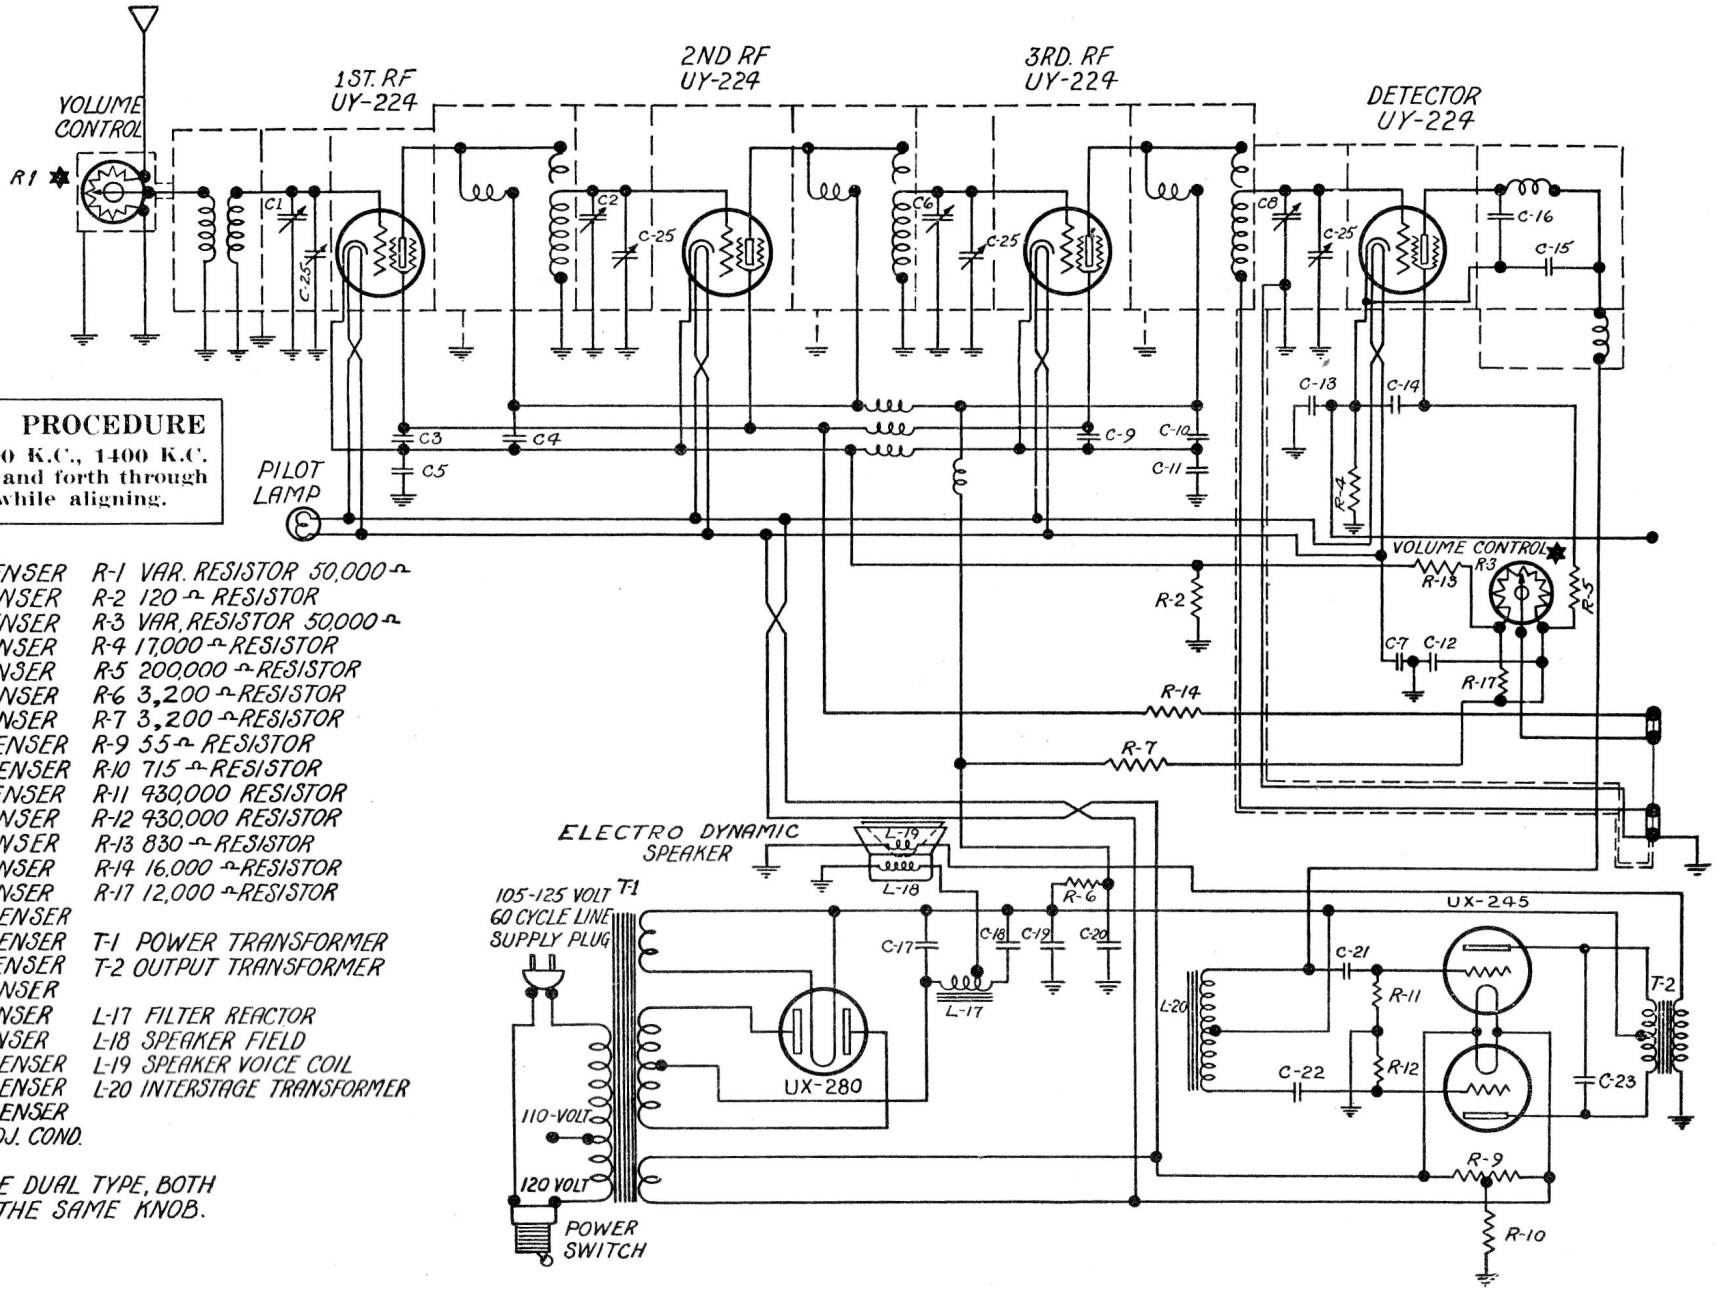

ALIGNMENT PROCEDURE

R.F. Stages. .600 K.C., 1400 K.C. Rock gang back and forth through resonant point while aligning.

C-1 TUNING CONDENSER
C-2 TUNING CONDENSER
C-3 0.1 MFD. CONDENSER
C-4 0.1 MFD. CONDENSER
C-5 0.1 MFD. CONDENSER
C-6 TUNING CONDENSER
C-7 0.1 MFD. CONDENSER
C-8 TUNING CONDENSER
C-9 0.1 MFD. CONDENSER
C-10 0.1 MFD. CONDENSER
C-11 0.1 MFD. CONDENSER
C-12 0.1 MFD. CONDENSER
C-13 .75 MFD. CONDENSER
C-14 .25 MFD. CONDENSER
C-15 320 MMF. CONDENSER
C-16 320 MMF. CONDENSER
C-17 0.1 MFD. CONDENSER
C-18 2.0 MFD. CONDENSER
C-19 1.5 MFD. CONDENSER
C-20 1.0 MFD. CONDENSER
C-21 .025 MFD. CONDENSER
C-22 .025 MFD. CONDENSER
C-23 .005 MFD. CONDENSER
C-25 5 TO 15 MMF. ADJ. COND.

R-1 VAR. RESISTOR 50,000 Ω
R-2 120 Ω RESISTOR
R-3 VAR. RESISTOR 50,000 Ω
R-4 17,000 Ω RESISTOR
R-5 200,000 Ω RESISTOR
R-6 3,200 Ω RESISTOR
R-7 3,200 Ω RESISTOR
R-9 55 Ω RESISTOR
R-10 715 Ω RESISTOR
R-11 930,000 RESISTOR
R-12 930,000 RESISTOR
R-13 830 Ω RESISTOR
R-14 16,000 Ω RESISTOR
R-17 12,000 Ω RESISTOR

T-1 POWER TRANSFORMER
T-2 OUTPUT TRANSFORMER

L-17 FILTER REACTOR
L-18 SPEAKER FIELD
L-19 SPEAKER VOICE COIL
L-20 INTERSTAGE TRANSFORMER

R-1 AND R-3 ARE DUAL TYPE, BOTH OPERATED BY THE SAME KNOB.