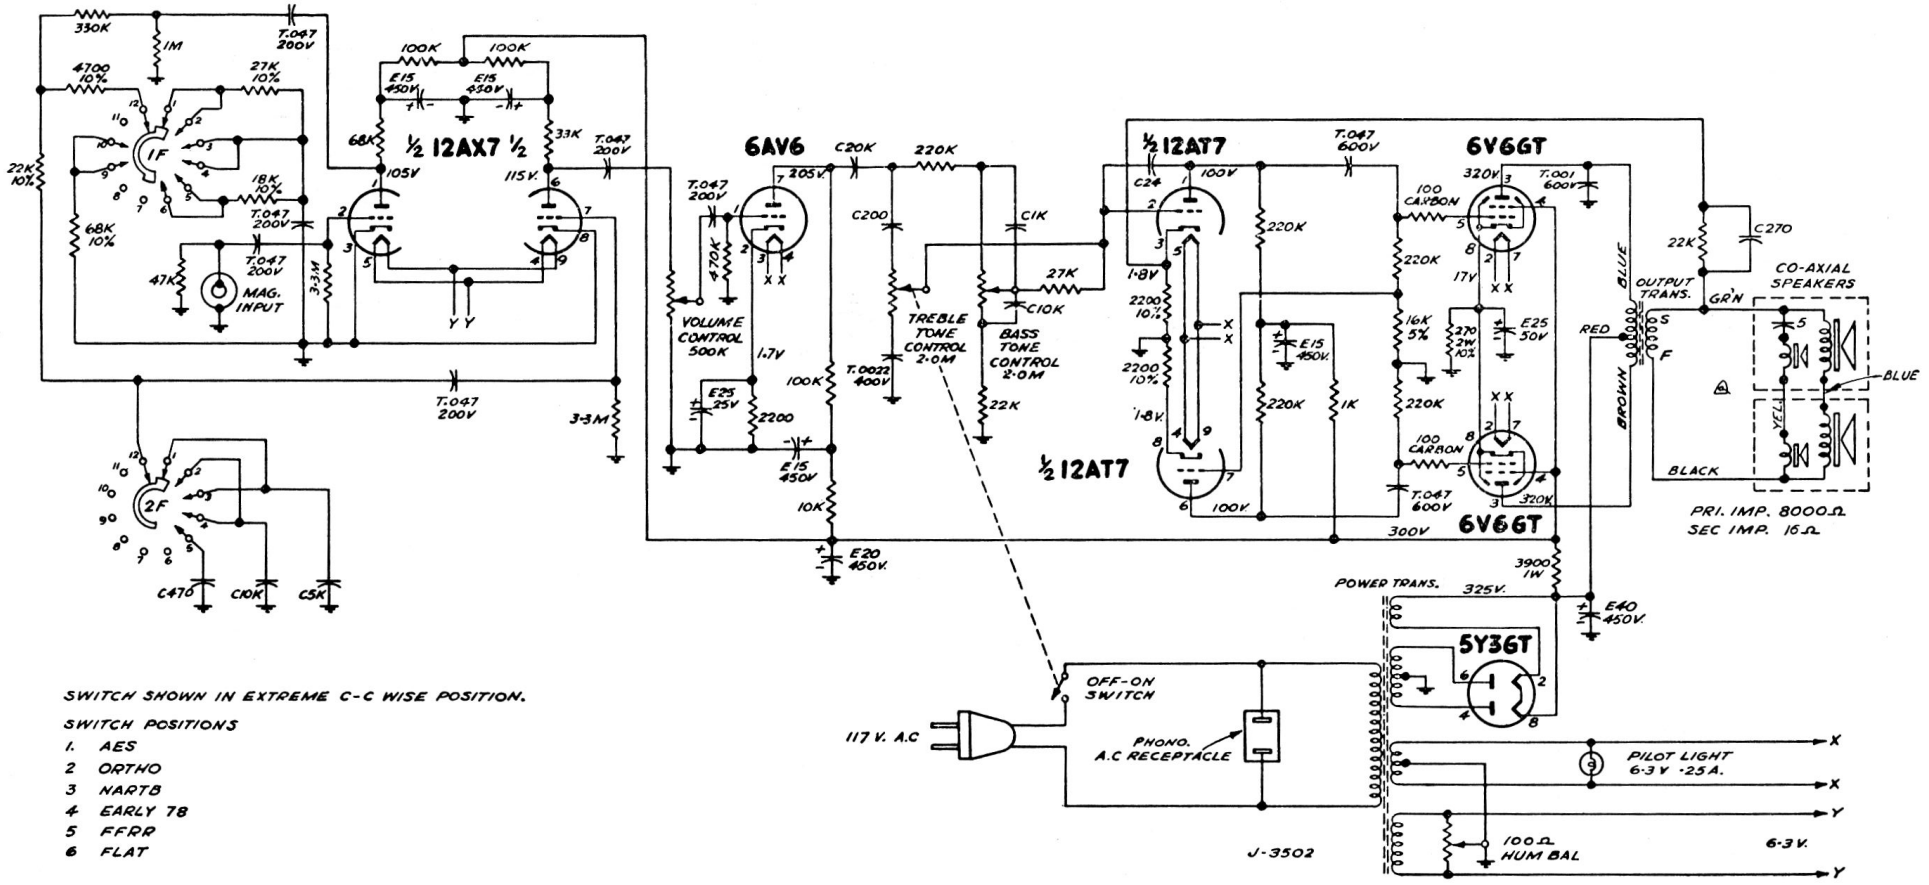

SWITCH SHOWN IN EXTREME C-C WISE POSITION.

SWITCH POSITIONS
1. AES
2 ORTHO
3 NARTB
4 EARLY 78
5 FFRR
6 FLAT

ALL VOLTAGES ±10% MEASURED TO CHASSIS WITH 20,000 OHM/VOLT METER AT 117 V. LINE.

COMPONENT VALUES	C.N.No.	DATE	CHANGE	SYM.	CK.
RESISTORS: HALF WATT, UNLESS OTHERWISE NOTED. 20% TOLERANCE, UNLESS OTHERWISE NOTED. K = 1000 OHMS. M = 1000,000 OHMS.	54-254	8-26-54	SPEAKERS CONNECTIONS CHANGED FROM PARALLEL TO SERIES	a	
CONDENSERS: T=TUBULAR, FOLLOWED BY CAP. IN MFD. AND D.C.W.V. E=ELECTROLYTIC, FOLLOWED BY CAP. IN MFD. & D.C.W.V. C=CERAMIC, FOLLOWED BY CAP. IN MMFD. & TOL. IF CRITICAL.					

VIKING 55-149 PHONOGRAPH