



| CONDENSER VALUES | | RESISTOR VALUES | |
|------------------|----------------|-----------------|----------------------|
| NO | MFD. | NO | OHMS. |
| C1 | .1 - 200V | R1 | 600 - 1/2 W. |
| C2 | .1 - 200V | R2 | 250 } VOLUME CONTROL |
| C3 | .25 - 200V | R3 | 11000 } |
| C4 | .0005 M.I.C.A. | R4 | 30,000 - 1/2 W. |
| C5 | .03 - 200V | R5 | 200,000 - 1/2 W. |
| C6 | .005 - 400V | R6 | 300,000 - 1/2 W. |
| C7 | .1 - 200V | R7 | 130,000 - 1/2 W. |
| C8 | .03 - 200V | R8 | 500,000 - 1/2 W. |
| C9 | .8 - 450V | R9 | 1 MEG - 1/2 W. |
| C10 | .8 - 300V | R10 | 30,000 - 1W. |
| C11 | .1 - 200V | R11 | 10,000 - 1/2 W. |
| C12 | .03 - 200V | R12 | 5000 - 1/2 W. |
| C13 | .05 - 400V | R13 | 50,000 } CONTROL |

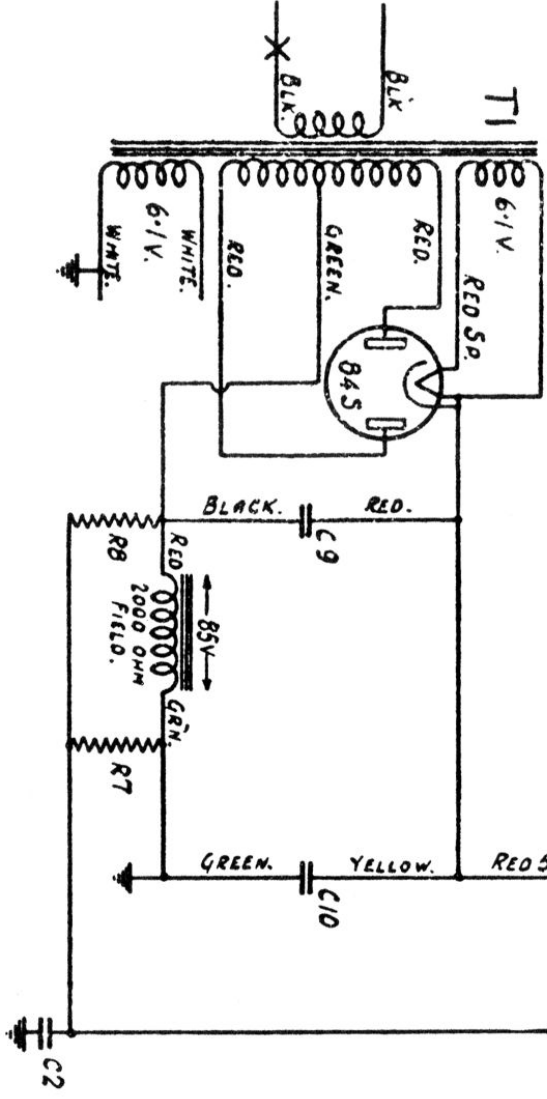

Rogers Model 905 (Chassis 562)

| ITEM | DESCRIPTION | PART NO. | ITEM | DESCRIPTION | PART NO. |
|------|-------------------------|----------|------|------------------------|----------|
| L1 | ANTENNA TRANS. ASSY. | 3728 | C15 | 1ST. I.F. ALIGN. COND. | 3488 |
| L2 | OSCILLATOR TRANS. ASSY. | 3727 | C16 | 1ST. I.F. ALIGN. COND. | 3488 |
| L3 | 1ST. I.F. TRANS. ASSY. | 3745 | C17 | 2ND. I.F. ALIGN. COND. | 3730 |
| L4 | 2ND. I.F. TRANS. ASSY. | 3744 | T1 | POWER TRANS. ASSY. | 3732 |
| L5 | R.F. CHOKE COIL ASSY. | 3551 | T2 | OUTPUT TRANS. ASSY. | 3722 |
| C14 | 2 GANG CONDENSER | 3734 | | T-1 SPEAKER ASSY. | 3739 |

2ND. I.F. ALIGNING COND. - 465 K. C.

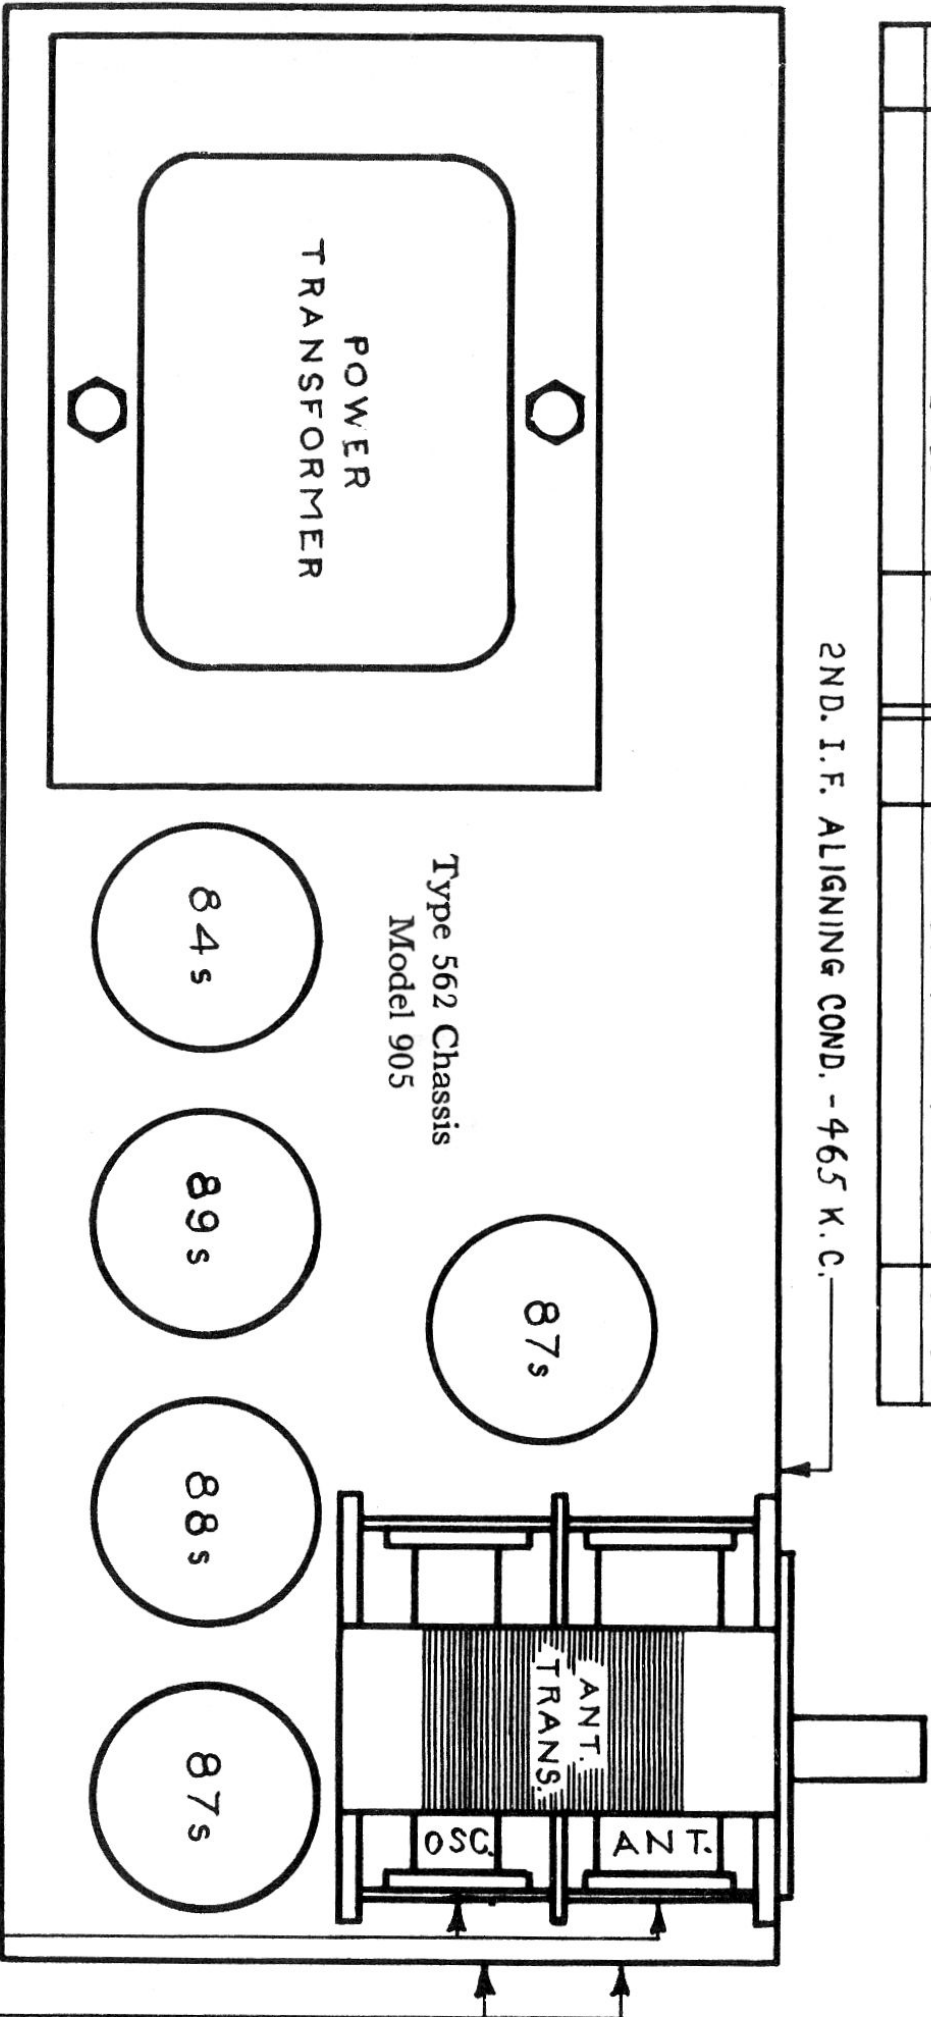

Type 562 Chassis
Model 905

TOP VIEW OF CHASSIS

1400 K.C. ALIGNING
1ST. I.F. ALIGNING COND. - 465 K.C.