
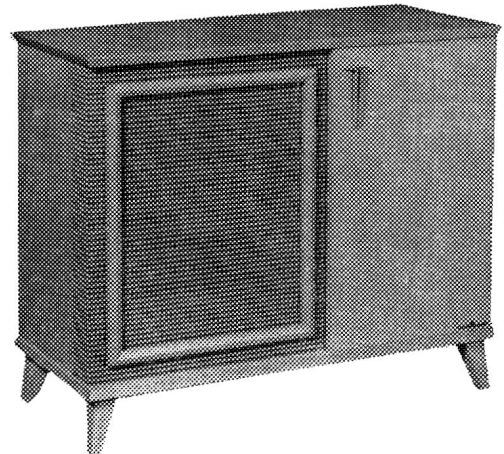


VIKING Service Information for MODEL RC-232

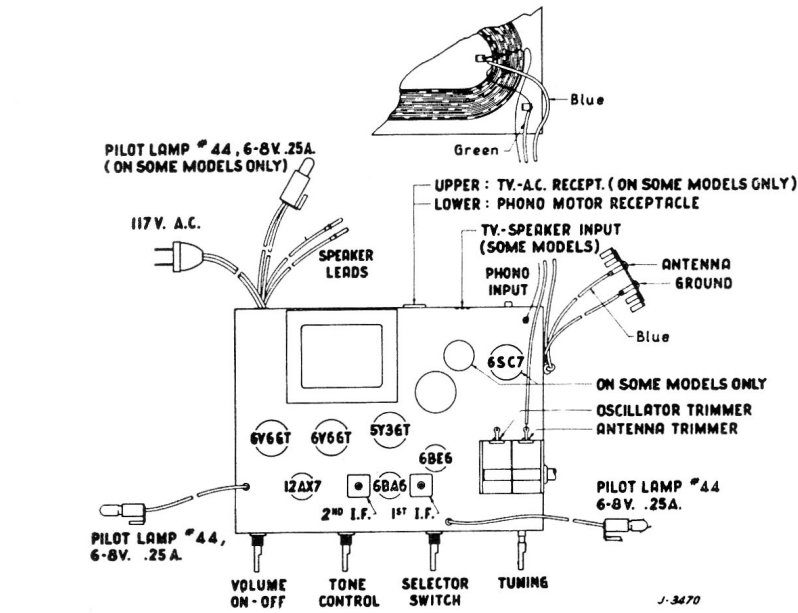


SPECIFICATIONS

Standard Broadcast Range	535 Kc — 1650 Kc
Intermediate Frequency	455 KC.
Power Consumption (Radio Only)	70 Watts
Power Consumption (Radio and Phono)	85 Watts
Undistorted Output	6 Watts
Maximum Power Output	9 Watts

When writing for Service Information or Parts
please quote Model Number
Serial Number and finish of cabinet.

**FOR ALIGNMENT AND SENSITIVITY DATA
SEE SCHEMATIC**

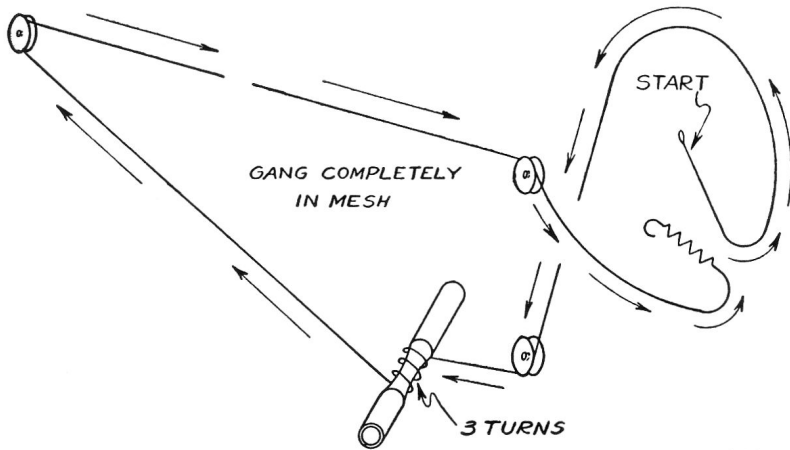

STRINGING DETAIL

FOR Operation on 110-120 Volts A.C. — Cycle as listed on License Plate.

SERVICE REPLACEMENT PARTS LIST

- A-2863.....Glass Dial Scale
- B-4285-3.....Drive Shaft
- G-504.....Dual Electrolytic 40 & 20 ufd at
450 W.V.
- K-771A.....Pilot Lamp No. 44, .25 Amp. 6-8 Volt
- K-875-1.....Phono Socket
- K-923.....AC. Receptacle
- LK-515-2.....Output Transformer
Power Transformer—
60 cycle, LK-453-4
25 cycle, LK-452-4
- MP-1204-46...Pointer & Slider Assy.
- P-2438-1.....BC. Oscillator Coil
- P-2485R.....I.F. Transformer (1st. & 2nd.)
- P-2519.....Loop Ant. Assy.
- Q-299-3.....Selector Switch

- R-339-3.....Volume Control & AC. Switch
- R-371-4.....Tone Control
- V-372-4.....Gang Cond. & Drum Assy.

INSTALLATION

- C-835.....Record Adapter Insert
- K-1639.....Coaxial Speaker
- N-348-3.....Knob (Plastic), Push-on Type
- N-356-2.....Knob (Plastic) Selector Switch

AUTOMATIC RECORD CHANGER

- P-2786-1Webster Model 140, 60 cycle Record
Changer, complete
- P-2787-1Webster Model 140, 25 cycle Record
Changer, complete
- Sonotone No. 9980S Ceramic Cartridge.

THE T. EATON CO. LIMITED
C A N A D A

