


**VIKING RM-463, RM-463R, RMK-464, RM-464R**

ALIGNMENT		AND			SENSITIVITY		
SIGNAL GEN		MODULATED 30 %			400 CYCLES		
STEP	APPLY SIGNAL KC	TO	THRU SERIES DUMMY	SET GANG	ADJUST FOR MAX	SENSITIVITY FOR 50mw.	SENSITIVITY FOR 100mv DIODE LOAD
1	455	12BA6 #1	.05	MIN. CAP	2nd I.F	750 uv	2000uv
2	455	12BE6 #7	.05	MIN CAP.	1st I.F	26 uv	68uv
3	1400	ANT.	RADIATED	1400	OSC.TRIM	—	—
4	1400	ANT	RADIATED	1400	ANT.TRIM	150 uv/m	260 uv /m
5	535	ANT.	RADIATED	MAX CAP	CHECK	—	—
6	600	ANT.	RADIATED	600	CHECK	—	—
7	1650	ANT	RADIATED	1650	CHECK	—	—

## CALIBRATION POINTS ON CHASSIS

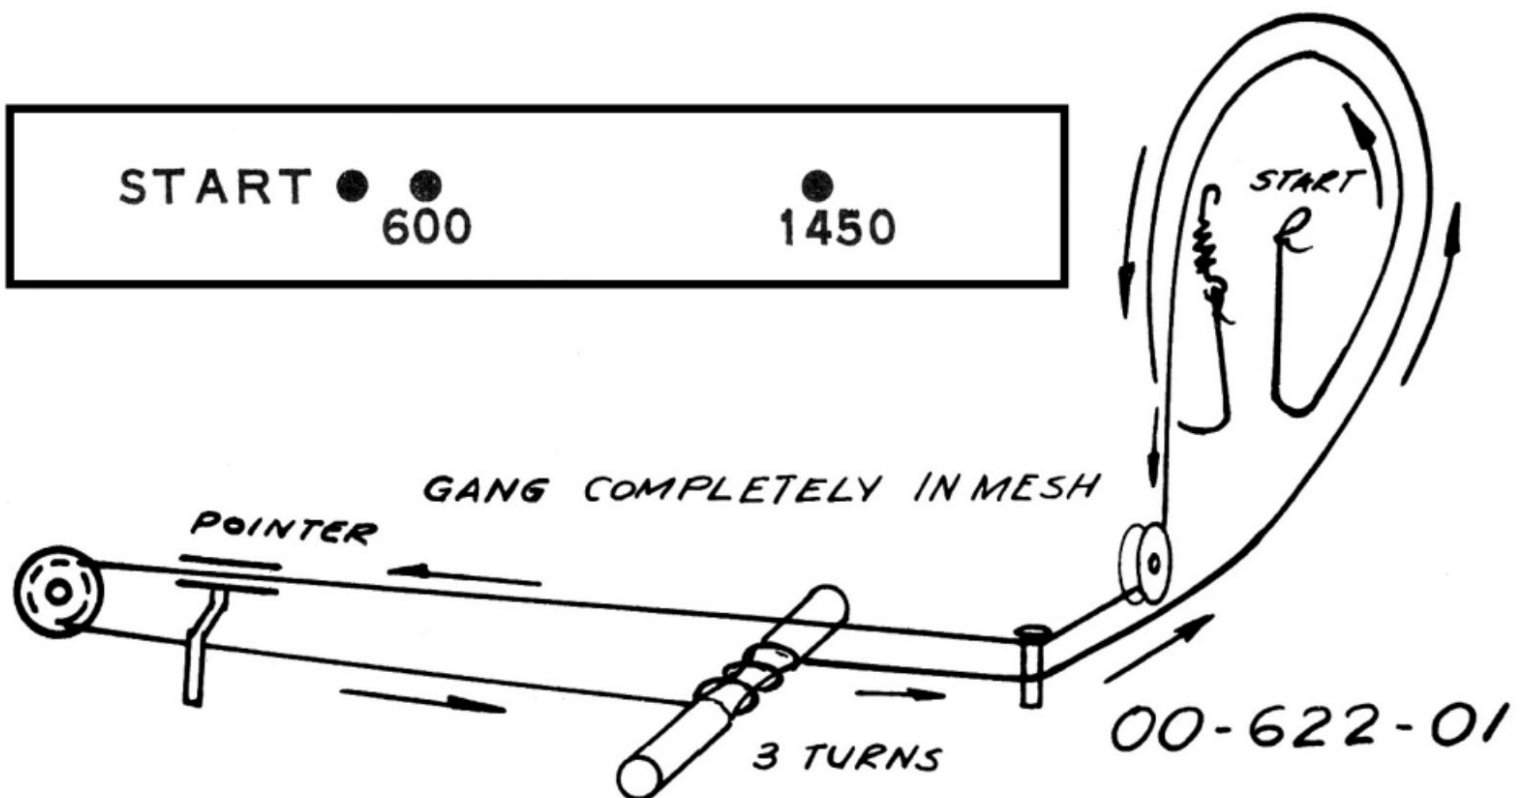

VIKING RM-463, RM-463R, RMK-464, RM-464R