

LEGEND.

- C1. '25 m/d.
- C2, C3, C7 '1
- C4 '018
- C5 '0001
- C6 1"
- C8 '02
- C9 '03
- C10, C11 - 8"
- C13 '001
- R1 5500 Ω
- R2 120
- R3 615
- R4 5000
- R5 5140
- R6 3080


**"Musette" Model ---
Type 403 Chassis**

- R 7 550,000 Ω
- R 8 35,000
- R 9 250,000
- R 10 400,000
- R 11 900,000
- R 12 800,000
- R 13 1 MEG

1931-32

POSITION	PLATE VOLTS	GRID VOLTS	SCREEN V	Ma.
RF	175-180	2-8	85-90	4-4.5
DET	45-50	.5	24-25	.25
PWR	245-250	1.5*		30-32.

* ACTUALLY 45

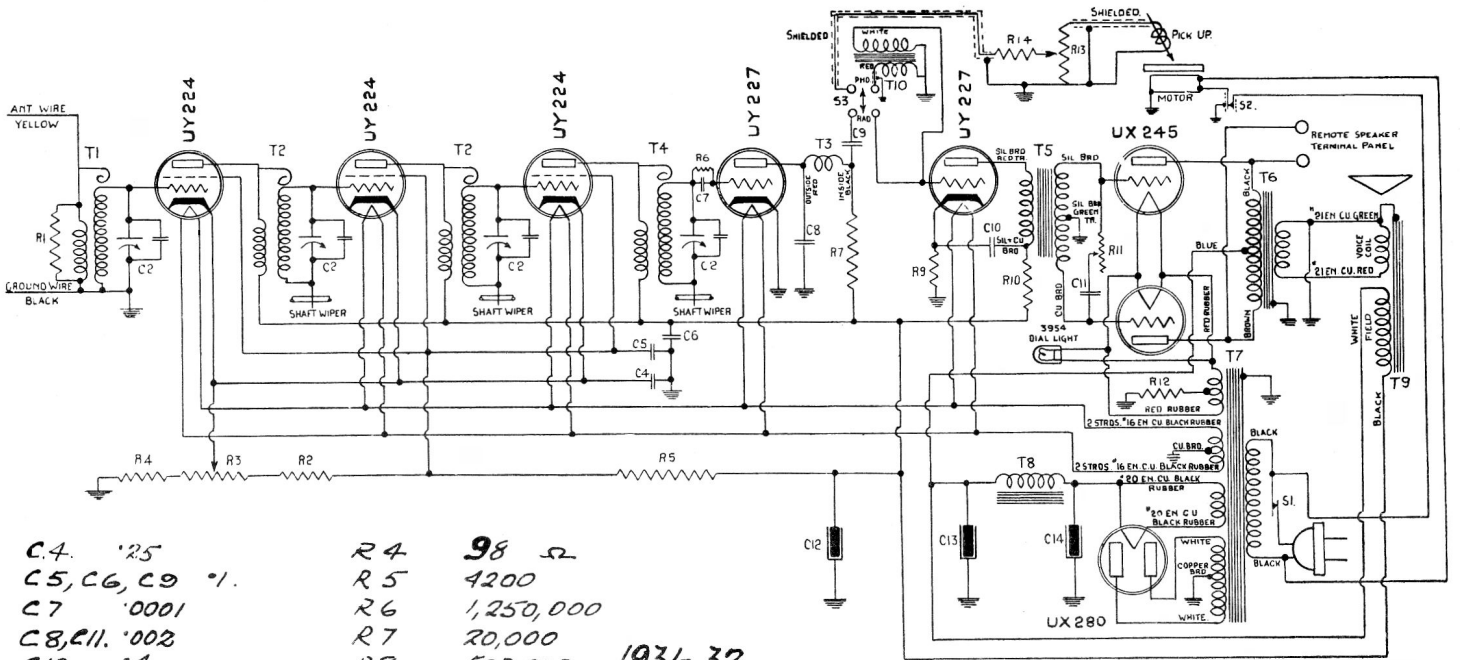

- C4. '25
- C5, C6, C9 '1.
- C7 '0001
- C8, C11. '002
- C10 '4
- C12, C13, C14. 8"
- R1 7000 Ω
- R2 4640
- R3 500


- R4 98 Ω
- R5 4200
- R6 1,250,000
- R7 20,000
- R8 500,000
- R9 1250
- R10 18000
- R11 1.5 MEG
- R12 835

1931-32

POSITION	PLATE VOLTS	GRID VOLTS	SCREEN V	PLATE Ma.
RF	175-180	3-3.2 ϕ	90-95	4-4.5
DET	60-62			5-6
1-AUD	90-95	.5 *		4-5
2-AUD	245-250	46-48		28-30

ϕ VARIES WITH SETTING OF VOL. CONTROL
* ACTUALLY 5 VOLTS

"Operetta" Model --- Type 743 Chassis

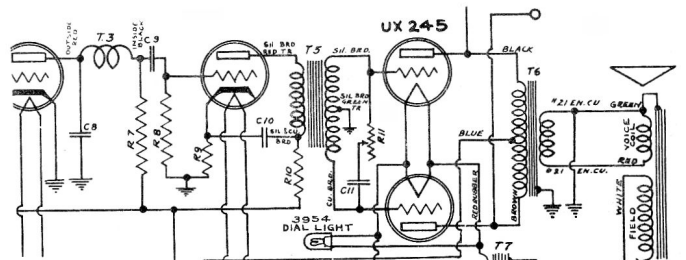

"Rondo" Model --- Type 742 Chassis