


I.F. 455 K.C.

NOTE: ALL VOLTAGES MEASURED FROM TUBE SOCKET TO CHASSIS, WITH 1000 Ω PER VOLT METER, ON HIGHEST READABLE RANGE.

No.	Dummy Antenna	Connection of Signal Gen. to Receiver	Signal Gen. Frequency	Receiver Dial Setting	Trimmers to be Adjusted	Description of Adjustment
1	.1 mfd cond.	6A8G grid cap	455 kc	Anywhere that does not affect the signal	2nd I. F. 1st I. F.	Peak both transformers for maximum output, then repeat until no further increase in output can be obtained.
2	.1 mfd cond.	6A8G grid cap	1500 kc	1500 kc	Oscillator trimmer on front section of gang.	Adjust to bring in signal.
3	200 mmf. cond.	Antenna	1500 kc	1500 kc	Antenna trimmer on rear section of gang.	Adjust for maximum output

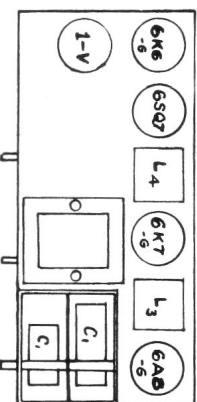

MODEL
498
1941-42