


NOTE: ALL VOLTAGES MEASURED FROM TUBE SOCKET TO GROUND (CHASSIS) WITH METER OF 1000 OHMS PER VOLT, ON HIGHEST READABLE RANGE.

I.F. 455 K.C.

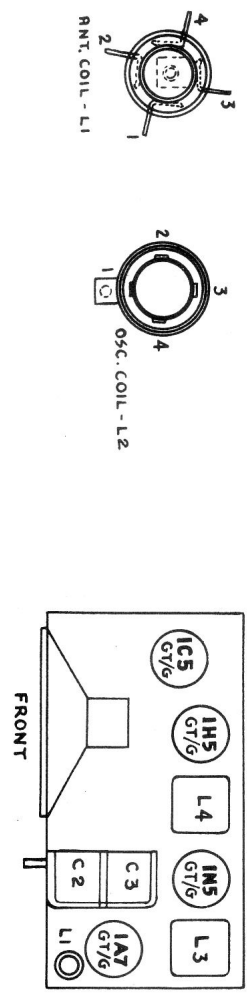

NOTE: A 200 mmf. condenser may be used in place of a standard dummy antenna.

No.	Dummy Antenna	Sig. Gen. to Revr.	Sig. Gen. Freq.	Re'vr. Dial Setting	Trimmers to be adjusted	Description of Alignment
1.	.1 mfd. Cond.	1A7GT Grid Cap	455 K.C.	Anywhere that does not affect signal.	1st I.F. (L3) 2nd I.F. (L4)	Peak both transformers for maximum output, then repeat until no further increase in output can be obtained.
2.	Standard Dummy Antenna	Blue Antenna Wire	1500 K.C.	1500 K.C.	Osc. Trimmer on rear of gang "C3"	Adjust to bring in signal.
3.	Standard Dummy Antenna	Blue Antenna Wire	1500 K.C.	Tune in Signal	Antenna Trimmer on front of gang "C2".	Adjust for maximum output.

MODEL
516

1946-47