



TEMPLE MODELS 10-20-30 1930-31

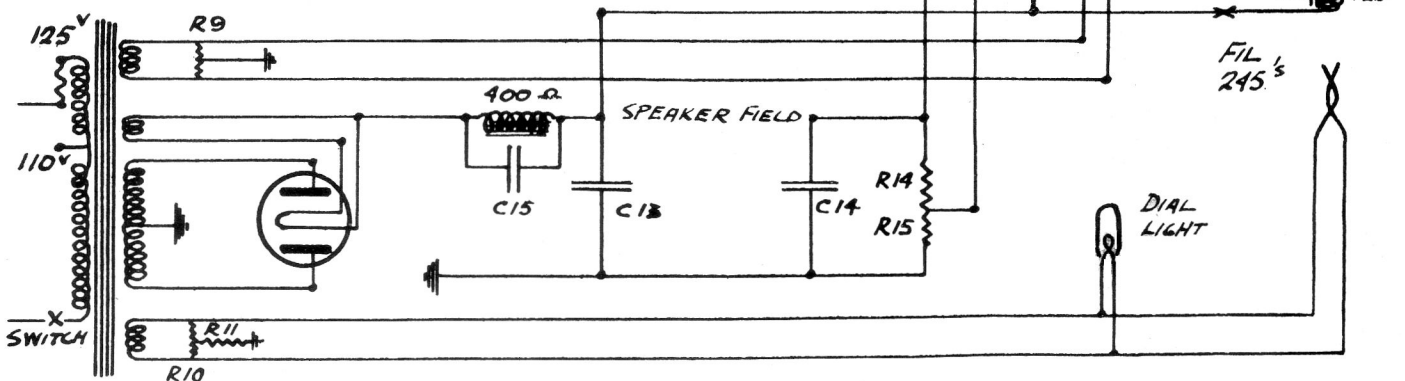

POSITION OF TUBE	TYPE OF TUBE	A VOLTS	B VOLTS	C VOLTS (CONTROL GRID)	CATHODE-HEATER VOLTS	NORMAL PLATE M.A.	SCREEN GRID VOLTS
1RF	224	2.2	160	-3		1.3	75
2"	"	"	"	"		"	"
3"	"	"	"	"		"	"
DETC	"	"	34	-2.5		.01	37.5
1AF	227	"	115	-7		3.9	
P.P.	245	2.25	192	-36		20	
LINE	117V		TAP. 125			VOLUME	MAX.

- OHMS
- R.1. 600
 - R.2. 3-4 43000
 - R.5. 100000
 - R.6. 250000
 - R.7. 2 MΩ
 - R.8. 2000
 - R.9-10 20
 - R.11 900
 - R.12-13 25000
 - R.14 2700
 - R.15 2300

- MFD
- C.5-6-9-10 .25
 - C.7-12 .05
 - C.8. .00025
 - C.10 .5
 - C.11 .15
 - C.13-14 8.5
 - * C.15 .5
- * 25 CYCLE ONLY

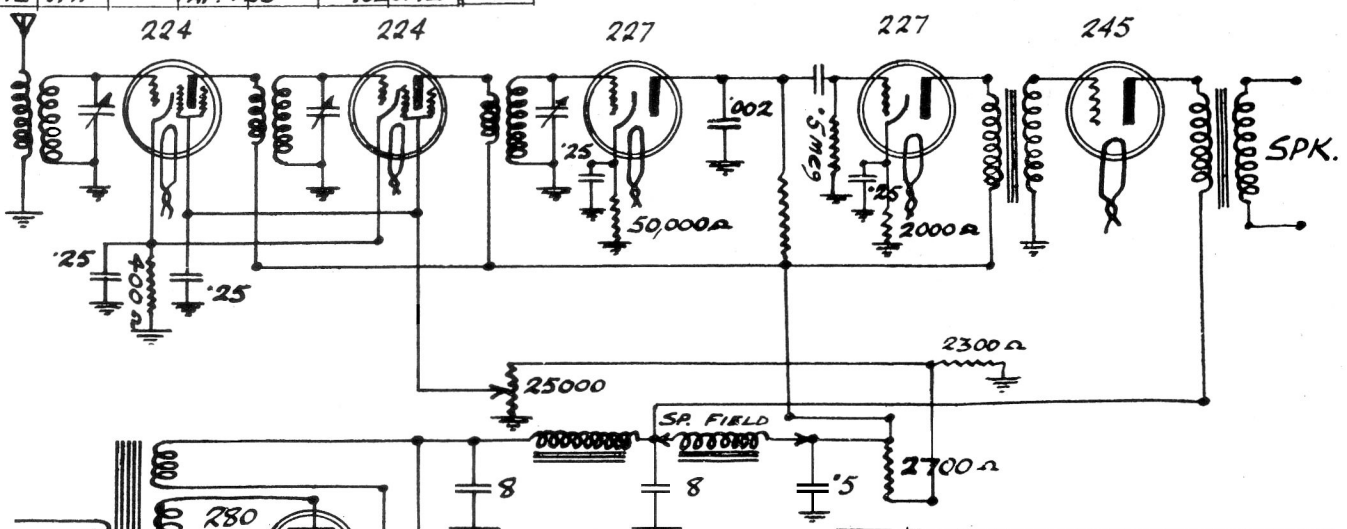

POSITION OF TUBE	TYPE OF TUBE	A VOLTS	B VOLTS	C VOLTS (CONTROL GRID)	CATHODE-HEATER VOLTS	NORMAL PLATE M.A.	SCREEN GRID VOLTS
1RF	224	2.45	160	2.3	3	3	68
2RF	224	"	"	"	3	3	68
DETC	227	"	80	10	10	.25	
1AF	"	"	150	2	10	5	
2AF	245	"	230	42		28	
LINE	116V						VOLUME MAX.

245. FIL. AND DIAL LIGHT.
224, 227 FIL.