


Phonola - Electrohome 1B62M

RCC - Phonola Data Sheet 179 - 1B62M - 1946-47

Phonola - Electrohome 1B62M Battery Operated Radio

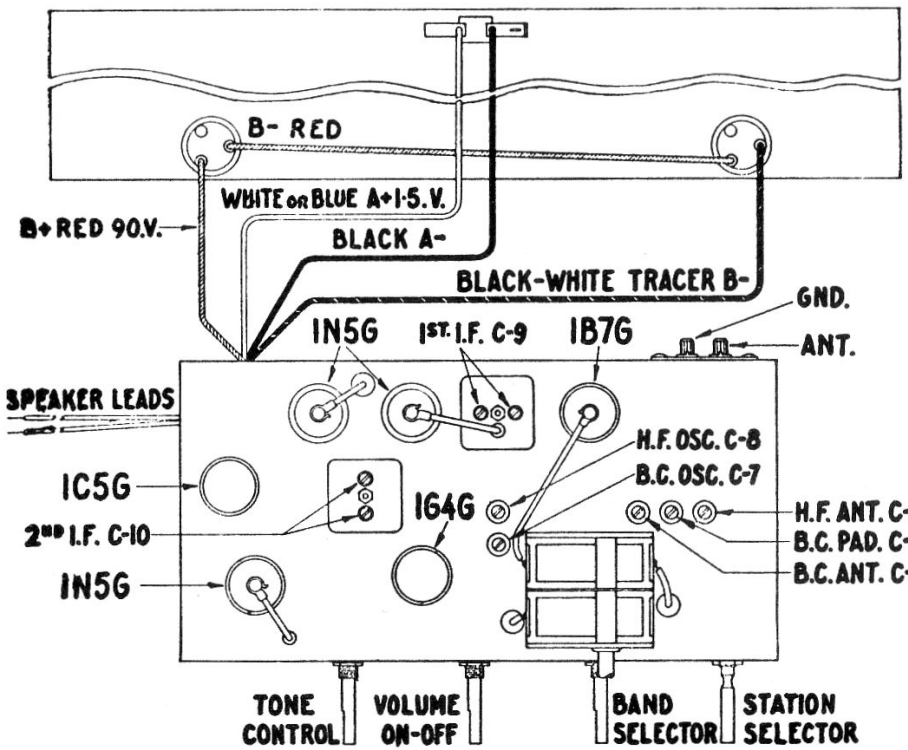

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Timmer Adjusted	Adjustment
2nd I.F.	B.C.	.1 Mfd.	Grid of I.N.5.G. I.F. Tube	1700 K.C.	455 K.C.	2nd I.F. C-10	Maximum Output
1st I.F.	B.C.	.1 Mfd.	Grid of I.B.7.G. Converter	1700 K.C.	455 K.C.	1st I.F. C-9	Maximum Output
1460 K.C.	B.C.	200 Mmf.	Antenna	1460 K.C.	1460 K.C.	B.C. Osc. C-7 B.C. Ant. C-3	Maximum Output
600 K.C.	B.C.	200 Mmf.	Antenna	600 K.C.	600 K.C.	B.C. Padder C-5	Maximum Output
15 M.C.	S.W.	400 Ohm	Antenna	15 M.C.	15 M.C.	S.W. Osc. C-8 S.W. Ant. C-4	Maximum Output
6 M.C.	S.W.	400 Ohm	Antenna	6 M.C.	6 M.C.		