

● INDICATES CONTACTS CONNECTED THROUGH SWITCH ON S2

# Phonola - Electrohome 1UB061-P AC/DC & Battery Operated Radio

RCC - Phonola Data Sheet 160 - 1941-42

# Electrohome 1UB061-P AC/DC & Battery Operated Radio


## ALIGNMENT AND CALIBRATION

These receivers are carefully aligned and calibrated at the factory with precision instruments. If realignment is necessary, the following equipment is required:

- (1) A Signal Generator to supply with accuracy the frequencies:
  - (a) 455 K.C., (b) 1460 K.C., (c) 600 K.C.,
- (2) A dependable Output Meter.

### ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.	B.C.	.1 Mfd.	Grid of I.N.5.G. I.F. Tube	1550 K.C.	455 K.C.	2nd I.F. C-7	Maximum Output
1st I.F.	B.C.	.1 Mfd.	Grid of 1.A.7.G. Converter	1550 K.C.	455 K.C.	1st I.F. C-6	Maximum Output
1460 K.C.	B.C.	100 mmf.	Antenna	1460 K.C.	1460 K.C.	B.C. Osc. Trim. C-5 B.C. Ant. Trim. C3, C4	Maximum Output
600 K.C.	B.C.	100 mmf.	Antenna	600 K.C.	600 K.C.	Check Only	Check Only

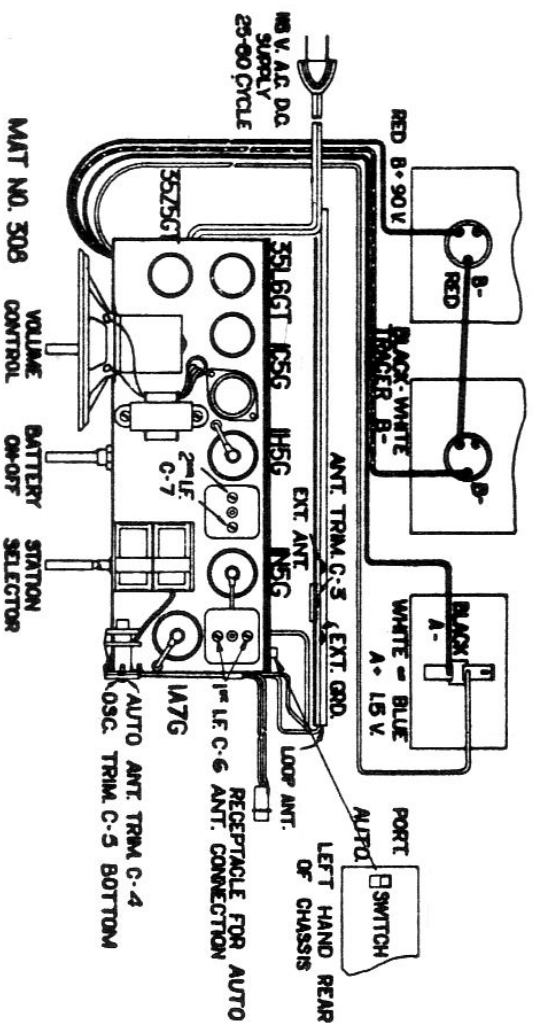

CHASSIS LAYOUT CHART