

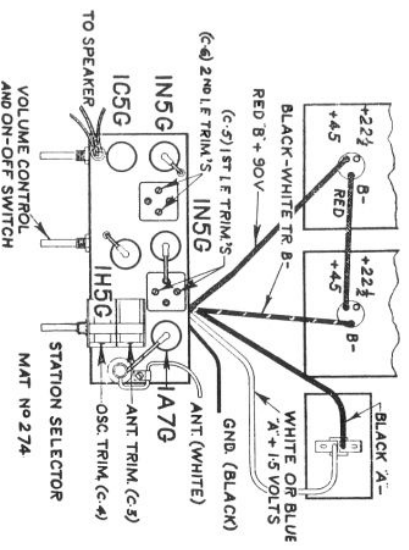
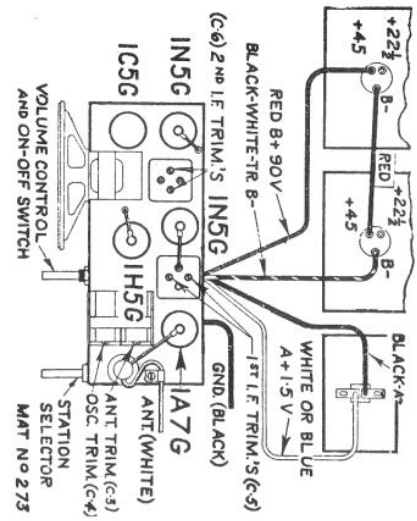


Phonola - Electrohome 40B51-E, 40B51-E-1, 40B51-E-2, 40B51-E-3, 40B51-M, 40B51-M-1, 40B51-M-2 & 40B51-P.

1. On our later models a .1 Meg. Resistor has been added to minimize grid current effect of the 1A7G tube.
2. Value of R6 later changed to .45 Ohms.

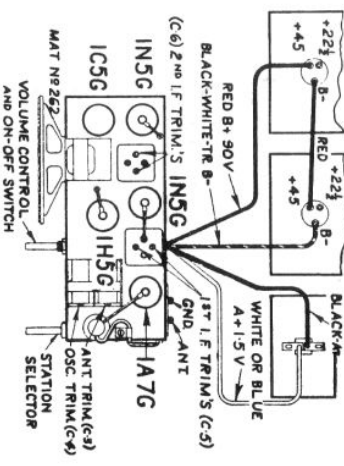

40B51-E, E-1, E-2, E-3

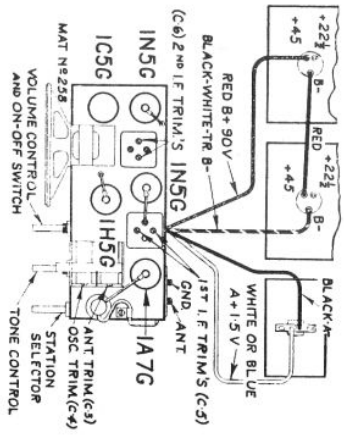

ALIGNMENT — PROCEED IN SEQUENCE LISTED

Band	Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note
2nd I. F.		.1 Mfd.	Grid of 1N5G I. F. Tube	1700 K.C.	455 K.C.	2nd I. F. C-6	Maximum Output	
1st I. F.		.1 Mfd.	Grid of 1A7G Converter	1700 K.C.	455 K. C.	1st I. F. C-5	Maximum Output	
Antenna 1460 K. C.		200 Mmfd.	Ant. & Gnd. Post	1460 K. C.	1460 K. C.	B.C. Osc. C-4 B.C. Ant. C-3	Maximum Output	
Oscillator 600 K. C.		200 Mmfd.	Ant. & Gnd. Post	600 K. C.	600 K. C.			Check Only

**Electrohome 40B51-E,
40B51-E-1, 40B51-E-2,
40B51-E-3, 40B51-M,
40B51-M-1, 40B51-M-2
& 40B51-P**