


# Electrohme

Model 218 (Chassis P3 4726)  
 Model 145 (Chassis P2 4726)  
 (P2-4726/z, P3-4726/z, S2-4726/z, S3-4725/z)

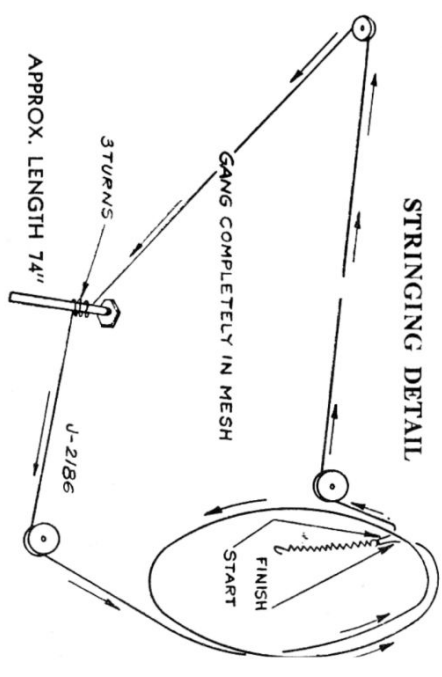

# Electrohome

## Model 218 (Chassis P3 4726) Model 145 (Chassis P2 4726)

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.	B.C.		Grid of 6SK7	1650 K.C.	455 K.C.	G-18	Maximum Output
1st I.F.	B.C.		Grid of 6SA7	1650 K.C.	455 K.C.	C-15	Maximum Output
1460 K.C.	B.C.	200 mmfd.	Antenna	1460 K.C.	1460 K.C.	G-13 G-3	Maximum Output
600 K.C.	B.C.	200 mmfd.	Antenna	600 K.C.	600 K.C.	G-14	Maximum Output
455 K.C.	B.C.	200 mmfd.	Antenna	1650 K.C.	455 K.C.	G-1	Minimum Output
15 M.C.	S.W.	400 ohm	Antenna	15 M.C.	15 M.C.	G-10 G-2	Maximum Output
6 M.C.	S.W.	400 ohm	Antenna	6 M.C.	6 M.C.	G-11	Maximum Output

