


Electrohome

- 155 (Chassis 1-4526, 1-4526Z)
- 158 (Chassis 4-4526, 4-4526Z)
- 216 (Chassis 2-4526, 2-4526Z)

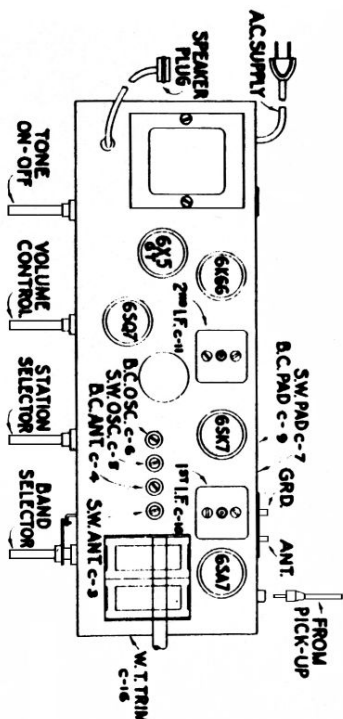

**Electrohme 155 (Chassis 1-4526, 1-4526Z)
158 (Chassis 4-4526, 4-4526Z)
216 (Chassis 2-4526, 2-4526Z)**

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting		Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.	B.C.	Blocking Condenser .05 mfd.	Grid of 6SK7	1650 K.C.	455 K.C.	C-11	Maximum Output
1st I.F.	B.C.	Blocking Condenser .05 mfd.	Grid of 6SA7	1650 K.C.	455 K.C.	C-10	Maximum Output
1460 K.C.	B.C.	200 mmfd.	Antenna	1460 K.C.	1460 K.C.	C-6 C-4	Maximum Output
600 K.C.	B.C.	200 mmfd.	Antenna	600 K.C.	600 K.C.	C-9	Maximum Output
455 K.C.	B.C.	200 mmfd.	Antenna	1650 K.C.	455 K.C.	C-16	Minimum Output
16 MTRS.	S.W.	400 ohm	Antenna	16 M.C.	16 M.C.	C-5 C-3	Maximum Output
6 MTRS.	S.W.	400 ohm	Antenna	6 M.C.	6 M.C.	C-7	Maximum Output