


ANT. BALANCING

Band Selector switch shown in extreme counter-clock-wise position (Phono numeral indicates wiper back from front chassis skirt and letter designates front or rear of indicated wiper)

All voltages measured to chassis with 20,000 ohm/volt meter at 117 volt line voltage and selector switch in FM position and zero input.


RECORD CHANGER

Webster Model 156, 25 cy Changer with QT3M Astatic Cartridge

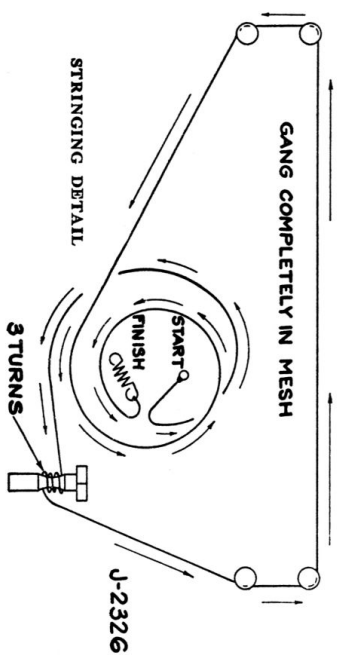

SPECIFICATIONS

Standard Broadcast Range..... 540Kc. - 1650Kc.
 Short Wave Range..... 5.7Mc. - 17.5Mc.
 Frequency Modulation Range..... 88 Mc. - 108 Mc.
 Intermediate Frequency (AM)..... 485 Kc.
 Intermediate Frequency (FM)..... 10.7 Mc.
 Power Consumption (Radio Only)..... 106 Watts
 Power Consumption (Radio and Phono)..... 125 Watts
 Undistorted Output..... 6.5 Watts
 Maximum Power Output..... 8.1 Watts

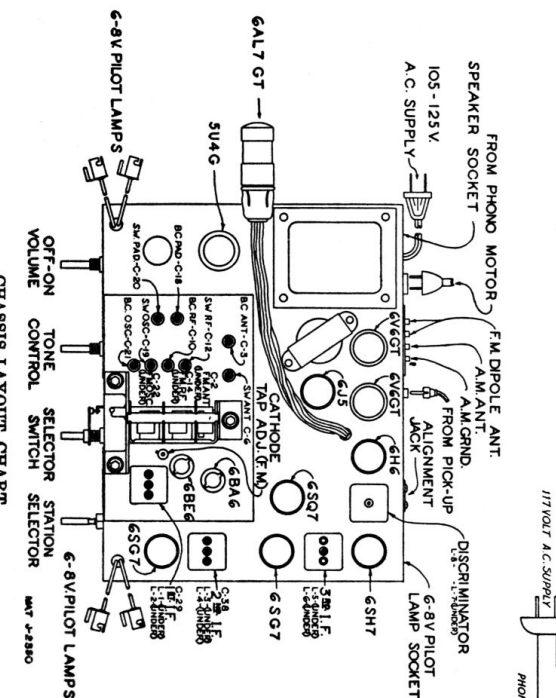

INT. FREQS.: 455 KC. AM.; 10.7 MC. FM.

F.M. SENSITIVITY FOR 50 MICROWATTS	10.7	100	1000	10000	100000
REQUENCY IN MC.S.	10.7	100	1000	10000	100000
AM SENSITIVITY FOR 50 MICROWATTS	1.455	400	1	10	100
FIGURES IN PARENTHESIS REPRESENT NOMINAL VALUES					

Electrohome 312A