


ALIGNMENT AND SENSITIVITY SIGNAL GENERATOR MODULATED 30% AT 400 CYCLES
 *100 MILLIVOLTS ACROSS DIODE LOAD OR 20MV AT AUDIO TAKE OFF POINT ("E")

STEP	APPLY SIGNAL AT KC	THRU SERIES SET DUMMY AT KC	ADJUST FOR MAX. OUTPUT	* NOMINAL SENSITIVITY
1	455	PIN 1-V3	MIN CAP	6000 uv
2	455	PIN 7, V2 SBEC	MIN CAP	300 uv
3	460	EXT ANT CONN.	1460 KC	1.8 uv
4	600	EXT ANT CONN.	600 KC	2.0 uv
5	535 550 605	EXT ANT CONN.	TUN E THRU	CHECK ONLY

REPLACEMENT PARTS LIST

Symbol	Part No.	Description
T1	21-410-01	B.C. Antenna Coil
T2	21-428-01	B.C. Int. Coil
T3	21-421-01	B.C. Osc. Coil
T4	21-432-01	AM I.F. Transformer 1st.
T5	21-432-03	AM I.F. Transformer 2nd.
C1	45-41-01	Gang Condenser

Electrohome Glenwood & Selkirk AM Tuner

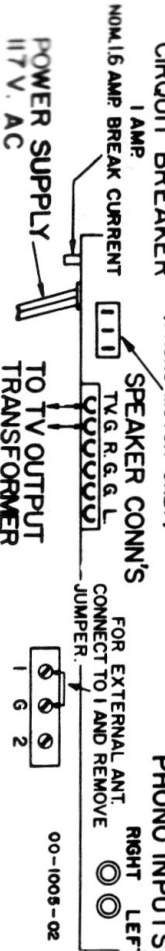

00-1005-02

