



# Phonola - Electrohome 9B51-P, 9B51-P-1 & 9AB51-M

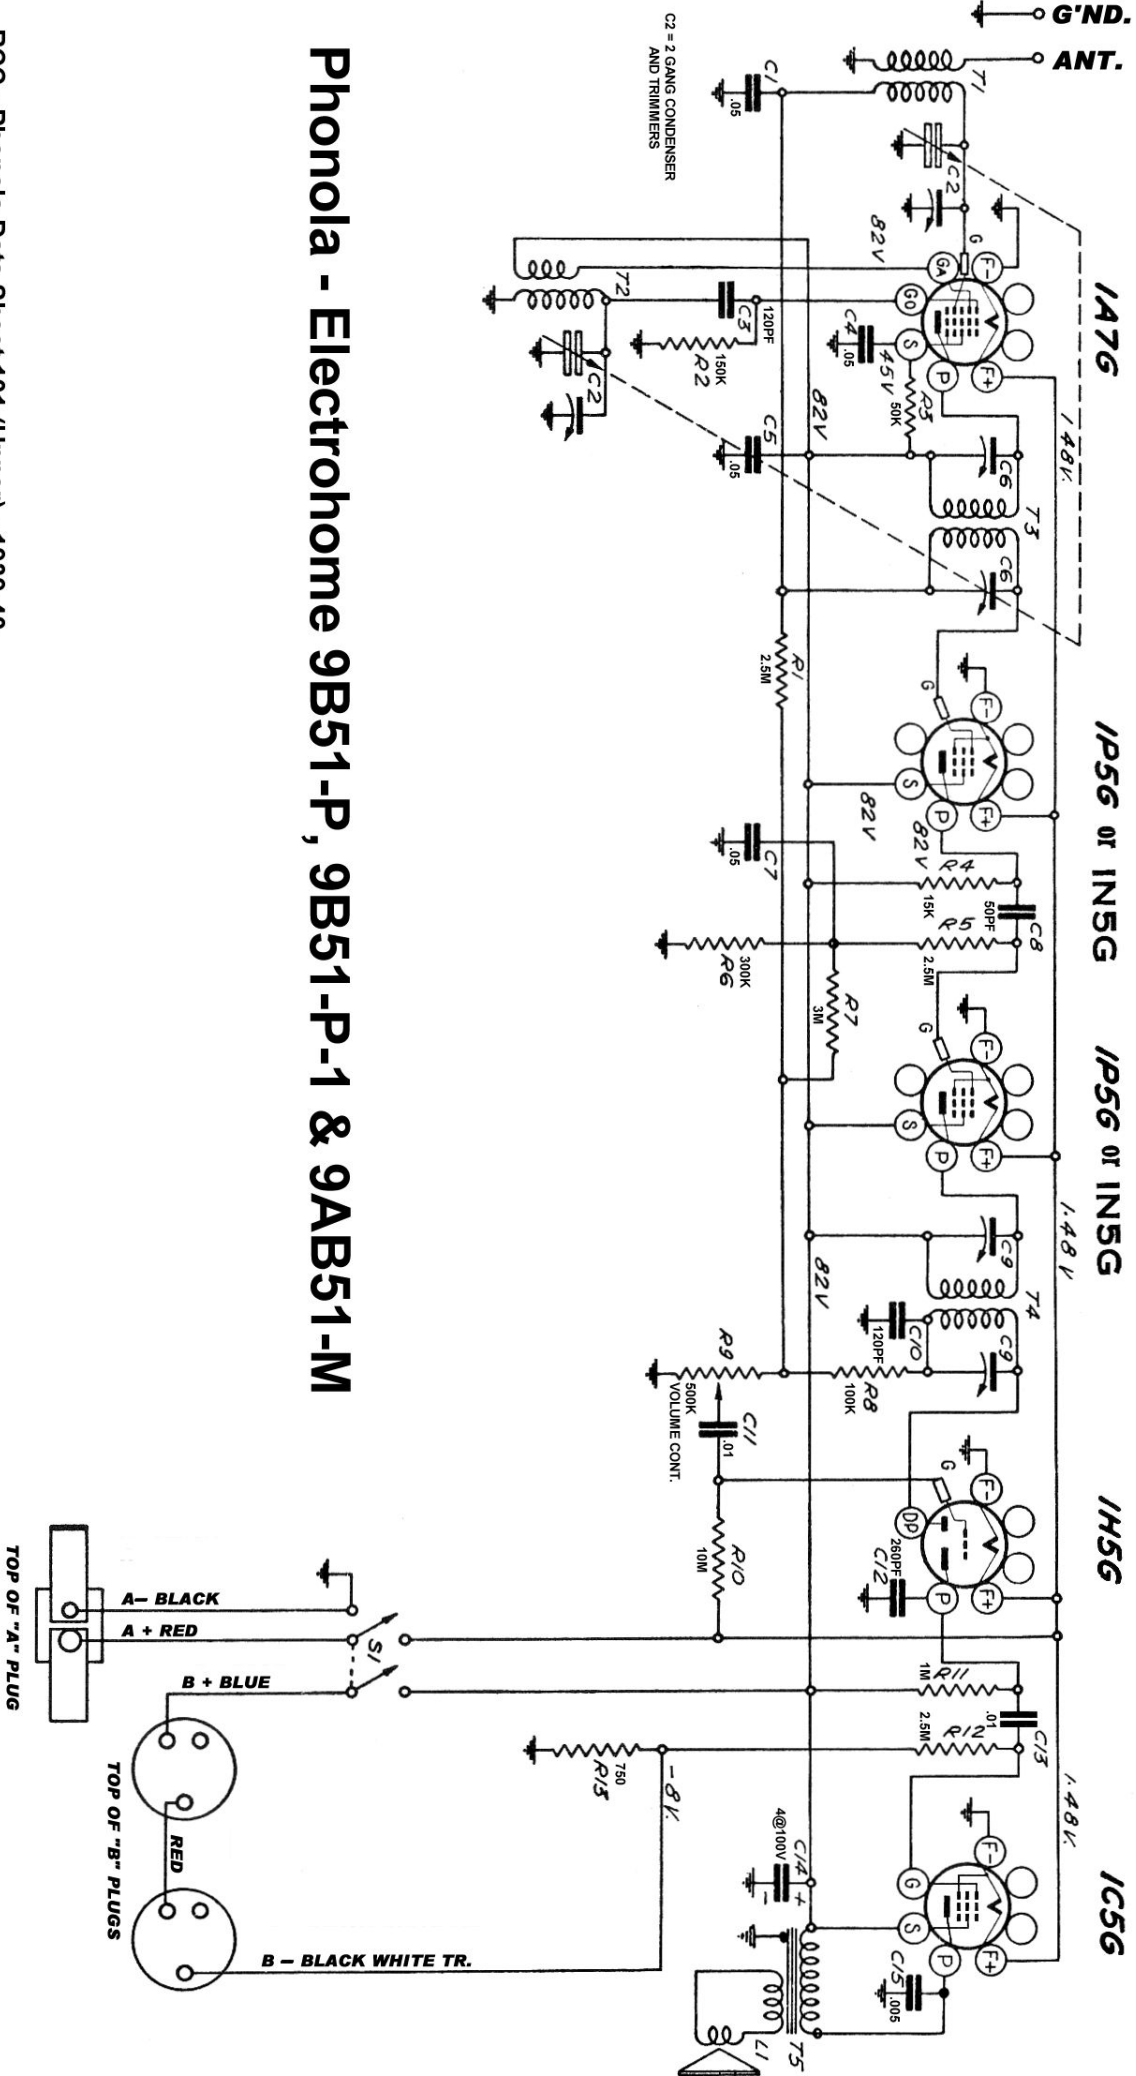

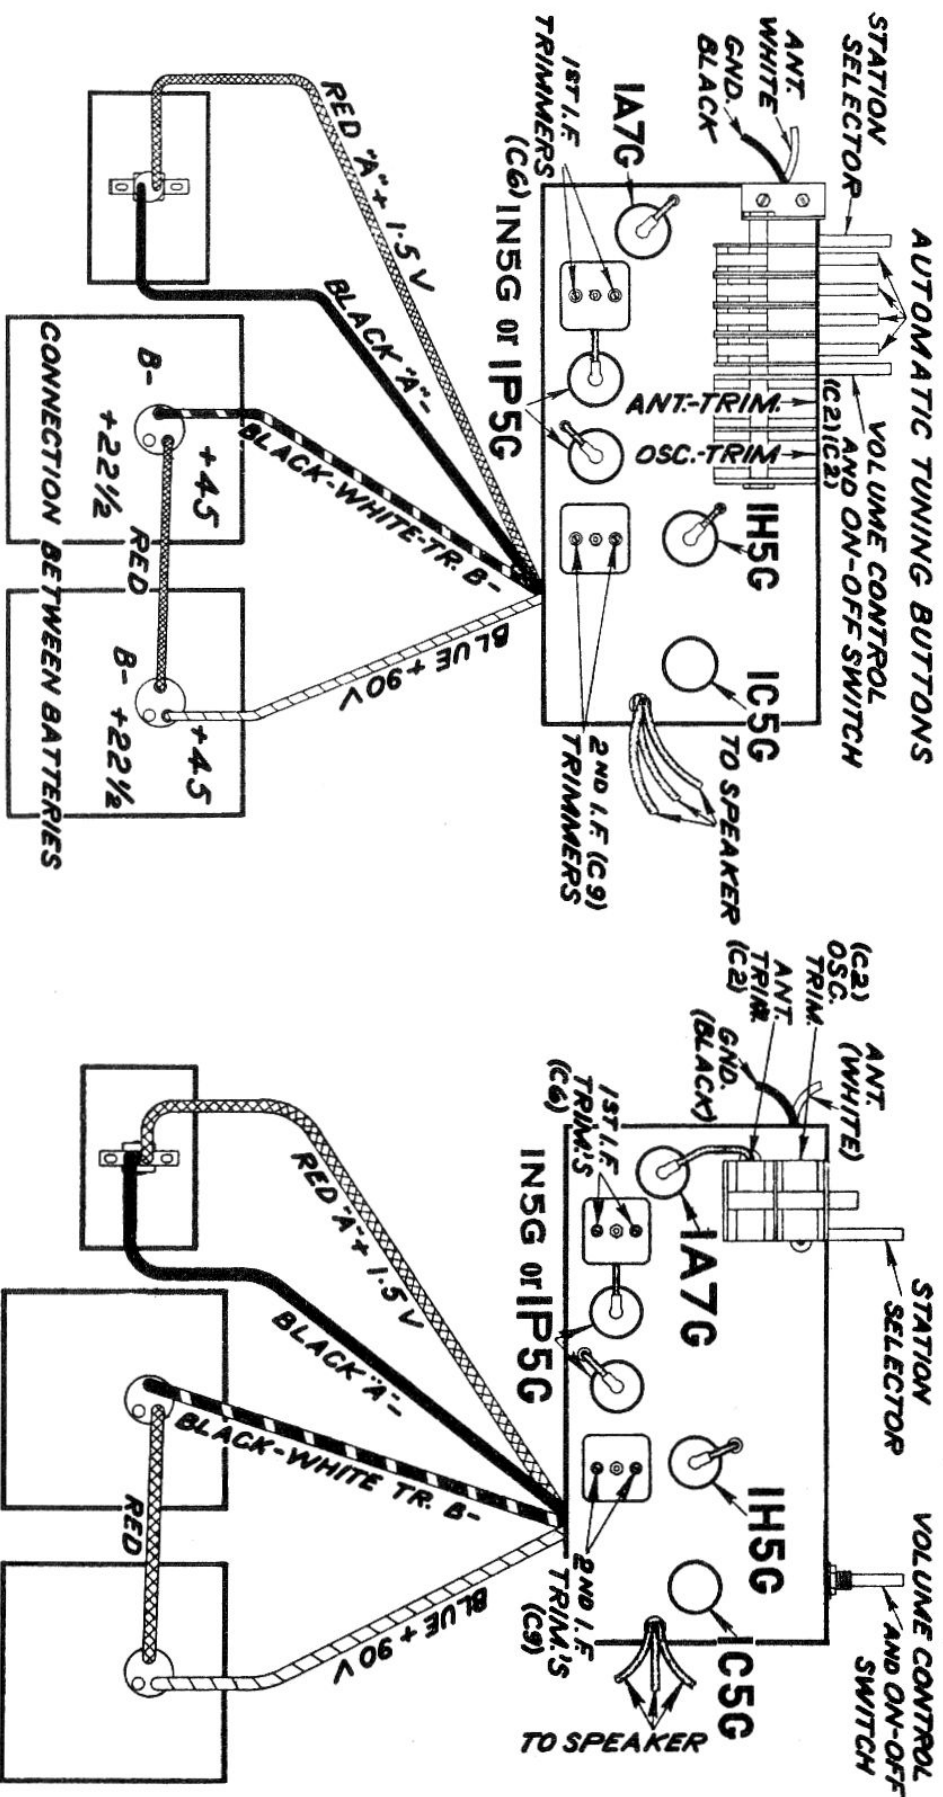

## Electrohme 9B51-P, 9B51-P-1 & 9AB51-M

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.		.1 Mfd.	Grid of 1P5G or 1N5G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-9	Maximum Output		1900 Microvolts
1st I. F.		.1 Mfd.	Grid of 1A7G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-8	Maximum Output		120 Microvolts
1460 K. C.		200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-2 R. C. Ant. C-2	Maximum Output		85 Microvolts
600 K. C.		200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	30 Microvolts