


Phonola - Electrohome 9CB41-E

RCC - Phonola Data Sheet 95 (Lower) - 1939-40

Alignment & Layout

Electrohome 9CB41-E

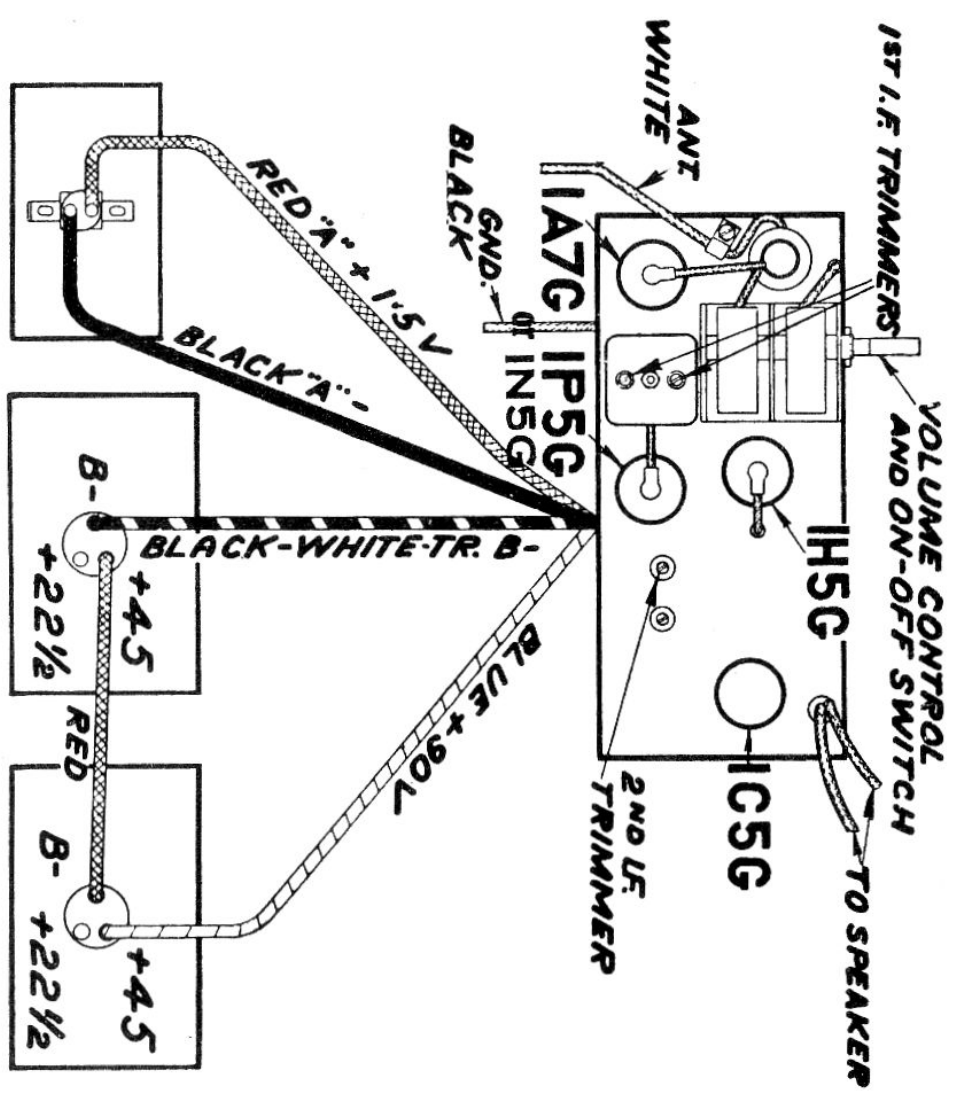

Also 9B41-P, 9B41-P-1
 9B41-E, 9B41-S
 9B41-M

ALIGNMENT ----- PROCEED IN SEQUENCE LISTED

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.		.1 Mfd.	Grid of 1P5G or 1N5G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-6	Maximum Output		11000 Microvolts
1st I. F.		.1 Mfd.	Grid of 1A7G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-5	Maximum Output		210 Microvolts
1460 K. C.		200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-2 B. C. Ant. C-2	Maximum Output		55 Microvolts
600 K. C.		200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	50 Microvolts