


Phonola - Electrohme 9LB51-D, 9LB51-E, 9LB51-S & 9LB51-P

Alignment & Layout

Electrohome

9LB51-D, 9LB51-E, 9LB51-S & 9LB51-P

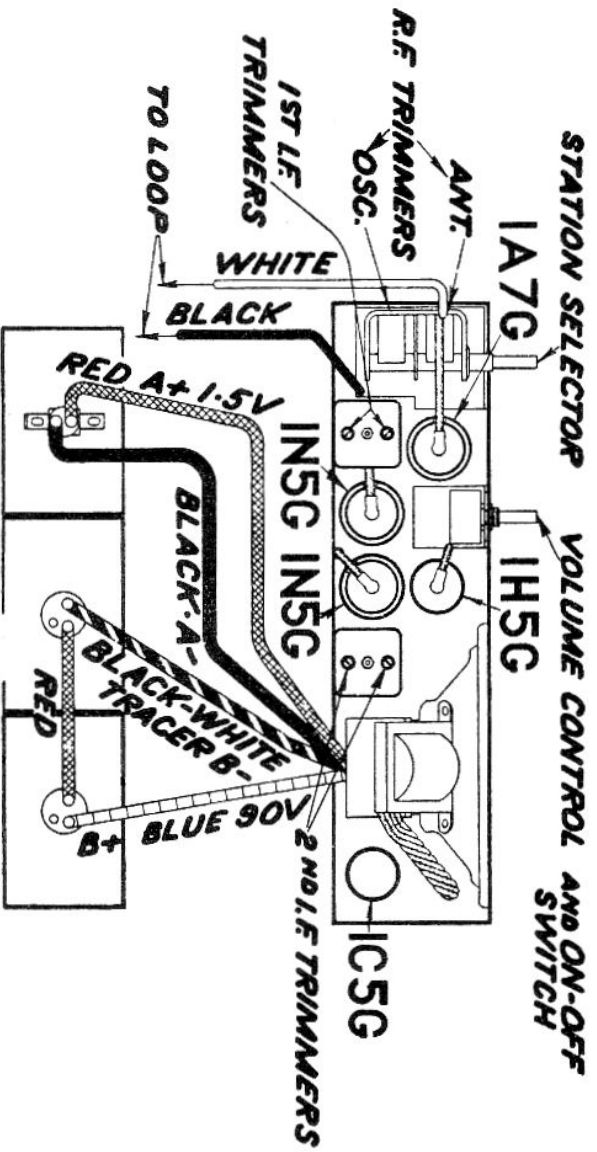

ALIGNMENT ---- PROCEED IN SEQUENCE LISTED

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.		.1 Mfd.	Grid of 1N5G I. F. Tube	1600 K. C.	455 K. C.	2nd I. F. C-9	Maximum Output		1800 Microvolts
1st I. F.		.1 Mfd.	Grid of 1A7G 1st Detector	1600 K.C.	455 K. C.	1st I. F. C-5	Maximum Output		120 Microvolts
1460 K. C.		400 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-2 B. C. Ant. C-2	Maximum Output		30 Microvolts
600 K. C.		400 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	25 Microvolts