

NOTE:
CHASSIS GROUND ONLY
NOT EXTERNAL


WINDING POLARITY
"S" DESIGNATES START OF WINDING
"F" DESIGNATES FINISH OF WINDING

NOTE:
* 1000 VOLT TEST
ALL VOLTAGES MEASURED TO B--

Phonola - Electrohome 9U51-E

Alignment & Layout

Electrohome 9U51-E

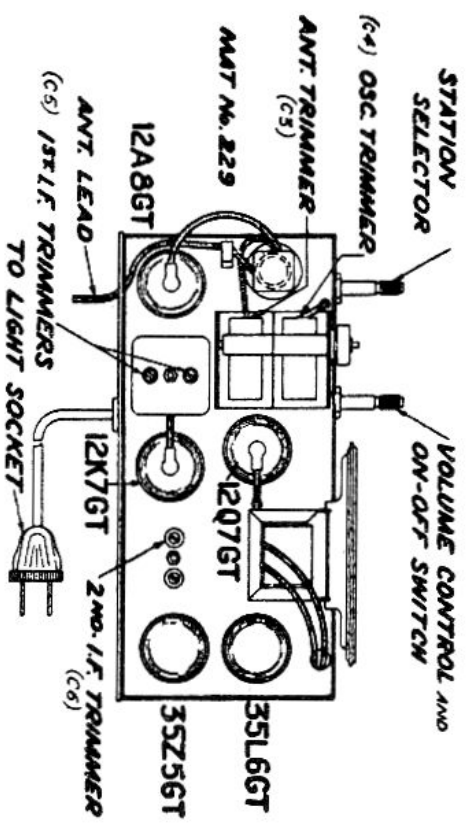

ALIGNMENT ----- PROCEED IN SEQUENCE LISTED

Band	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.	.1 Mfd.	Grid 12K7-GT I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-6	Maximum Output		9000 Microvolts
1st I. F.	.1 Mfd.	Grid 12A8-GT 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-5	Maximum Output		350 Microvolts
1460 K. C.	200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-4 B. C. Ant. C-3	Maximum Output		100 Microvolts
600 K. C.	200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	100 Microvolts