



Phonola - Electrohome Z9A61-L

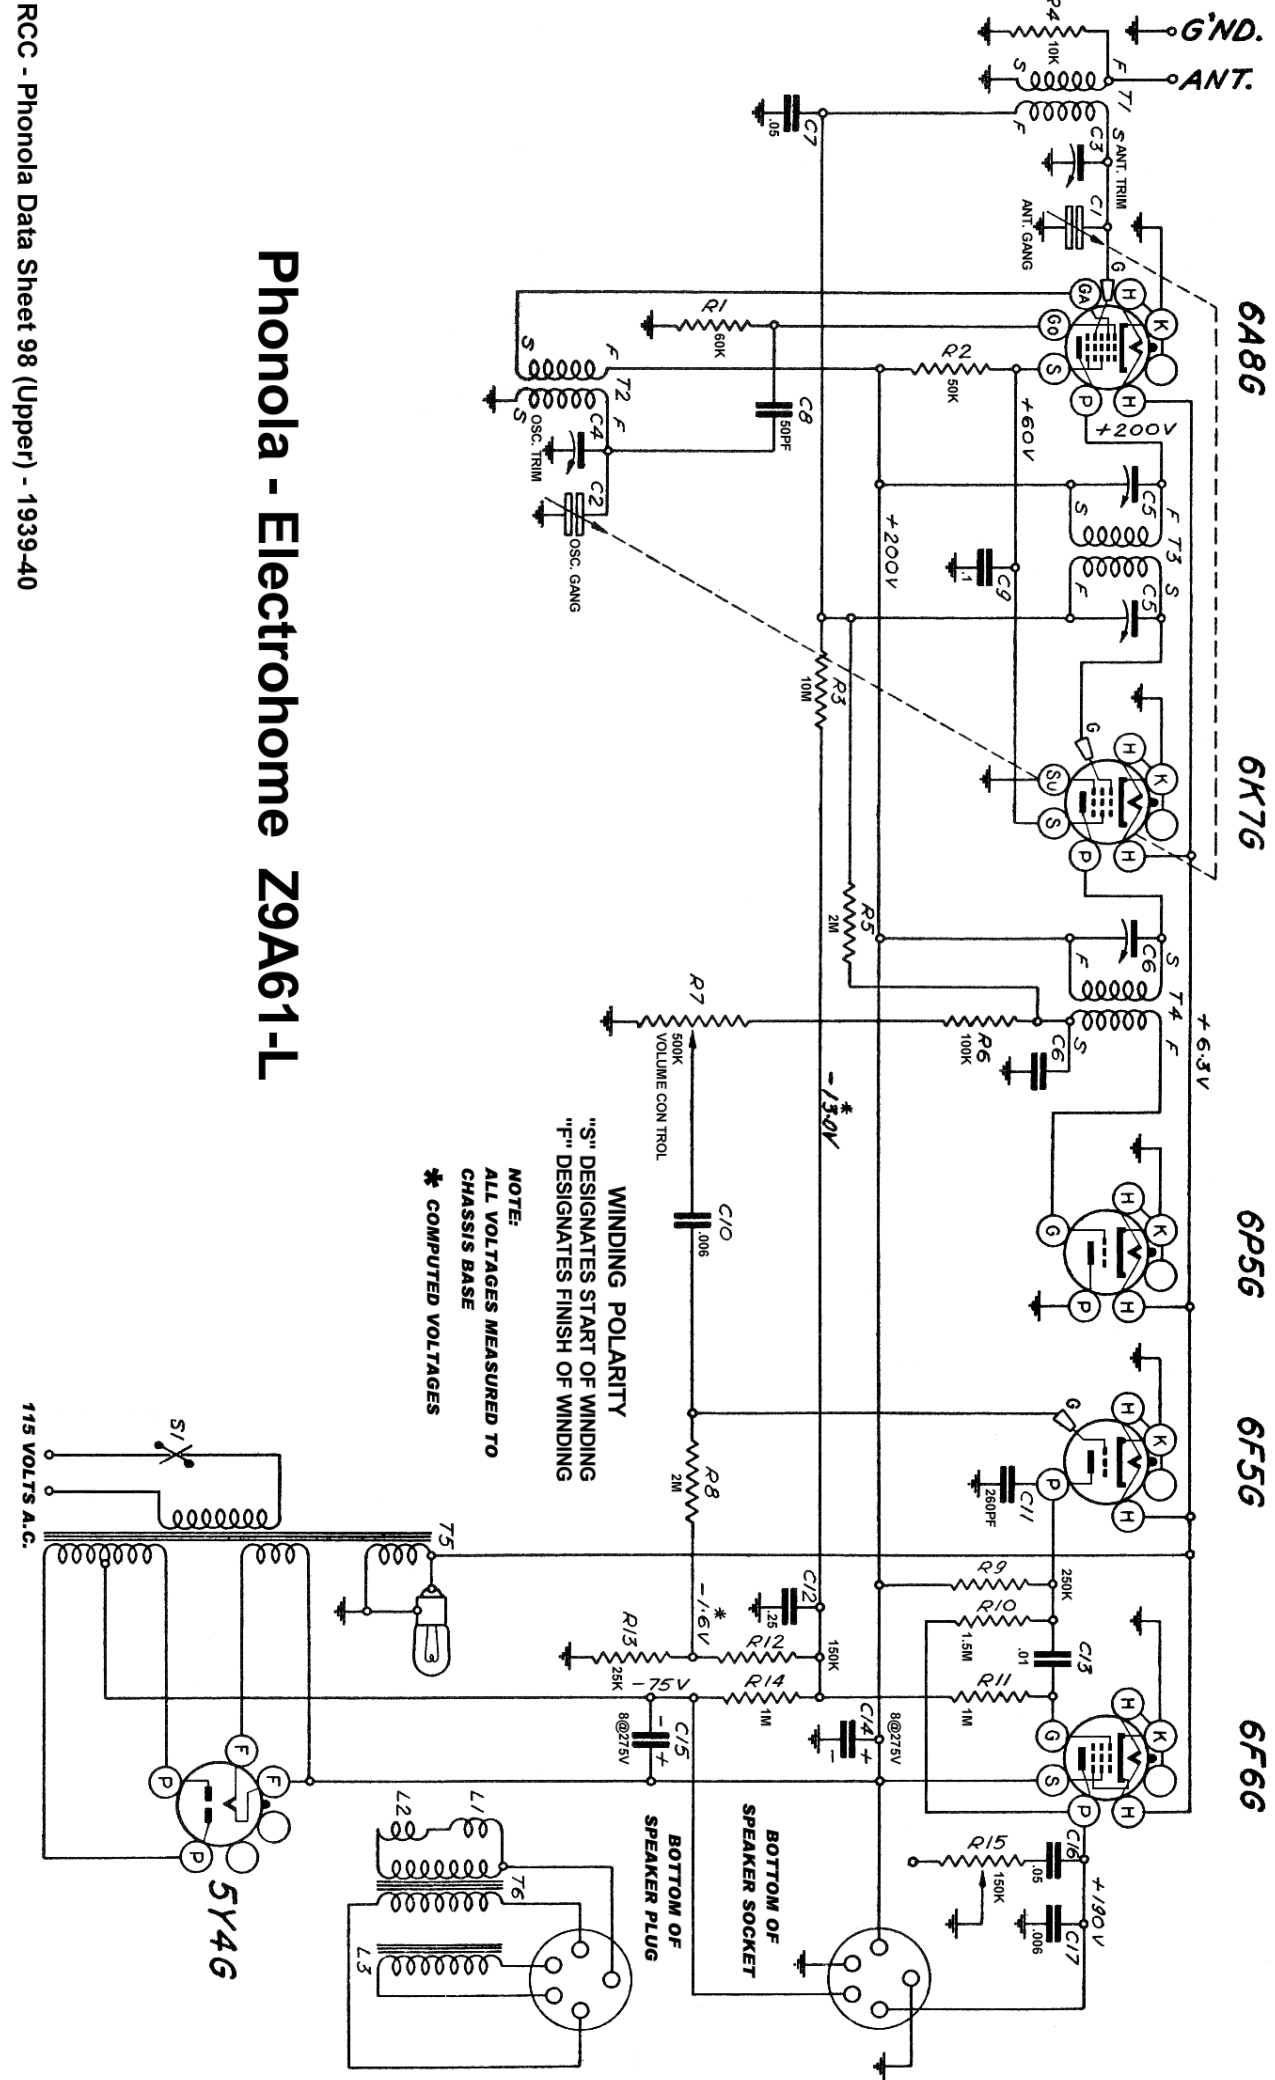

Alignment & Layout

Electrohome Z9A61-L

A.C. Radio Service Data

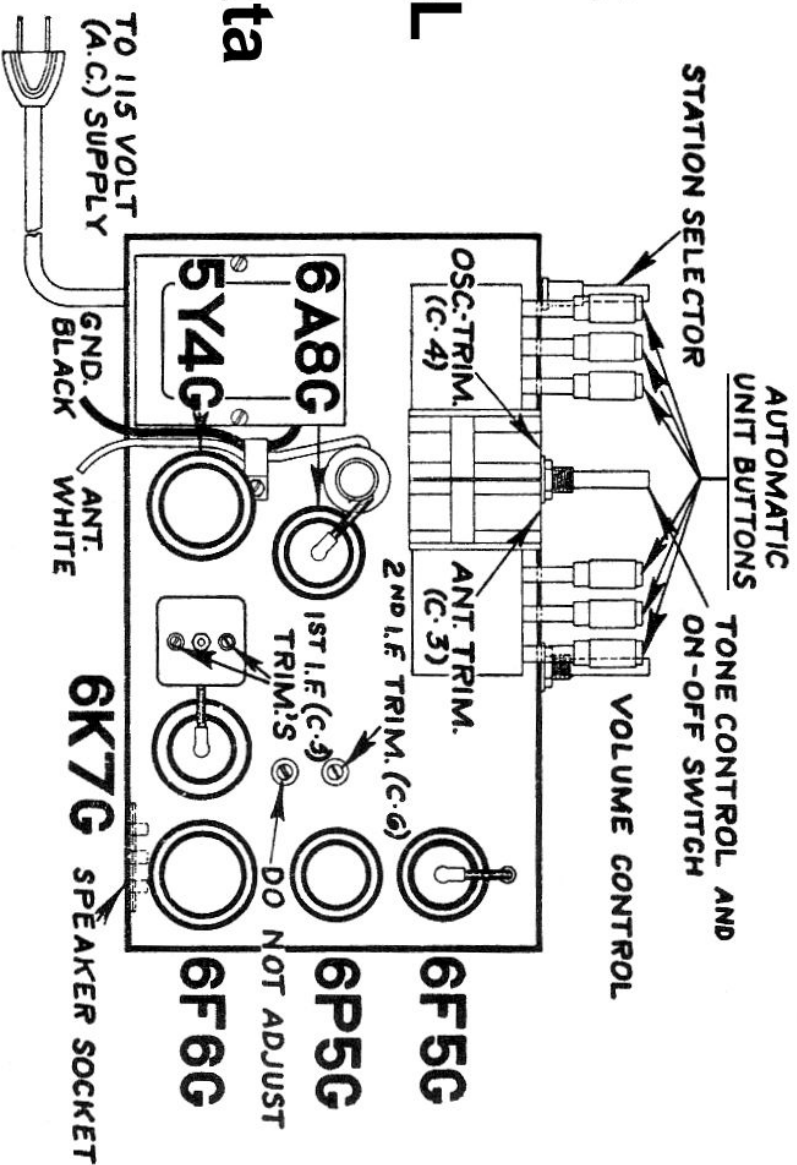

ALIGNMENT — PROCEED IN SEQUENCE LISTED

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.		.1 Mfd.	Grid of 6K7G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-6	Maximum Output		4500 Microvolts
1st I. F.		.1 Mfd.	Grid of 6A8G 1st Detector	1700 K. C.	455 K. C.	1st I. F. C-5	Maximum Output		170 Microvolts
1460 K. C.		200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-4 B. C. Ant. C-3	Maximum Output		45 Microvolts
600 K. C.		200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	45 Microvolts