



Sparton 6151 A.C. Receiver / Phonograph

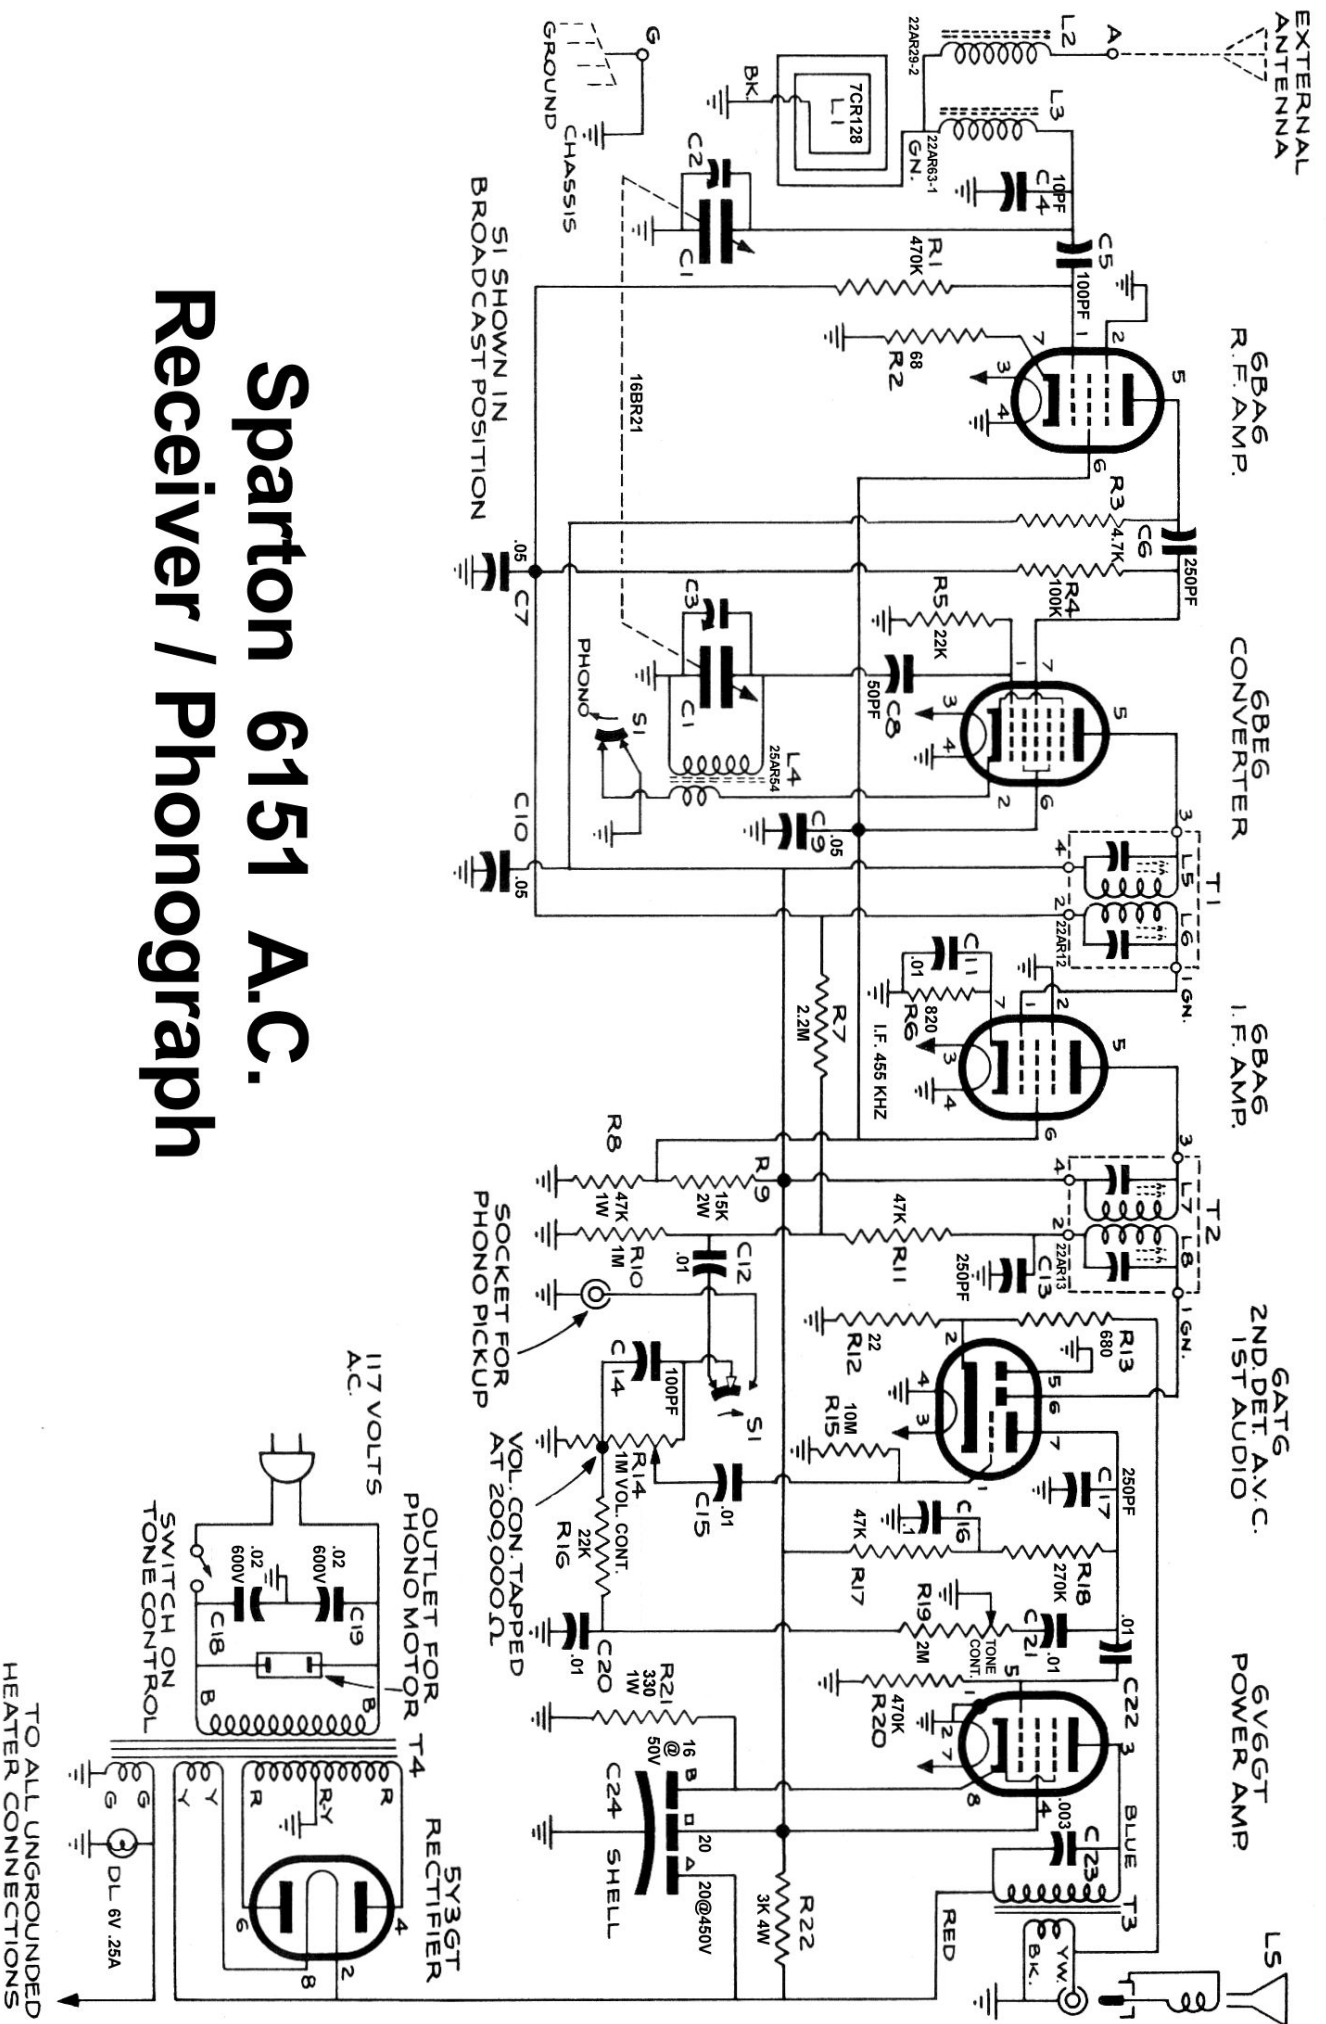

Sparton 6151 A.C. Receiver Phonograph

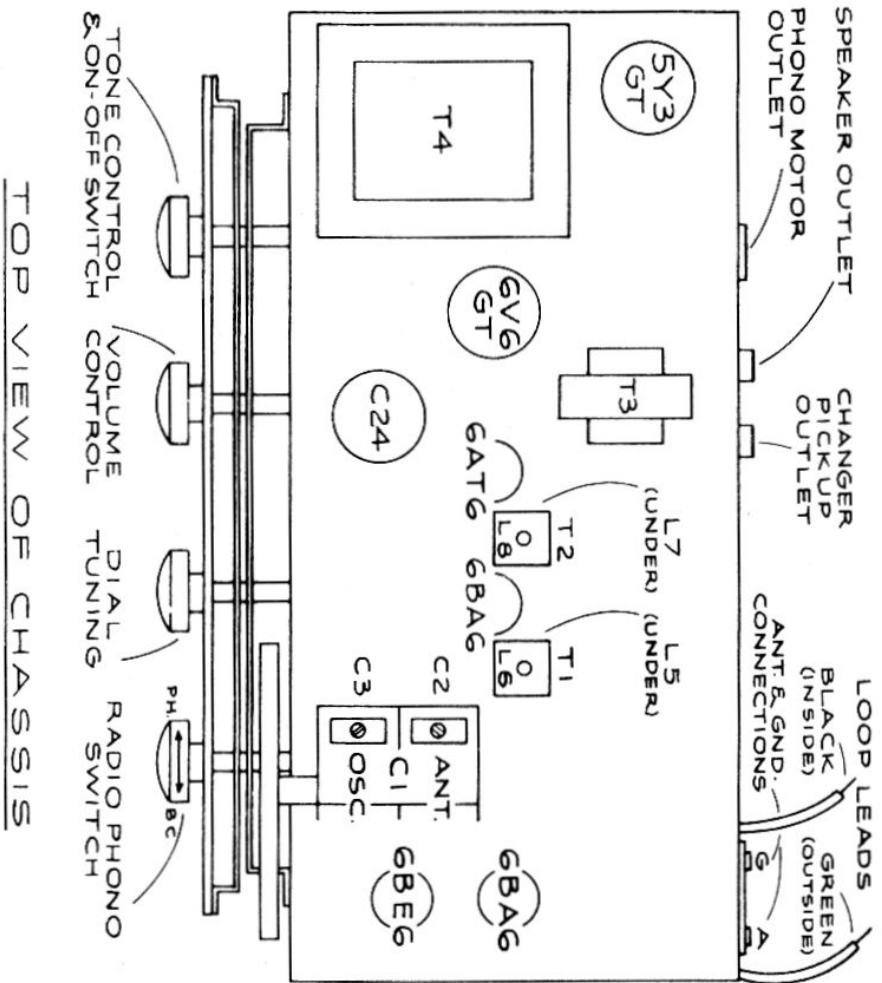

ELECTRICAL ALIGNMENT

1. Connect Sig. Gen. at 455 Kcs. (I.F.) to stator lug C2 (Ant.-rear section of Variable Capacitor) through .01 mfd. capacitor and chassis, dial at 1500 Kcs. Adjust I.F. Transformers at top and bottom doing T2 - L8, L7 then T1 - L6, L5 for maximum output.
2. Band switch on Broadcast, dial at 1500 Kcs. connect Sig. Gen. to Ant. terminal (through 200 mfd. dummy Ant.) and Gnd; at 1500 Kcs. trim C3 for frequency setting and C2 for max. output.

