
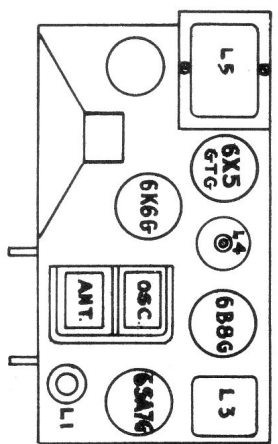


1946-47

No.	Dummy Antenna	Connection of Signal Generator to Receiver	Signal Generator Frequency	Receiver Dial Setting	Trimmers to be Adjusted	Description of Adjustment
1	.1 mfd cond.	Stator terminal on front (Antenna) section of gang	455 kc	Anywhere that does not affect the signal	2nd I.F. 1st I.F.	Peak both transformers for maximum output, then repeat until no further increase in output can be obtained
2	Standard Dummy Antenna	Antenna wire	1500 kc	1500 kc	Oscillator trimmer on rear section of gang	Adjust to bring in signal
3	Standard Dummy Antenna	Antenna wire	1500 kc	Tune to signal	Antenna trimmer on front section of gang	Adjust for maximum output, while rocking the gang slightly

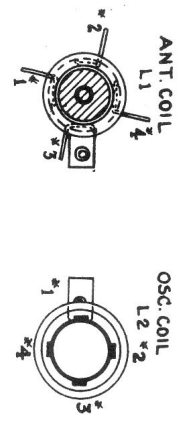

MODEL R514

NOTE: A 200 mmf condenser may be used in place of the Standard Dummy Antenna.