


VIKING 54-17R, 52-17

ALIGNMENT AND SENSITIVITY

STEP	APPLY SIGNAL AT KC.	TO	THRU SERIES DUMMY	SET GANG AT	ADJUST FOR MAX.OUTPUT	NOMINAL SENSITIVITY 50 MILLI-WATTS OUTPUT AT 400 C/S.
1	455	12BA6 *1 PIN	.05	MINIMUM CAPACITY	2ND. I.F	2000
2	455	12BE6 *7 PIN	.05	MINIMUM CAPACITY	1ST. I.F 2ND. I.F	60
3	1640	ANT.	400 Ω	MINIMUM CAPACITY	OSC. TRIM.	
4	1460	ANT.	400 Ω	RESONANCE	ANT. TRIM.	20
5	600	ANT.	400 Ω	RESONANCE	CHECK ONLY	20
6	530	ANT.	400 Ω	MAXIMUM CAPACITY	CHECK ONLY	

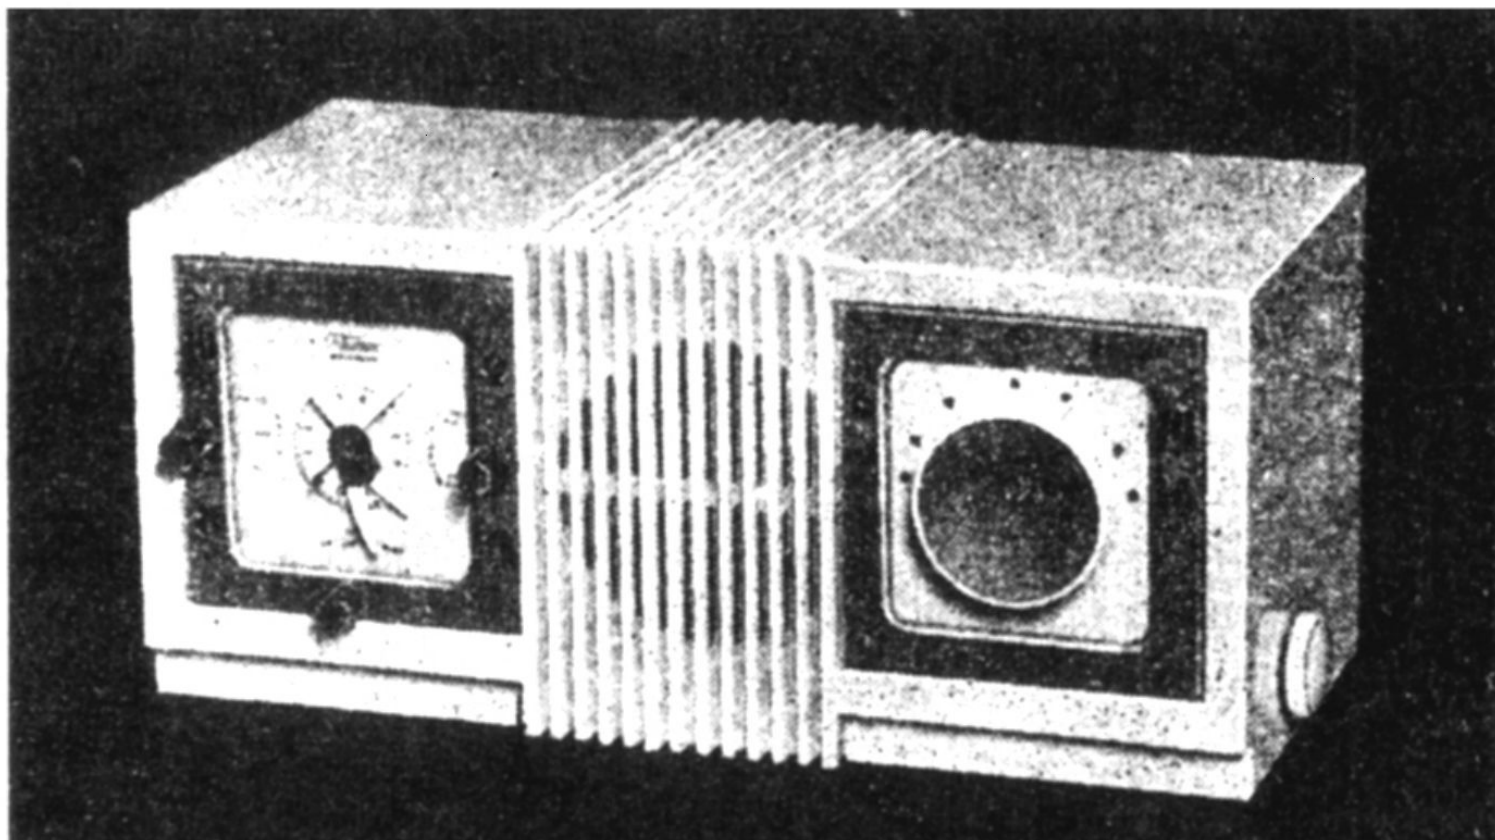

VIKING 54-17R, 52-17